


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:221.9V I:0.1347A P:29.084W PF:0.9728 Freq:50.00Hz Lamp Flux:2641.55x1 lm		
Name: PU-TL-30-930-38D	Type: LED	
MFR.:		

DATA OF LAMP		PHOTOMETRIC DATA Eff: 90.83 lm/W			
MODEL		I _{max} (cd)	4909	S/MH (C0/180)	0.65
NOMINAL POWER (W)	30	LOR (%)	100.0	S/MH (C90/270)	0.62
RATED VOLTAGE (V)	220	TOTAL FLUX (lm)	2641.5	η UP, DN (C0-180)	0.3, 50.5
NOMINAL FLUX (lm)	2641.55	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.7, 48.5
LAMPS INSIDE	1	η up (%)	1.0	CIBSE SHR NOM	0.50
TEST VOLTAGE (V)	220.4	η down (%)	99.0	CIBSE SHR MAX	0.65

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

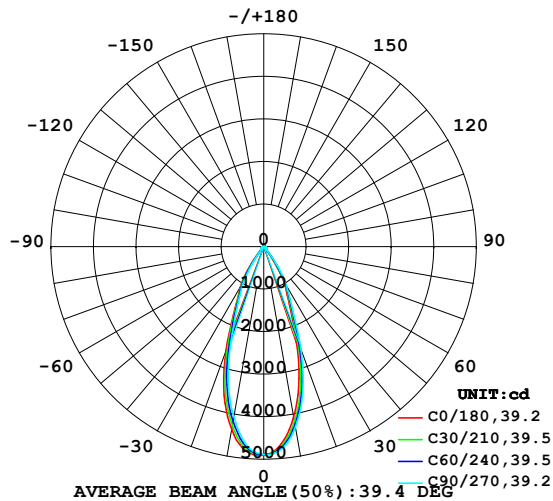

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

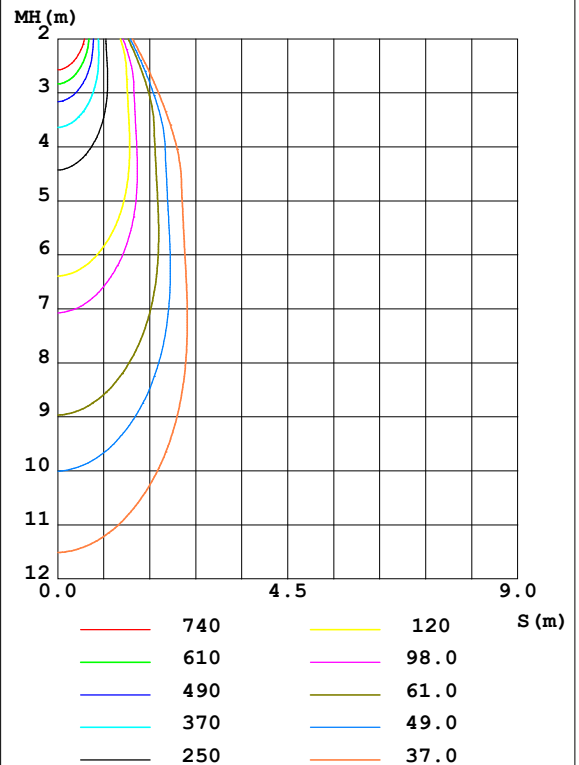

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2024-04-09

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7125]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	4069	4207	4304	4358	4354	4213	4067	4036	0- 10	435.1	435.1	16.5,16.5
20	2159	2394	2551	2619	2598	2396	2187	2130	10- 20	926.6	1362	51.5,51.5
30	937.3	1024	1083	1112	1106	1024	939.4	920.1	20- 30	708.5	2070	78.4,78.4
40	102.8	128.6	147.1	157.7	158.1	135.4	110.6	102.2	30- 40	320.0	2390	90.5,90.5
50	70.58	72.87	75.16	78.00	79.67	77.13	73.73	71.85	40- 50	71.13	2461	93.2,93.2
60	51.94	53.03	54.13	55.51	56.35	55.23	53.67	52.70	50- 60	56.82	2518	95.3,95.3
70	38.75	39.93	41.10	42.47	43.39	42.85	41.73	40.39	60- 70	46.81	2565	97.1,97.1
80	19.68	23.11	25.91	28.26	29.32	27.09	24.01	21.73	70- 80	36.28	2601	98.5,98.5
90	0.6931	0.7206	1.587	4.012	6.255	6.414	5.518	3.560	80- 90	13.95	2615	99,99
100	1.317	0.6351	1.161	3.781	6.436	7.095	6.583	4.551	90-100	3.896	2619	99.1,99.1
110	2.100	1.407	1.956	4.662	7.400	8.073	7.538	5.439	100-110	4.664	2624	99.3,99.3
120	2.647	2.017	2.569	5.190	7.811	8.344	7.729	5.744	110-120	5.077	2629	99.5,99.5
130	2.808	2.328	2.815	5.012	7.175	7.488	6.865	5.253	120-130	4.662	2633	99.7,99.7
140	2.663	2.353	2.702	4.227	5.701	5.803	5.281	4.216	130-140	3.562	2637	99.8,99.8
150	2.557	2.423	2.593	3.312	3.997	4.005	3.726	3.241	140-150	2.309	2639	99.9,99.9
160	2.324	2.306	2.394	2.680	2.937	2.898	2.751	2.564	150-160	1.363	2641	100,100
170	2.066	2.092	2.124	2.177	2.215	2.191	2.147	2.108	160-170	0.6716	2641	100,100
180	2.011	2.011	2.013	2.020	2.025	2.017	2.008	2.007	170-180	0.1972	2642	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 2428 lm

%lum = 91.9%

%lamp = 91.9%

Conical surface Flux(120deg): 2518.1 lm

%lum = 95.3%


%lamp = 95.3%

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-04-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity:65.0%
 Test Distance:8.000m [K=0.7125]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:221.9V I:0.1347A P:29.084W PF:0.9728 Freq:50.00Hz Lamp Flux:2641.55x1 lm		
Name: PU-TL-30-930-38D	Type: LED	
MFR.:		

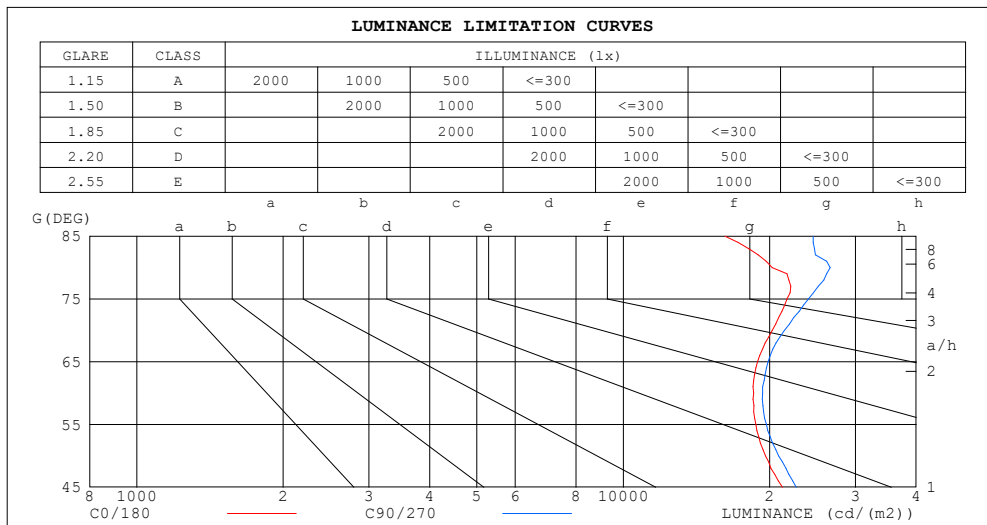

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	16211	24575
80	20239	26648
75	21706	24041
70	20234	21457
65	18890	19863
60	18551	19330
55	18737	19695
50	19606	20879
45	21242	22679


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-04-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7125]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:221.9V I:0.1347A P:29.084W PF:0.9728 Freq:50.00Hz		
Lamp Flux:2641.55x1 lm		
Name: PU-TL-30-930-38D	Type: LED	
MFR.:		

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.01	1.01	1.01	.99
1.0	1.10	1.08	1.05	1.08	1.06	1.04	1.04	1.02	1.00	.90	.98	.97	.96	.95	.94	.92
2.0	1.03	.99	.95	1.01	.97	.94	.98	.95	.92	.95	.92	.90	.92	.90	.88	.86
3.0	.96	.92	.88	.95	.90	.87	.92	.88	.85	.90	.87	.84	.87	.85	.83	.81
4.0	.91	.85	.81	.90	.85	.81	.87	.83	.80	.85	.82	.79	.83	.80	.78	.76
5.0	.86	.80	.76	.85	.80	.76	.83	.78	.75	.81	.77	.74	.79	.76	.73	.72
6.0	.81	.76	.72	.80	.75	.71	.79	.74	.71	.77	.73	.70	.76	.72	.70	.68
7.0	.77	.71	.68	.76	.71	.67	.75	.70	.67	.74	.70	.66	.73	.69	.66	.65
8.0	.73	.68	.64	.73	.68	.64	.72	.67	.64	.71	.66	.63	.70	.66	.63	.62
9.0	.70	.65	.61	.69	.64	.61	.69	.64	.60	.68	.63	.60	.67	.63	.60	.59
10.0	.67	.62	.58	.66	.61	.58	.66	.61	.58	.65	.61	.58	.64	.60	.57	.56

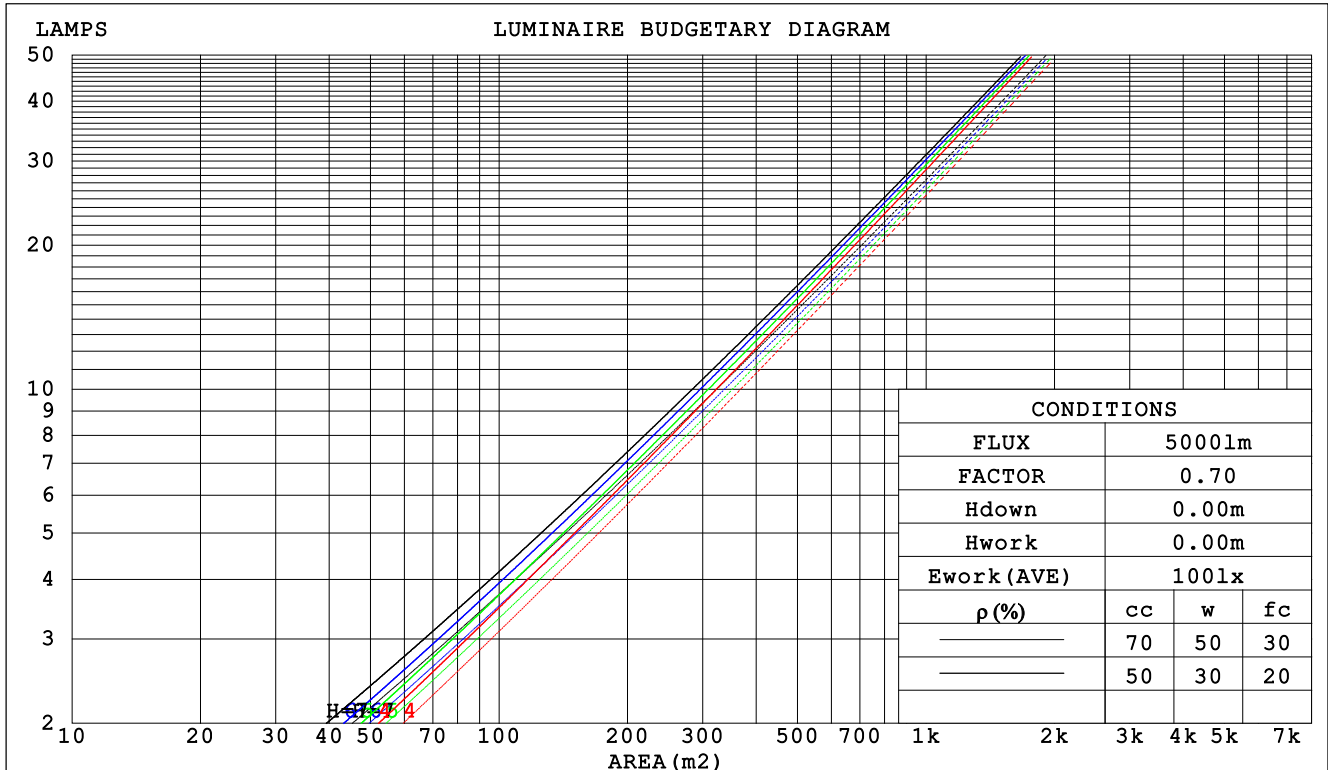

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-04-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7125]
Remarks:

WEC AND CCEC

Test:U:221.9V I:0.1347A P:29.084W PF:0.9728 Freq:50.00Hz		
Lamp Flux:2641.55x1 lm		
Name: PU-TL-30-930-38D	Type: LED	
MFR.:		

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients (WEC)										
0.0																	
1.0	.182	.104	.033	.175	.100	.032	.162	.093	.030	.150	.086	.028	.139	.080	.026		
2.0	.170	.093	.029	.164	.091	.028	.153	.085	.026	.143	.080	.025	.133	.075	.024		
3.0	.159	.085	.025	.154	.083	.025	.145	.078	.024	.136	.074	.023	.128	.071	.022		
4.0	.150	.078	.023	.145	.076	.022	.137	.073	.022	.129	.069	.021	.122	.066	.020		
5.0	.141	.072	.021	.137	.070	.021	.130	.068	.020	.123	.065	.019	.117	.063	.019		
6.0	.133	.067	.019	.130	.066	.019	.124	.063	.018	.118	.061	.018	.112	.059	.018		
7.0	.127	.063	.018	.124	.062	.018	.118	.060	.017	.113	.058	.017	.108	.056	.016		
8.0	.120	.059	.017	.118	.058	.016	.113	.056	.016	.108	.055	.016	.104	.053	.016		
9.0	.115	.056	.016	.113	.055	.015	.108	.054	.015	.104	.052	.015	.100	.051	.015		
10.0	.110	.053	.015	.108	.052	.015	.104	.051	.014	.100	.050	.014	.097	.049	.014		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.198	.198	.198	.169	.169	.169	.116	.116	.116	.066	.066	.066	.021	.021	.021	
1.0	.179	.165	.152	.153	.142	.131	.105	.097	.091	.060	.056	.053	.019	.018	.017	
2.0	.164	.140	.120	.140	.121	.104	.096	.084	.073	.055	.049	.043	.018	.016	.014	
3.0	.151	.121	.098	.129	.105	.085	.089	.073	.059	.051	.042	.035	.016	.014	.011	
4.0	.140	.107	.081	.120	.092	.070	.083	.064	.050	.048	.038	.029	.015	.012	.010	
5.0	.131	.095	.068	.112	.082	.059	.077	.057	.042	.045	.034	.025	.014	.011	.008	
6.0	.123	.085	.059	.106	.074	.051	.073	.052	.036	.042	.030	.021	.014	.010	.007	
7.0	.116	.078	.051	.100	.067	.044	.069	.047	.031	.040	.028	.019	.013	.009	.006	
8.0	.110	.071	.045	.095	.062	.039	.065	.043	.028	.038	.026	.017	.012	.008	.005	
9.0	.105	.066	.040	.090	.057	.035	.062	.040	.025	.036	.024	.015	.012	.008	.005	
10.0	.100	.062	.036	.086	.053	.032	.060	.038	.022	.035	.022	.013	.011	.007	.004	

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-04-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity:65.0%
 Test Distance:8.000m [K=0.7125]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:221.9V I:0.1347A P:29.084W PF:0.9728 Freq:50.00Hz Lamp Flux:2641.55x1 lm										
Name: PU-TL-30-930-38D					Type: LED					
MFR.:										
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	18.9	19.8	19.1	19.9	20.1	19.6	20.5	19.9	20.7	20.9
3H	19.8	20.7	20.1	20.9	21.1	20.5	21.3	20.7	21.5	21.7
4H	20.5	21.2	20.7	21.5	21.7	21.1	21.9	21.4	22.1	22.3
6H	21.0	21.7	21.3	22.0	22.3	21.7	22.4	22.0	22.7	23.0
8H	21.2	21.9	21.5	22.1	22.4	21.9	22.6	22.3	22.9	23.2
12H	21.2	21.9	21.6	22.2	22.5	22.1	22.8	22.4	23.1	23.4
4H 2H	19.1	19.9	19.4	20.2	20.4	19.8	20.6	20.1	20.8	21.1
3H	20.4	21.1	20.7	21.4	21.7	20.9	21.6	21.3	21.9	22.2
4H	21.2	21.8	21.6	22.2	22.5	21.7	22.4	22.1	22.7	23.0
6H	21.9	22.5	22.3	22.9	23.2	22.6	23.1	23.0	23.5	23.8
8H	22.2	22.7	22.6	23.0	23.4	22.9	23.4	23.3	23.8	24.1
12H	22.3	22.8	22.7	23.2	23.6	23.1	23.6	23.5	24.0	24.4
8H 4H	21.6	22.1	22.0	22.5	22.8	22.0	22.5	22.4	22.9	23.3
6H	22.5	22.9	22.9	23.3	23.7	23.0	23.5	23.5	23.9	24.3
8H	22.8	23.1	23.2	23.6	24.0	23.4	23.8	23.9	24.2	24.7
12H	23.0	23.3	23.4	23.7	24.2	23.7	24.0	24.2	24.5	25.0
12H 4H	21.6	22.1	22.0	22.5	22.9	22.0	22.5	22.5	22.9	23.3
6H	22.5	22.9	23.0	23.4	23.8	23.1	23.5	23.6	23.9	24.4
8H	22.9	23.2	23.4	23.7	24.2	23.5	23.8	24.0	24.3	24.8
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 0.3 / - 0.3					+ 0.9 / - 0.5				
1.5H	+ 0.6 / - 0.2					+ 1.9 / - 0.4				
2.0H	+ 0.1 / - 0.2					+ 0.1 / - 0.1				

CIE Pub.117, 2642 lm Total Lamp Luminous Flux Corrected ($8\log(F/F_0) = 3.4$)
Area: 0.0056 m2

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-04-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7125]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:221.9V I:0.1347A P:29.084W PF:0.9728 Freq:50.00Hz		
Lamp Flux:2641.55x1 lm		
Name: PU-TL-30-930-38D	Type: LED	
MFR.:		


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	86	79	75	85	79	75	84	79	75	71
0.80	93	87	83	92	87	83	91	86	82	79
1.00	97	91	88	97	91	87	95	91	87	83
1.25	101	96	92	100	95	92	98	94	91	86
1.50	104	99	95	103	98	95	101	97	94	89
2.00	107	103	99	106	101	98	103	99	97	91
2.50	109	105	102	107	103	101	104	101	99	92
3.00	111	107	104	109	105	103	105	103	100	94
4.00	113	110	107	111	108	106	107	105	103	96
5.00	114	112	110	112	110	108	108	106	105	97
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-04-09

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7125]
Remarks:

ISOCANDELA DIAGRAM

Test:U:221.9V I:0.1347A P:29.084W PF:0.9728 Freq:50.00Hz Lamp Flux:2641.55x1 lm		
Name: PU-TL-30-930-38D	Type: LED	
MFR.:		

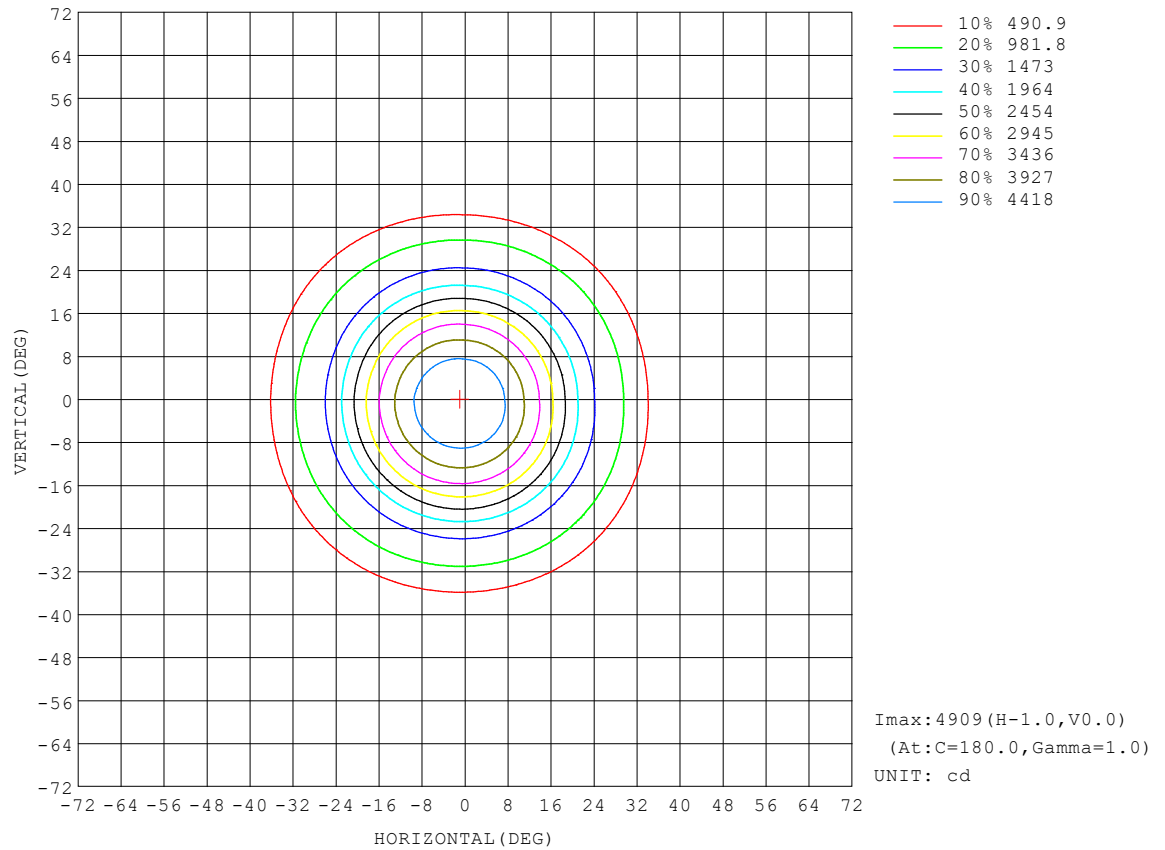


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-04-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7125]
Remarks:

AAI Figure

Test:U:221.9V I:0.1347A P:29.084W PF:0.9728 Freq:50.00Hz Lamp Flux:2641.55x1 lm		
Name: PU-TL-30-930-38D	Type: LED	
MFR.:		

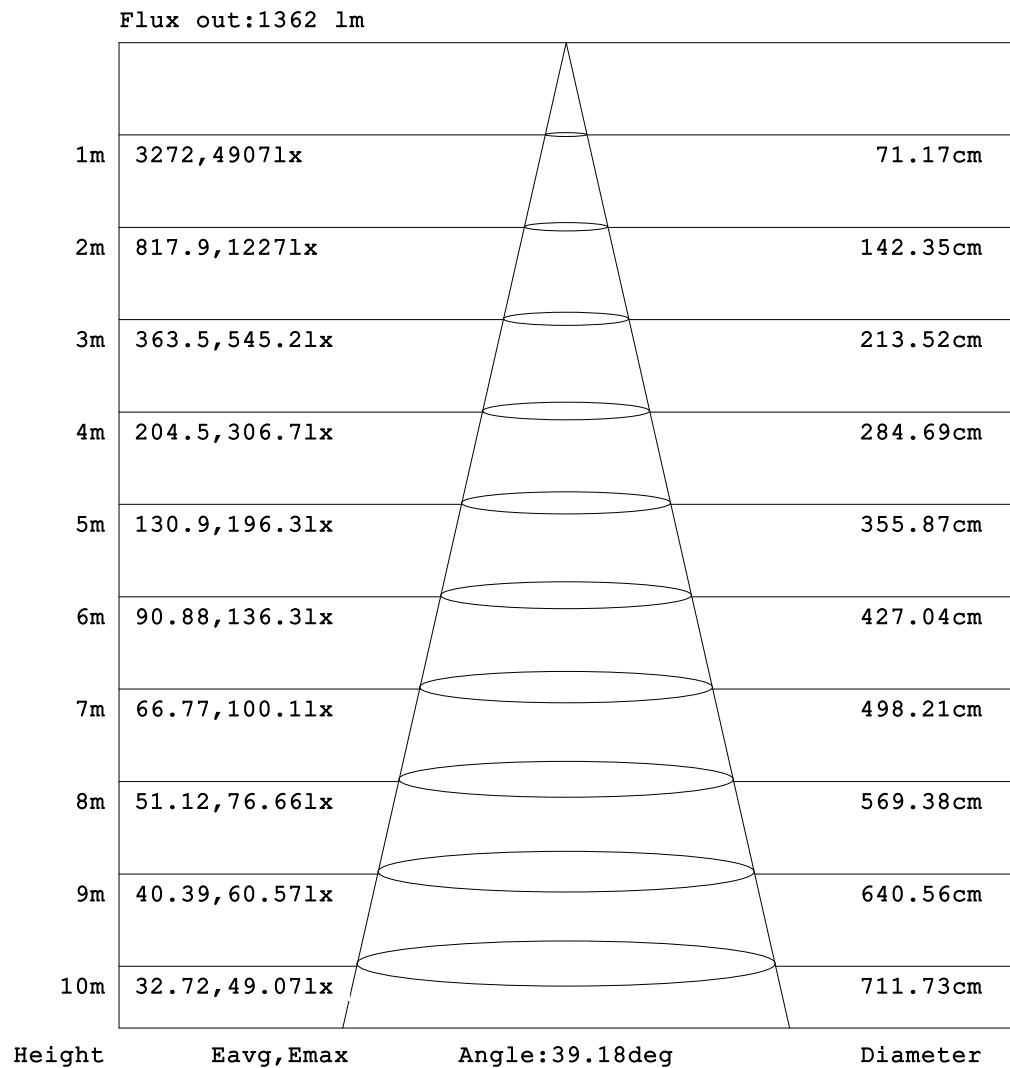


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-04-09

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7125]
Remarks:

ISOLUX DIAGRAM


Test:U:221.9V I:0.1347A P:29.084W PF:0.9728 Freq:50.00Hz Lamp Flux:2641.55x1 lm		
Name: PU-TL-30-930-38D	Type: LED	
MFR.:		

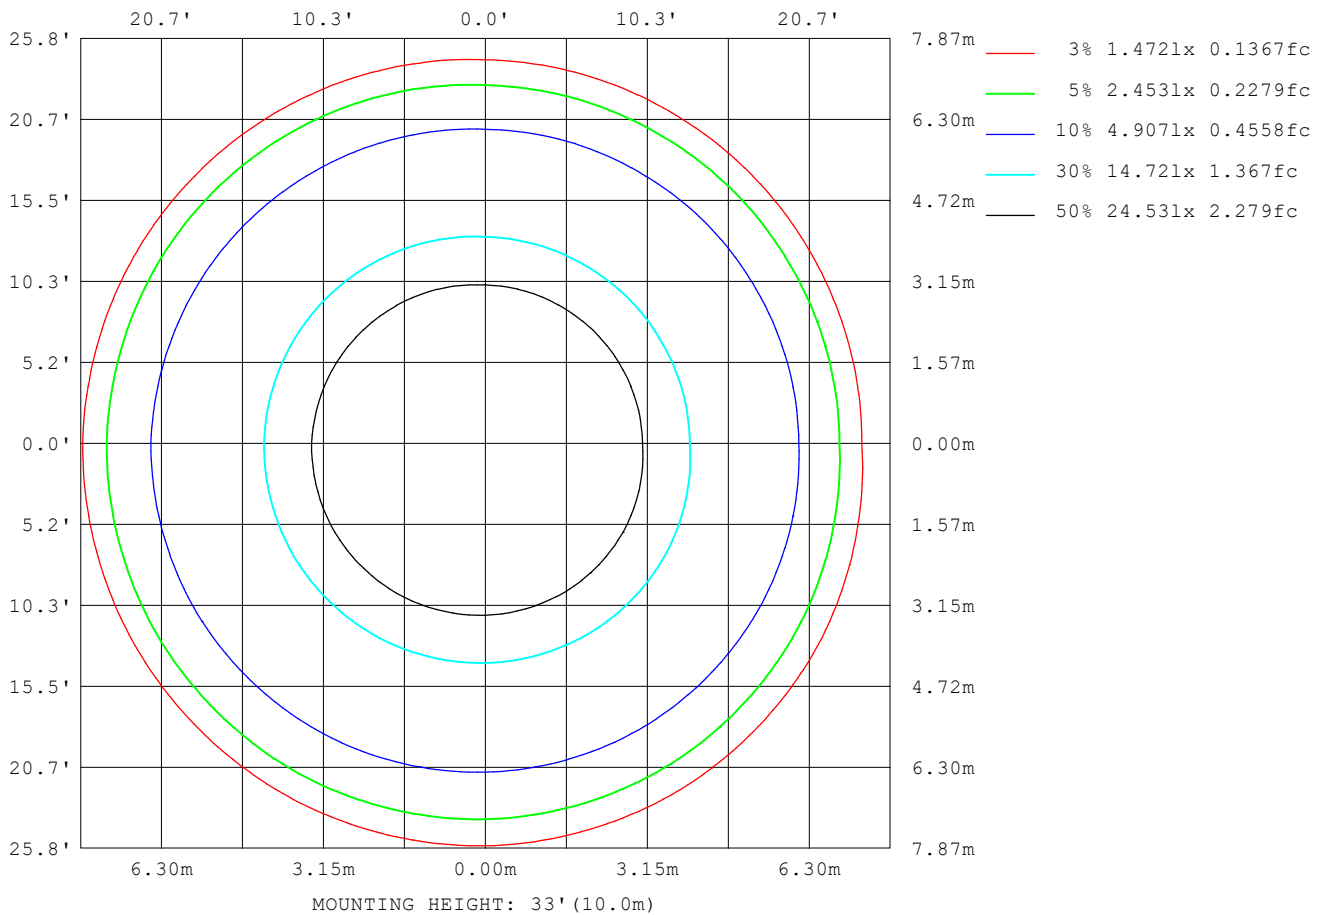

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-04-09

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7125]
Remarks:

Planar Illuminance Curve

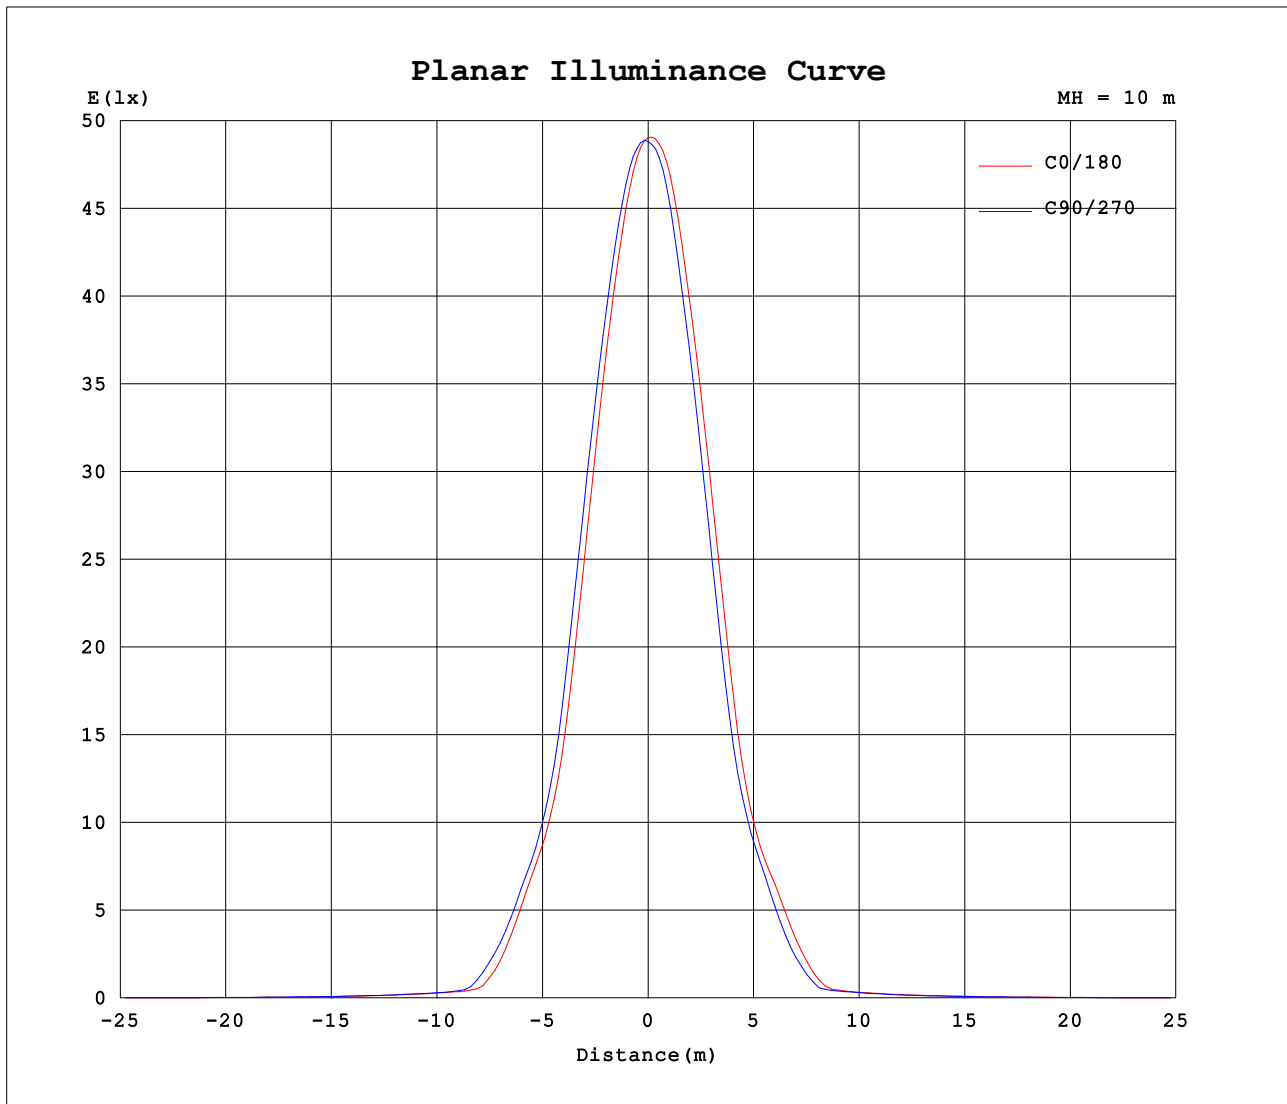

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2024-04-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7125]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:221.9V I:0.1347A P:29.084W PF:0.9728 Freq:50.00Hz Lamp Flux:2641.55x1 lm		
Name: PU-TL-30-930-38D	Type: LED	
MFR.:		

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	4905	4893	4885	4883	4890	4898	4905	4898	4890	4883	4885	4893						
5	4662	4710	4750	4781	4809	4825	4823	4782	4731	4683	4663	4656						
10	4069	4168	4246	4304	4349	4368	4354	4265	4162	4067	4035	4036						
15	3213	3361	3476	3559	3616	3636	3613	3495	3357	3231	3185	3179						
20	2159	2328	2459	2551	2611	2628	2598	2470	2323	2187	2135	2126						
25	1370	1467	1541	1592	1621	1627	1609	1547	1474	1406	1376	1364						
30	937	1000	1048	1083	1108	1116	1106	1054	994	939	920	920						
35	391	470	532	577	611	625	616	560	492	427	398	386						
40	103	121	136	147	156	160	158	144	127	111	104	101						
45	84.1	85.8	87.7	89.8	93.0	95.7	97.4	95.6	92.8	89.6	87.5	85.7						
50	70.6	72.1	73.6	75.2	77.2	78.8	79.7	78.2	76.1	73.7	72.4	71.3						
55	60.2	61.2	62.2	63.3	64.6	65.7	66.3	65.3	63.9	62.4	61.5	60.7						
60	51.9	52.7	53.4	54.1	55.1	55.9	56.3	55.7	54.7	53.7	53.0	52.4						
65	44.7	45.5	46.3	47.0	47.8	48.5	48.9	48.5	47.9	47.0	46.3	45.5						
70	38.8	39.5	40.3	41.1	42.1	42.9	43.4	43.1	42.6	41.7	40.9	39.9						
75	31.5	32.7	33.8	34.8	36.1	37.1	37.7	37.1	36.2	35.0	33.9	32.7						
80	19.7	22.1	24.1	25.9	27.7	28.9	29.3	28.0	26.1	24.0	22.5	21.0						
85	7.91	9.25	10.6	12.0	13.8	15.4	16.3	15.5	14.0	12.2	10.8	9.38						
90	0.69	0.57	0.87	1.59	3.18	4.85	6.26	6.55	6.28	5.52	4.36	2.76						
95	0.95	0.34	0.30	0.84	2.45	4.27	5.92	6.55	6.62	6.11	4.99	3.27						
100	1.32	0.66	0.61	1.16	2.84	4.73	6.44	7.07	7.12	6.58	5.43	3.67						
105	1.72	1.06	1.00	1.56	3.26	5.17	6.91	7.56	7.62	7.09	5.92	4.13						
110	2.10	1.43	1.38	1.96	3.69	5.64	7.40	8.05	8.10	7.54	6.34	4.53						
115	2.41	1.76	1.72	2.30	4.03	5.98	7.73	8.34	8.35	7.76	6.57	4.79						
120	2.65	2.03	2.00	2.57	4.25	6.13	7.81	8.36	8.33	7.73	6.59	4.90						
125	2.78	2.22	2.21	2.75	4.32	6.07	7.63	8.10	8.02	7.43	6.37	4.82						
130	2.81	2.33	2.33	2.81	4.23	5.79	7.17	7.55	7.43	6.87	5.93	4.58						
135	2.75	2.36	2.37	2.79	4.00	5.34	6.51	6.79	6.65	6.14	5.34	4.22						
140	2.66	2.35	2.36	2.70	3.69	4.77	5.70	5.88	5.73	5.28	4.65	3.78						
145	2.62	2.38	2.39	2.63	3.35	4.13	4.81	4.90	4.76	4.42	3.97	3.37						
150	2.56	2.42	2.43	2.59	3.06	3.56	4.00	4.05	3.95	3.73	3.44	3.05						
155	2.46	2.38	2.41	2.52	2.83	3.16	3.44	3.47	3.40	3.24	3.05	2.78						
160	2.32	2.29	2.32	2.39	2.58	2.78	2.94	2.93	2.86	2.75	2.64	2.49						
165	2.20	2.20	2.22	2.26	2.33	2.41	2.46	2.46	2.43	2.38	2.33	2.27						
170	2.07	2.08	2.10	2.12	2.16	2.19	2.22	2.20	2.18	2.15	2.12	2.09						
175	1.98	1.99	2.00	2.01	2.04	2.06	2.08	2.07	2.05	2.02	2.01	1.99						
180	2.01	2.01	2.01	2.01	2.02	2.02	2.03	2.02	2.01	2.01	2.01	2.01						

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-04-09

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7125]
Remarks: