


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:220.1V I:0.1609A P:28.614W PF:0.8081 Freq:49.99Hz Lamp Flux:1897.45x1 lm		
Name: 30W track light zoom-38D	Type: LED	
MFR.:		

DATA OF LAMP		PHOTOMETRIC DATA Eff: 66.31 lm/W			
MODEL		I _{max} (cd)	3964	S/MH(C0/180)	0.59
NOMINAL POWER(W)	30	LOR(%)	100.0	S/MH(C90/270)	0.57
RATED VOLTAGE(V)	220	TOTAL FLUX(lm)	1897.4	η UP,DN(C0-180)	0.3,54.3
NOMINAL FLUX(lm)	1897.45	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.7,44.7
LAMPS INSIDE	1	η up(%)	1.0	CIBSE SHR NOM	0.50
TEST VOLTAGE(V)	220	η down(%)	99.0	CIBSE SHR MAX	0.60

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

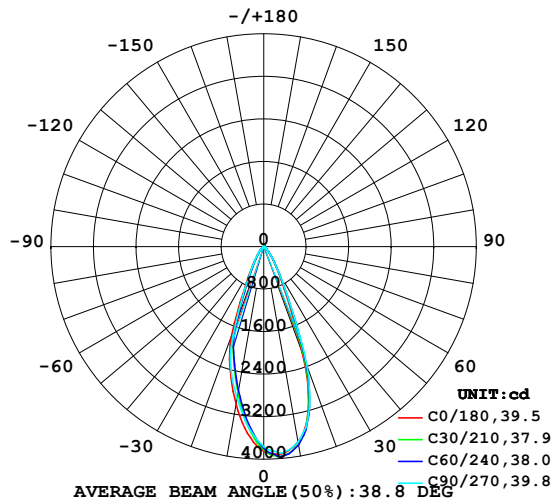

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

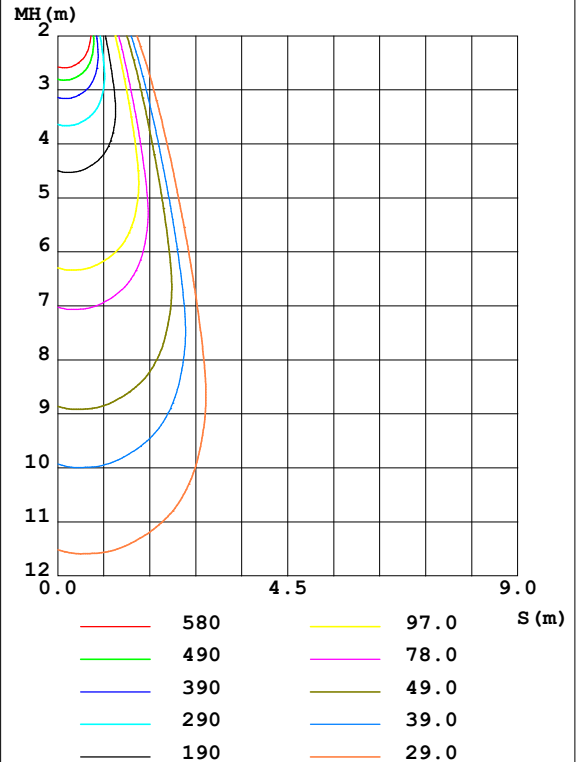

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-10-10

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7125]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	3724	3780	3732	3356	3009	2772	2904	3467	0- 10	339.1	339.1	17.9,17.9
20	2122	2283	2363	2074	1767	1506	1564	1924	10- 20	764.8	1104	58.2,58.2
30	543.1	581.9	590.4	514.1	437.9	388.5	416.1	509.8	20- 30	463.5	1567	82.6,82.6
40	182.1	192.6	192.8	170.8	148.9	133.4	144.6	172.3	30- 40	184.5	1752	92.3,92.3
50	49.05	51.96	53.61	53.17	49.83	44.97	45.12	48.60	40- 50	75.00	1827	96.3,96.3
60	16.63	17.19	18.51	19.25	20.45	19.82	19.02	18.45	50- 60	26.82	1854	97.7,97.7
70	7.242	7.508	8.129	8.831	10.57	10.40	9.988	9.304	60- 70	13.21	1867	98.4,98.4
80	4.109	4.155	4.422	5.232	8.037	8.203	7.966	7.104	70- 80	7.412	1874	98.8,98.8
90	0.2213	0.2630	0.3098	0.7961	3.974	4.132	4.052	3.662	80- 90	4.013	1878	99,99
100	0.6410	0.5748	0.6118	1.219	4.632	4.797	4.767	4.414	90-100	2.637	1881	99.1,99.1
110	1.355	1.289	1.365	2.048	5.628	5.850	5.814	5.385	100-110	3.343	1884	99.3,99.3
120	1.964	1.971	1.996	2.529	5.807	5.998	5.902	5.561	110-120	3.823	1888	99.5,99.5
130	2.273	2.305	2.297	2.629	5.057	5.047	5.033	4.992	120-130	3.500	1892	99.7,99.7
140	2.097	2.121	2.138	2.348	3.860	3.724	3.754	3.896	130-140	2.631	1894	99.8,99.8
150	1.860	1.859	1.881	1.977	2.634	2.553	2.562	2.578	140-150	1.635	1896	99.9,99.9
160	1.708	1.725	1.744	1.747	2.001	1.974	1.975	1.934	150-160	0.9503	1897	100,100
170	1.441	1.464	1.439	1.425	1.505	1.457	1.406	1.438	160-170	0.4722	1897	100,100
180	1.298	1.291	1.228	1.263	1.298	1.290	1.227	1.259	170-180	0.1290	1897	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 1799 lm

%lum = 94.8%

%lamp = 94.8%

Conical surface Flux(120deg): 1853.7 lm

%lum = 97.7%


%lamp = 97.7%

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-10-10

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity:65.0%
 Test Distance:8.000m [K=0.7125]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:220.1V I:0.1609A P:28.614W PF:0.8081 Freq:49.99Hz Lamp Flux:1897.45x1 lm		
Name: 30W track light zoom-38D	Type: LED	
MFR.:		

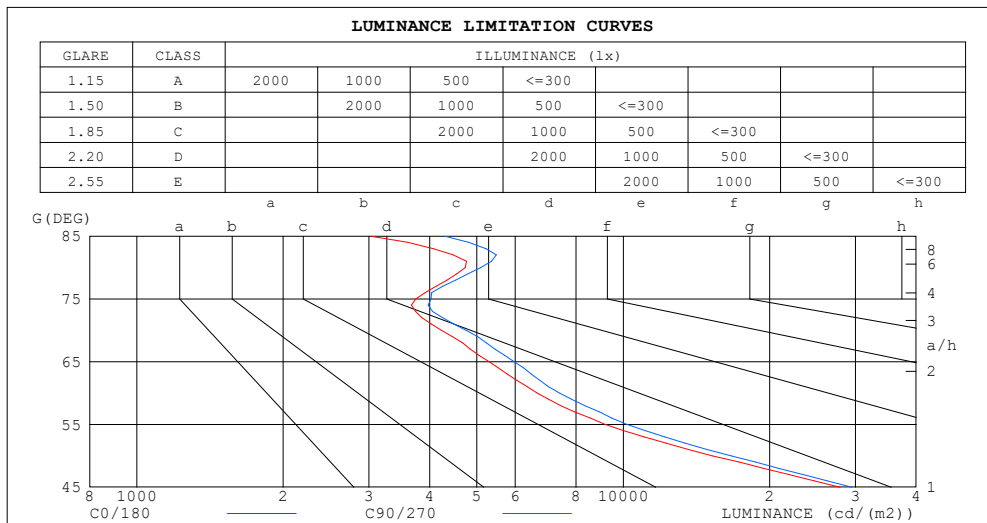

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	3034	4303
80	4732	5093
75	3743	4025
70	4235	4754
65	5303	5966
60	6654	7406
55	9193	10187
50	15260	16681
45	27908	29527


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-10-10

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7125]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:220.1V I:0.1609A P:28.614W PF:0.8081 Freq:49.99Hz		
Lamp Flux:1897.45x1 lm		
Name: 30W track light zoom-38D	Type: LED	
MFR.:		

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.01	1.01	1.01	.99
1.0	1.11	1.09	1.07	1.09	1.07	1.05	1.05	1.03	1.02	1.01	.99	.98	.97	.96	.95	.93
2.0	1.04	1.01	.97	1.02	.99	.96	.99	.96	.94	.96	.94	.92	.93	.91	.90	.88
3.0	.98	.94	.90	.97	.93	.89	.94	.91	.88	.92	.89	.86	.89	.87	.85	.83
4.0	.93	.88	.84	.92	.87	.84	.89	.86	.83	.87	.84	.81	.85	.83	.80	.79
5.0	.88	.83	.79	.87	.82	.79	.85	.81	.78	.84	.80	.77	.82	.79	.76	.75
6.0	.84	.78	.75	.83	.78	.74	.81	.77	.74	.80	.76	.73	.79	.75	.73	.71
7.0	.80	.74	.71	.79	.74	.71	.78	.73	.70	.77	.73	.70	.75	.72	.69	.68
8.0	.76	.71	.67	.76	.71	.67	.74	.70	.67	.73	.69	.66	.72	.69	.66	.65
9.0	.73	.68	.64	.72	.67	.64	.71	.67	.64	.70	.66	.63	.70	.66	.63	.62
10.0	.70	.65	.61	.69	.64	.61	.68	.64	.61	.68	.64	.61	.67	.63	.61	.59

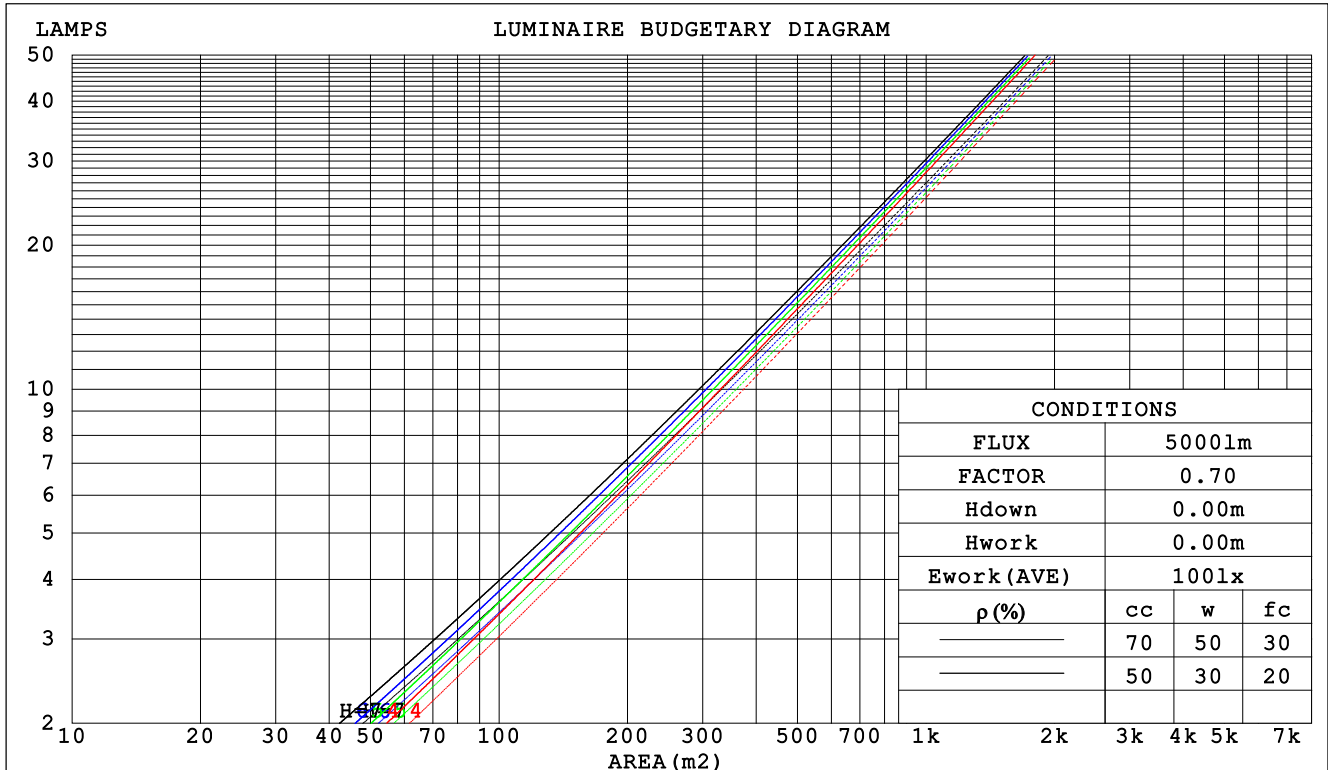

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-10-10

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7125]
Remarks:

WEC AND CCEC

Test:U:220.1V I:0.1609A P:28.614W PF:0.8081 Freq:49.99Hz		
Lamp Flux:1897.45x1 lm		
Name: 30W track light zoom-38D	Type: LED	
MFR.:		

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients (WEC)										
0.0																	
1.0	.167	.095	.030	.160	.091	.029	.146	.084	.027	.134	.078	.025	.123	.071	.023		
2.0	.157	.086	.026	.151	.083	.026	.140	.078	.024	.130	.073	.023	.120	.068	.021		
3.0	.147	.078	.024	.143	.076	.023	.133	.072	.022	.124	.068	.021	.116	.064	.020		
4.0	.139	.072	.021	.135	.071	.021	.127	.067	.020	.119	.064	.019	.112	.061	.019		
5.0	.132	.067	.019	.128	.066	.019	.121	.063	.019	.115	.061	.018	.109	.058	.017		
6.0	.125	.063	.018	.122	.062	.018	.116	.059	.017	.110	.057	.017	.105	.055	.016		
7.0	.119	.059	.017	.116	.058	.017	.111	.056	.016	.106	.054	.016	.101	.053	.015		
8.0	.114	.056	.016	.111	.055	.015	.107	.053	.015	.102	.052	.015	.098	.050	.015		
9.0	.109	.053	.015	.107	.052	.015	.102	.051	.014	.098	.049	.014	.094	.048	.014		
10.0	.104	.050	.014	.102	.049	.014	.098	.048	.014	.095	.047	.013	.091	.046	.013		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.198	.198	.198	.169	.169	.169	.116	.116	.116	.066	.066	.066	.021	.021	.021	
1.0	.178	.165	.153	.152	.142	.132	.104	.098	.091	.060	.056	.053	.019	.018	.017	
2.0	.162	.140	.122	.139	.121	.106	.095	.084	.074	.055	.049	.043	.018	.016	.014	
3.0	.149	.121	.099	.127	.105	.086	.088	.073	.060	.051	.042	.036	.016	.014	.012	
4.0	.138	.106	.083	.118	.092	.072	.081	.064	.051	.047	.038	.030	.015	.012	.010	
5.0	.128	.095	.070	.110	.082	.061	.076	.057	.043	.044	.034	.025	.014	.011	.008	
6.0	.120	.085	.060	.103	.074	.052	.071	.052	.037	.041	.030	.022	.013	.010	.007	
7.0	.113	.077	.052	.097	.067	.045	.067	.047	.032	.039	.028	.019	.013	.009	.006	
8.0	.107	.071	.046	.092	.061	.040	.064	.043	.028	.037	.025	.017	.012	.008	.006	
9.0	.102	.065	.041	.088	.057	.036	.061	.040	.025	.035	.024	.015	.011	.008	.005	
10.0	.097	.061	.037	.084	.053	.032	.058	.037	.023	.034	.022	.014	.011	.007	.005	

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-10-10

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity:65.0%
 Test Distance:8.000m [K=0.7125]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:220.1V I:0.1609A P:28.614W PF:0.8081 Freq:49.99Hz Lamp Flux:1897.45x1 lm										
Name: 30W track light zoom-38D					Type: LED					
MFR.:										
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	17.6	18.4	17.8	18.6	18.8	17.9	18.7	18.1	18.9	19.1
3H	17.6	18.3	17.8	18.5	18.8	17.9	18.6	18.1	18.8	19.1
4H	17.5	18.3	17.8	18.5	18.7	17.8	18.6	18.1	18.8	19.0
6H	17.5	18.2	17.8	18.5	18.7	17.8	18.5	18.1	18.8	19.0
8H	17.5	18.2	17.8	18.4	18.7	17.8	18.5	18.1	18.8	19.0
12H	17.5	18.1	17.8	18.4	18.7	17.8	18.4	18.1	18.7	19.0
4H 2H	17.4	18.2	17.7	18.4	18.6	17.7	18.5	18.0	18.7	18.9
3H	17.4	18.1	17.8	18.4	18.6	17.7	18.4	18.1	18.6	18.9
4H	17.4	18.0	17.8	18.3	18.6	17.7	18.3	18.1	18.6	18.9
6H	17.5	18.0	17.9	18.3	18.7	17.8	18.3	18.1	18.6	19.0
8H	17.5	18.0	17.9	18.3	18.7	17.8	18.3	18.2	18.6	19.0
12H	17.5	17.9	17.9	18.3	18.7	17.8	18.2	18.2	18.6	19.0
8H 4H	17.3	17.8	17.7	18.2	18.6	17.6	18.1	18.0	18.5	18.8
6H	17.4	17.8	17.9	18.2	18.7	17.7	18.1	18.2	18.5	18.9
8H	17.5	17.8	17.9	18.3	18.7	17.8	18.1	18.2	18.6	19.0
12H	17.5	17.8	18.0	18.2	18.7	17.8	18.1	18.3	18.6	19.1
12H 4H	17.3	17.7	17.7	18.1	18.5	17.6	18.0	18.0	18.4	18.8
6H	17.4	17.7	17.9	18.2	18.6	17.7	18.0	18.1	18.5	18.9
8H	17.5	17.8	17.9	18.2	18.7	17.8	18.1	18.3	18.5	19.0
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 2.1 / - 4.2					+ 2.2 / - 4.0				
1.5H	+ 3.6 / - 3.7					+ 3.7 / - 3.7				
2.0H	+ 4.0 / - 2.3					+ 4.1 / - 2.3				

CIE Pub.117, 1897 lm Total Lamp Luminous Flux Corrected ($8\log(F/F_0) = 2.2$)
Area: 0.005 m²

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-10-10

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7125]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:220.1V I:0.1609A P:28.614W PF:0.8081 Freq:49.99Hz Lamp Flux:1897.45x1 lm		
Name: 30W track light zoom-38D	Type: LED	
MFR.:		


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	87	80	77	86	80	76	85	80	76	73
0.80	94	88	84	93	88	84	92	87	84	80
1.00	99	93	89	98	92	89	96	92	88	84
1.25	103	97	94	101	97	93	99	95	93	88
1.50	105	100	97	104	100	97	102	98	95	91
2.00	108	104	101	107	103	100	104	101	98	93
2.50	110	106	103	108	105	102	105	102	100	94
3.00	111	108	105	109	106	104	106	104	102	95
4.00	113	111	108	111	109	107	107	106	104	97
5.00	115	112	110	112	110	109	108	107	105	98
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-10-10

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7125]
Remarks:

ISOCANDELA DIAGRAM

Test:U:220.1V I:0.1609A P:28.614W PF:0.8081 Freq:49.99Hz Lamp Flux:1897.45x1 lm		
Name: 30W track light zoom-38D	Type: LED	
MFR.:		

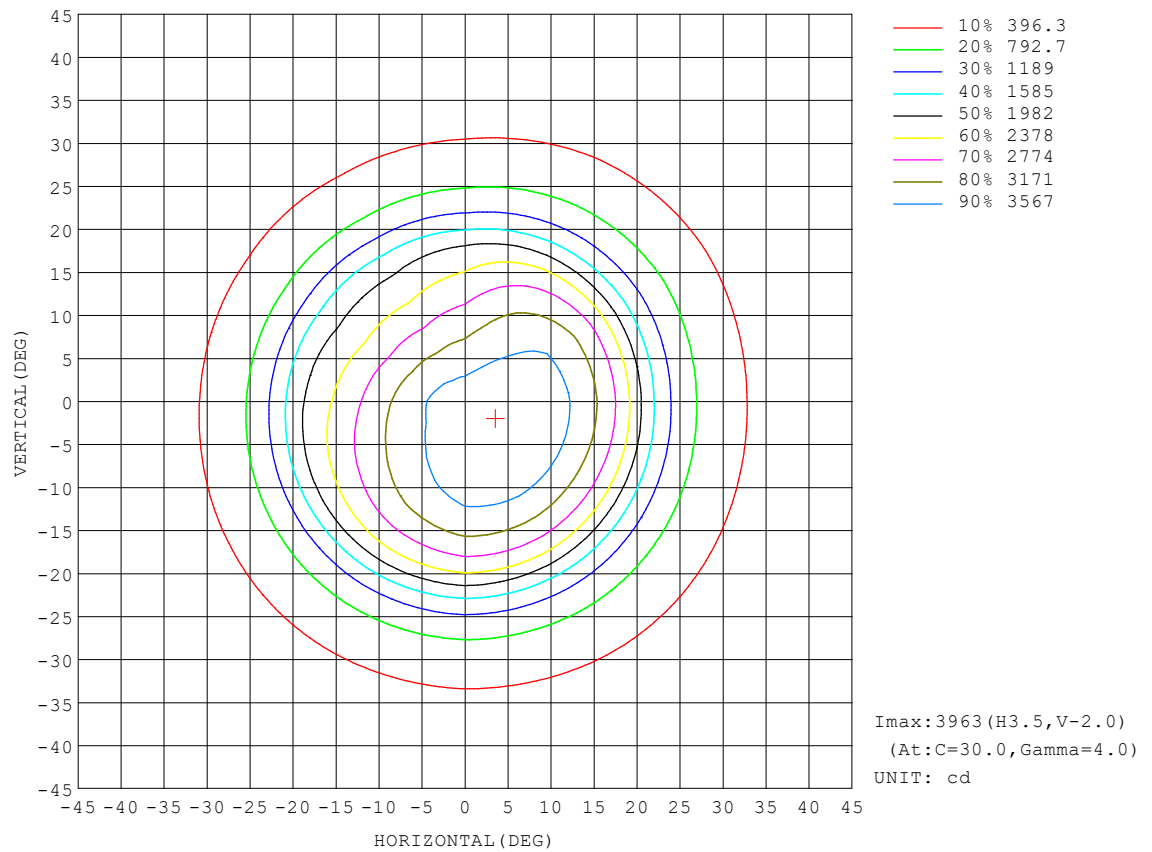


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-10-10

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7125]
Remarks:

AAI Figure

Test:U:220.1V I:0.1609A P:28.614W PF:0.8081 Freq:49.99Hz Lamp Flux:1897.45x1 lm		
Name: 30W track light zoom-38D	Type: LED	
MFR.:		

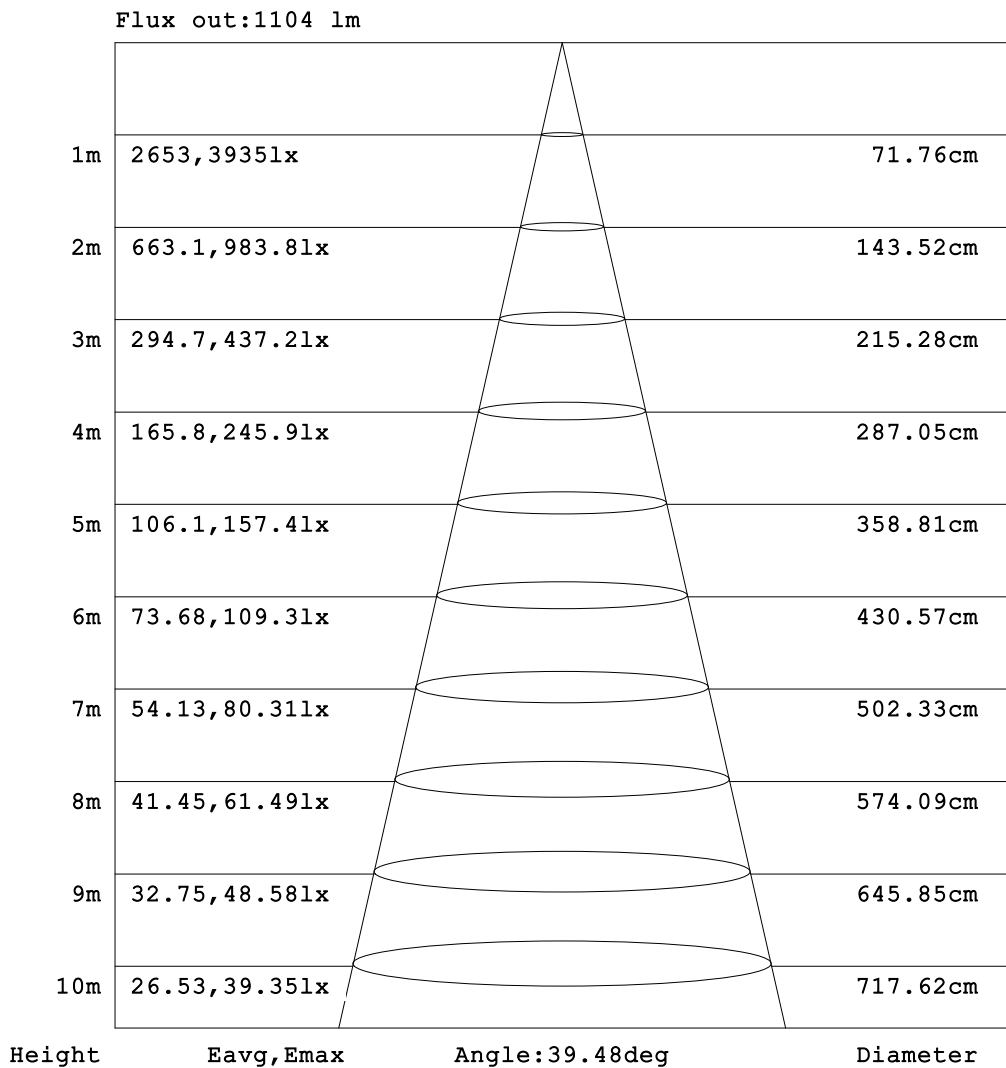


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-10-10

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7125]
Remarks:

ISOLUX DIAGRAM


Test:U:220.1V I:0.1609A P:28.614W PF:0.8081 Freq:49.99Hz Lamp Flux:1897.45x1 lm		
Name: 30W track light zoom-38D	Type: LED	
MFR.:		

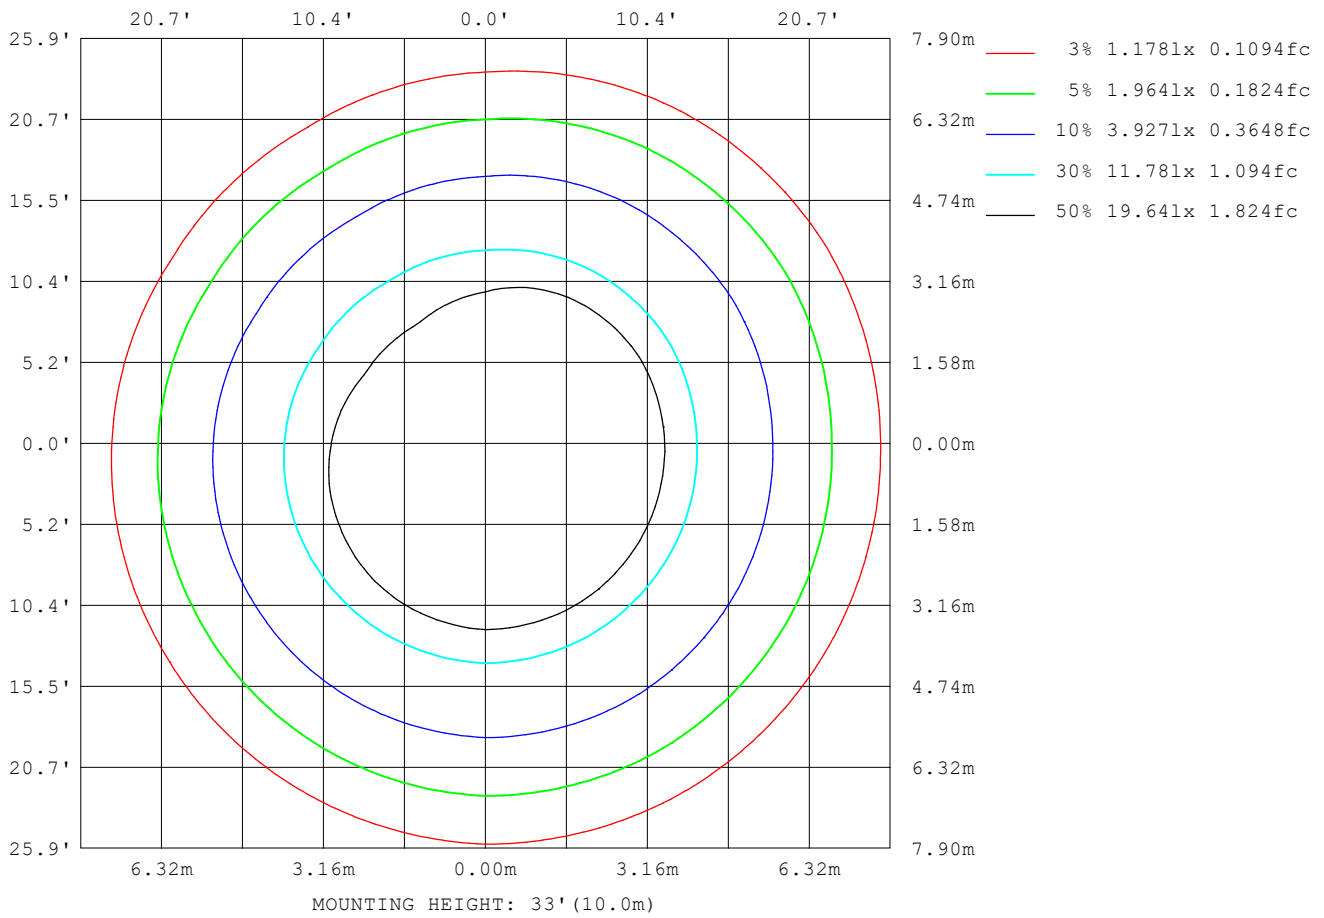

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-10-10

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7125]
Remarks:

Planar Illuminance Curve

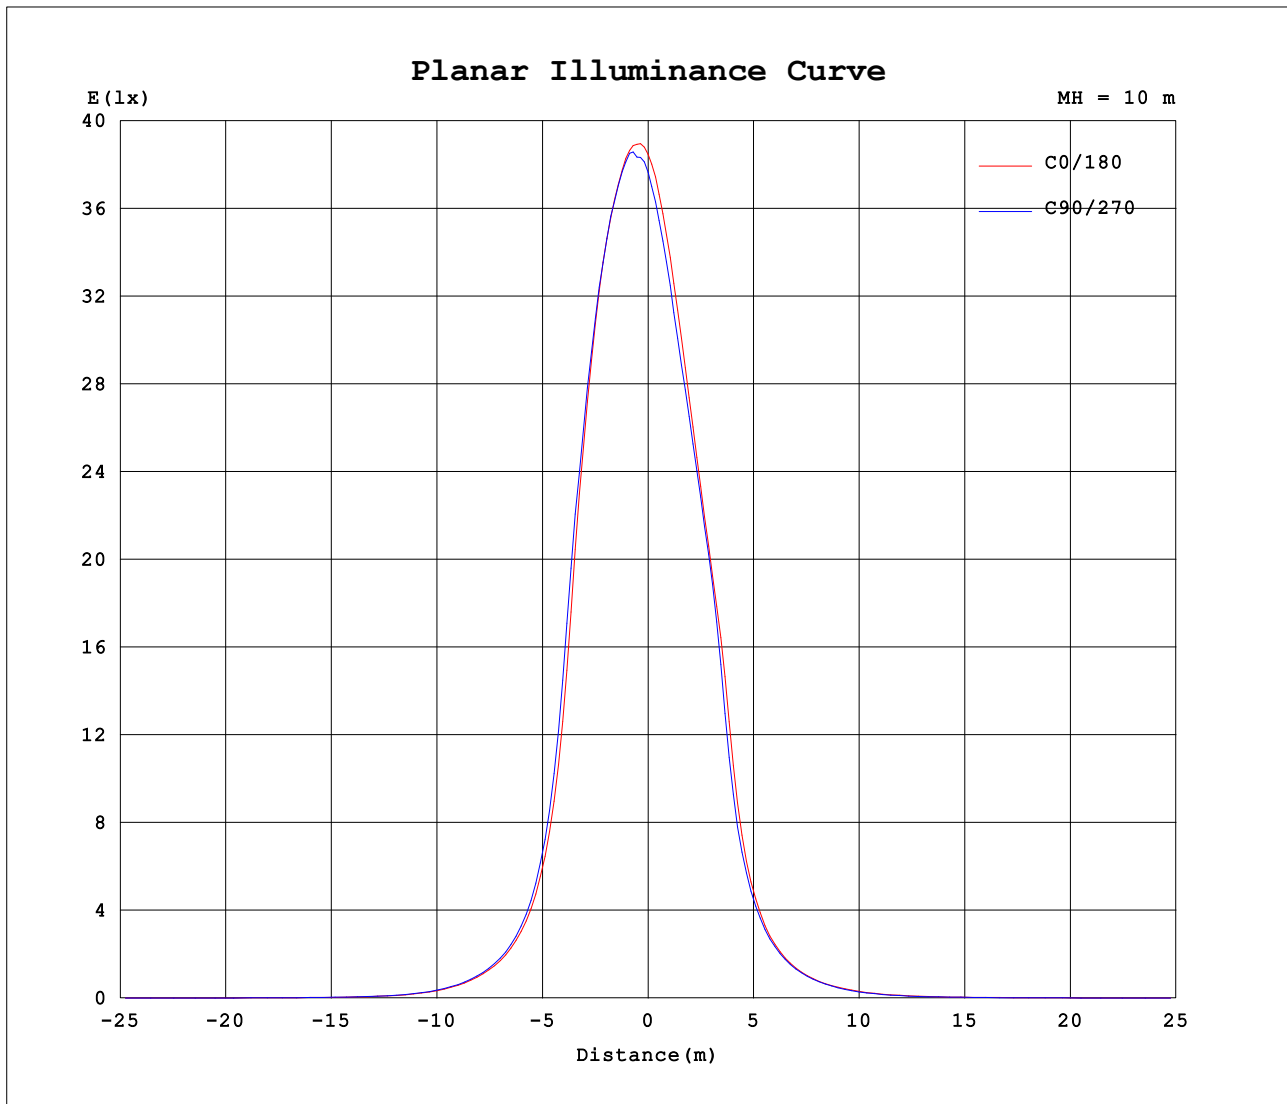

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2024-10-10

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity: 65.0%
 Test Distance: 8.000m [K=0.7125]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.1V I:0.1609A P:28.614W PF:0.8081 Freq:49.99Hz Lamp Flux:1897.45x1 lm		
Name: 30W track light zoom-38D	Type: LED	
MFR.:		

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	3846	3823	3795	3764	3727	3762	3846	3830	3795	3764	3727	3746						
5	3909	3960	3960	3897	3711	3580	3522	3395	3338	3395	3560	3742						
10	3724	3773	3787	3732	3486	3225	3009	2798	2745	2904	3310	3624						
15	3228	3242	3277	3269	3020	2714	2435	2200	2172	2387	2814	3134						
20	2122	2235	2331	2363	2182	1965	1767	1547	1465	1564	1819	2030						
25	1022	1082	1133	1151	1062	946	839	742	714	768	902	1001						
30	543	573	591	590	542	486	438	393	384	416	485	534						
35	313	326	334	333	305	275	250	225	221	243	280	307						
40	182	191	195	193	179	163	149	134	132	145	165	179						
45	98.7	102	104	104	101	95.1	87.5	79.5	77.4	82.3	91.7	98.1						
50	49.0	51.2	52.7	53.6	53.8	52.5	49.8	45.9	44.1	45.1	47.8	49.4						
55	26.4	27.0	28.0	29.2	29.7	29.9	29.8	28.4	27.6	27.5	27.7	27.4						
60	16.6	16.8	17.5	18.5	18.9	19.6	20.5	20.1	19.5	19.0	18.8	18.1						
65	11.2	11.5	12.0	12.6	13.1	14.0	15.1	14.7	14.1	13.7	13.4	12.7						
70	7.24	7.35	7.67	8.13	8.38	9.29	10.6	10.5	10.3	9.99	9.73	8.88						
75	4.84	4.80	4.93	5.21	5.39	6.55	8.31	8.55	8.46	8.30	7.96	6.88						
80	4.11	4.10	4.21	4.42	4.55	5.91	8.04	8.28	8.13	7.97	7.70	6.51						
85	1.32	1.52	1.71	1.88	1.74	2.99	5.14	5.14	4.83	4.72	4.80	3.82						
90	0.22	0.25	0.28	0.31	0.10	1.49	3.97	4.20	4.06	4.05	4.21	3.11						
95	0.37	0.33	0.33	0.36	0.17	1.67	4.29	4.53	4.38	4.39	4.61	3.46						
100	0.64	0.58	0.57	0.61	0.45	1.99	4.63	4.87	4.73	4.77	5.00	3.82						
105	1.00	0.92	0.92	0.98	0.85	2.42	5.10	5.37	5.25	5.30	5.54	4.30						
110	1.36	1.29	1.29	1.37	1.24	2.86	5.63	5.91	5.79	5.81	6.03	4.74						
115	1.68	1.64	1.65	1.70	1.55	3.14	5.88	6.16	6.02	6.01	6.21	4.96						
120	1.96	1.97	1.98	2.00	1.80	3.26	5.81	6.07	5.92	5.90	6.12	5.00						
125	2.17	2.20	2.21	2.20	1.99	3.26	5.52	5.71	5.55	5.56	5.83	4.88						
130	2.27	2.30	2.31	2.30	2.10	3.16	5.06	5.13	4.97	5.03	5.37	4.62						
135	2.24	2.26	2.28	2.28	2.11	2.96	4.49	4.46	4.30	4.41	4.80	4.23						
140	2.10	2.11	2.13	2.14	2.01	2.68	3.86	3.80	3.65	3.75	4.11	3.68						
145	1.94	1.94	1.96	1.97	1.89	2.37	3.20	3.13	3.01	3.08	3.31	3.02						
150	1.86	1.85	1.86	1.88	1.83	2.12	2.63	2.59	2.52	2.56	2.67	2.48						
155	1.81	1.80	1.82	1.84	1.80	1.97	2.29	2.26	2.22	2.26	2.28	2.15						
160	1.71	1.72	1.73	1.74	1.70	1.80	2.00	1.99	1.96	1.98	1.97	1.89						
165	1.58	1.60	1.61	1.61	1.57	1.61	1.72	1.71	1.69	1.69	1.68	1.65						
170	1.44	1.47	1.46	1.44	1.41	1.44	1.50	1.48	1.43	1.41	1.43	1.45						
175	1.32	1.34	1.31	1.28	1.27	1.30	1.34	1.34	1.30	1.25	1.27	1.30						
180	1.30	1.31	1.27	1.23	1.25	1.28	1.30	1.31	1.27	1.23	1.24	1.27						

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-10-10

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7125]
Remarks: