


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:230.2V I:0.0657A P:10.964W PF:0.7248 Freq:49.99Hz Lamp Flux:1255.47x1 lm		
Name: P5-930-10W	Type: LED	
MFR.:		

DATA OF LAMP		PHOTOMETRIC DATA Eff: 114.51 lm/W			
MODEL		I _{max} (cd)	2686	S/MH (C0/180)	0.57
NOMINAL POWER (W)	10	LOR (%)	100.0	S/MH (C90/270)	0.57
RATED VOLTAGE (V)	230	TOTAL FLUX (lm)	1255.5	η UP, DN (C0-180)	0.5, 49.5
NOMINAL FLUX (lm)	1255.47	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.5, 49.5
LAMPS INSIDE	1	η up (%)	0.9	CIBSE SHR NOM	0.50
TEST VOLTAGE (V)	230	η down (%)	99.1	CIBSE SHR MAX	0.55

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

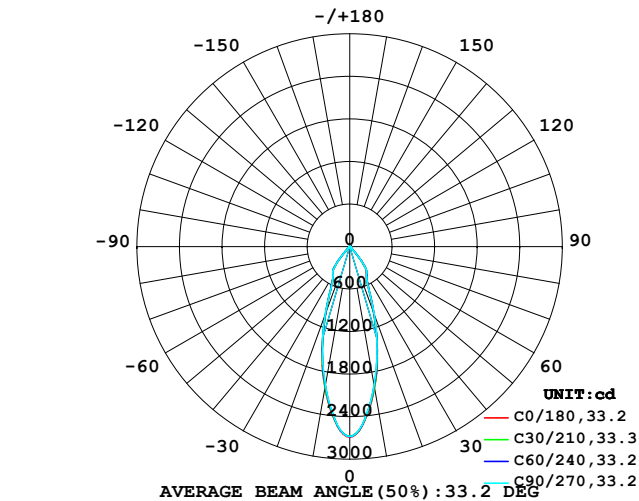

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

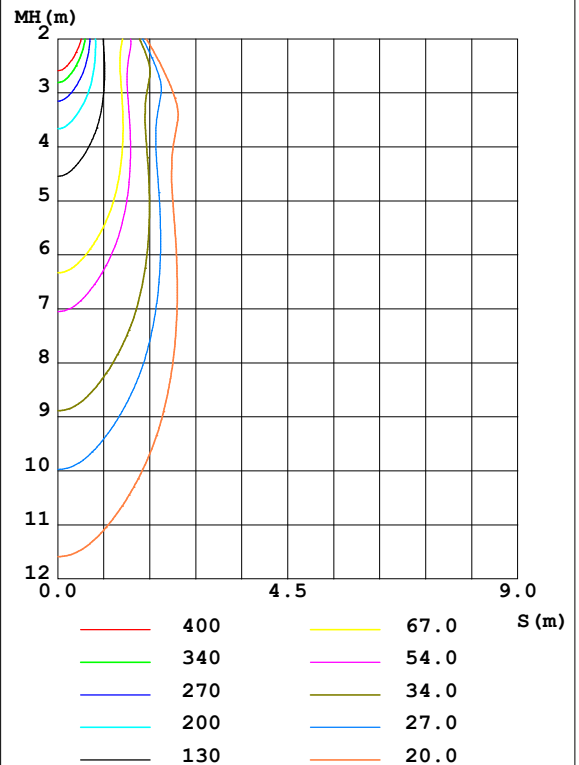

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2025-11-12

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7125]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	2024	2006	1988	2006	2024	2006	1988	2006	0- 10	219.3	219.3	17.5,17.5
20	993.0	997.7	1003	997.7	993.0	997.7	1003	997.7	10- 20	410.7	630.0	50.2,50.2
30	475.5	478.9	477.5	478.9	475.5	478.9	477.5	478.9	20- 30	299.5	929.4	74,74
40	223.3	224.3	224.7	224.3	223.3	224.3	224.7	224.3	30- 40	241.2	1171	93.2,93.2
50	17.31	17.37	18.11	17.37	17.31	17.37	18.11	17.37	40- 50	53.62	1224	97.5,97.5
60	8.182	8.251	8.546	8.251	8.182	8.251	8.546	8.251	50- 60	10.89	1235	98.4,98.4
70	2.729	2.750	2.800	2.750	2.729	2.750	2.800	2.750	60- 70	5.130	1240	98.8,98.8
80	1.531	1.564	1.591	1.564	1.531	1.564	1.591	1.564	70- 80	2.229	1243	99,99
90	1.285	1.314	1.324	1.314	1.285	1.314	1.324	1.314	80- 90	1.351	1244	99.1,99.1
100	1.591	1.595	1.596	1.595	1.591	1.595	1.596	1.595	90-100	1.588	1246	99.2,99.2
110	2.028	2.041	2.040	2.041	2.028	2.041	2.040	2.041	100-110	1.903	1247	99.4,99.4
120	2.411	2.414	2.407	2.414	2.411	2.414	2.407	2.414	110-120	2.235	1250	99.5,99.5
130	2.322	2.294	2.280	2.294	2.322	2.294	2.280	2.294	120-130	2.154	1252	99.7,99.7
140	1.889	1.850	1.835	1.850	1.889	1.850	1.835	1.850	130-140	1.619	1253	99.8,99.8
150	1.516	1.485	1.490	1.485	1.516	1.485	1.490	1.485	140-150	1.045	1254	99.9,99.9
160	1.224	1.204	1.225	1.204	1.224	1.204	1.225	1.204	150-160	0.6347	1255	100,100
170	0.8837	0.8748	0.8645	0.8748	0.8837	0.8748	0.8645	0.8748	160-170	0.2966	1255	100,100
180	0.8003	0.8058	0.7956	0.8058	0.8003	0.8058	0.7956	0.8058	170-180	0.0793	1255	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 1214.1 lm

%lum = 96.7%

%lamp = 96.7%

Conical surface Flux(120deg): 1235.2 lm

%lum = 98.4%


%lamp = 98.4%

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2025-11-12

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity:65.0%
 Test Distance:8.000m [K=0.7125]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:230.2V I:0.0657A P:10.964W PF:0.7248 Freq:49.99Hz Lamp Flux:1255.47x1 lm		
Name: P5-930-10W	Type: LED	
MFR.:		

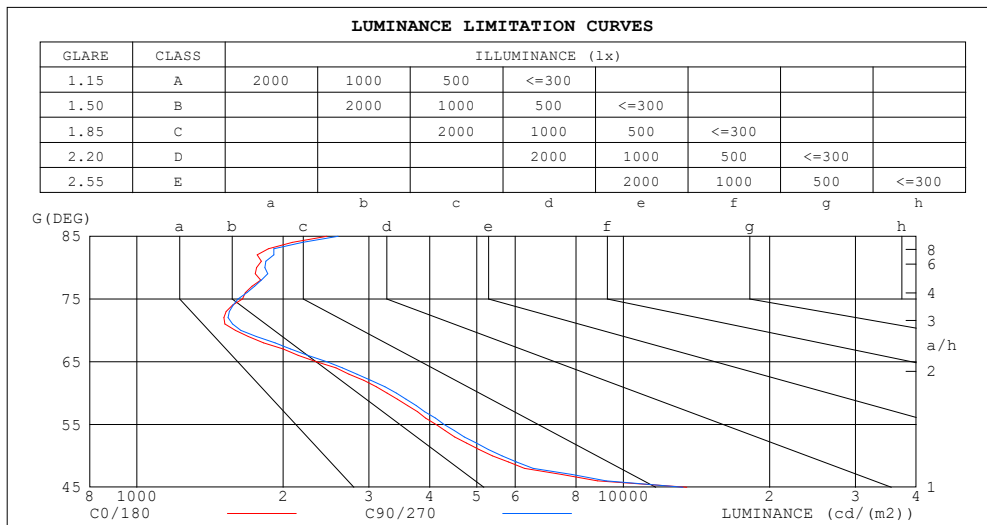

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	2459	2595
80	1763	1833
75	1648	1615
70	1596	1637
65	2342	2462
60	3273	3418
55	4125	4285
50	5384	5634
45	13506	13265


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2025-11-12

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7125]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:230.2V I:0.0657A P:10.964W PF:0.7248 Freq:49.99Hz		
Lamp Flux:1255.47x1 lm		
Name: P5-930-10W	Type: LED	
MFR.:		

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	Coefficients of Utilization(CU)															
RCR:Room Cavity Ratio																
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.01	1.01	1.01	.99
1.0	1.11	1.09	1.06	1.09	1.07	1.05	1.05	1.03	1.01	1.01	.99	.98	.97	.96	.95	.93
2.0	1.04	1.00	.97	1.02	.99	.96	.99	.96	.93	.96	.93	.91	.93	.91	.89	.88
3.0	.97	.93	.89	.96	.92	.88	.93	.90	.87	.91	.88	.85	.88	.86	.84	.82
4.0	.92	.87	.83	.91	.86	.82	.88	.84	.81	.86	.83	.80	.84	.81	.79	.78
5.0	.87	.81	.77	.86	.81	.77	.84	.79	.76	.82	.78	.75	.80	.77	.75	.73
6.0	.82	.76	.72	.81	.76	.72	.79	.75	.72	.78	.74	.71	.77	.73	.70	.69
7.0	.78	.72	.68	.77	.72	.68	.76	.71	.68	.74	.70	.67	.73	.70	.67	.65
8.0	.74	.68	.64	.73	.68	.64	.72	.67	.64	.71	.67	.64	.70	.66	.63	.62
9.0	.70	.65	.61	.70	.65	.61	.69	.64	.61	.68	.64	.60	.67	.63	.60	.59
10.0	.67	.62	.58	.67	.61	.58	.66	.61	.58	.65	.61	.58	.64	.60	.57	.56

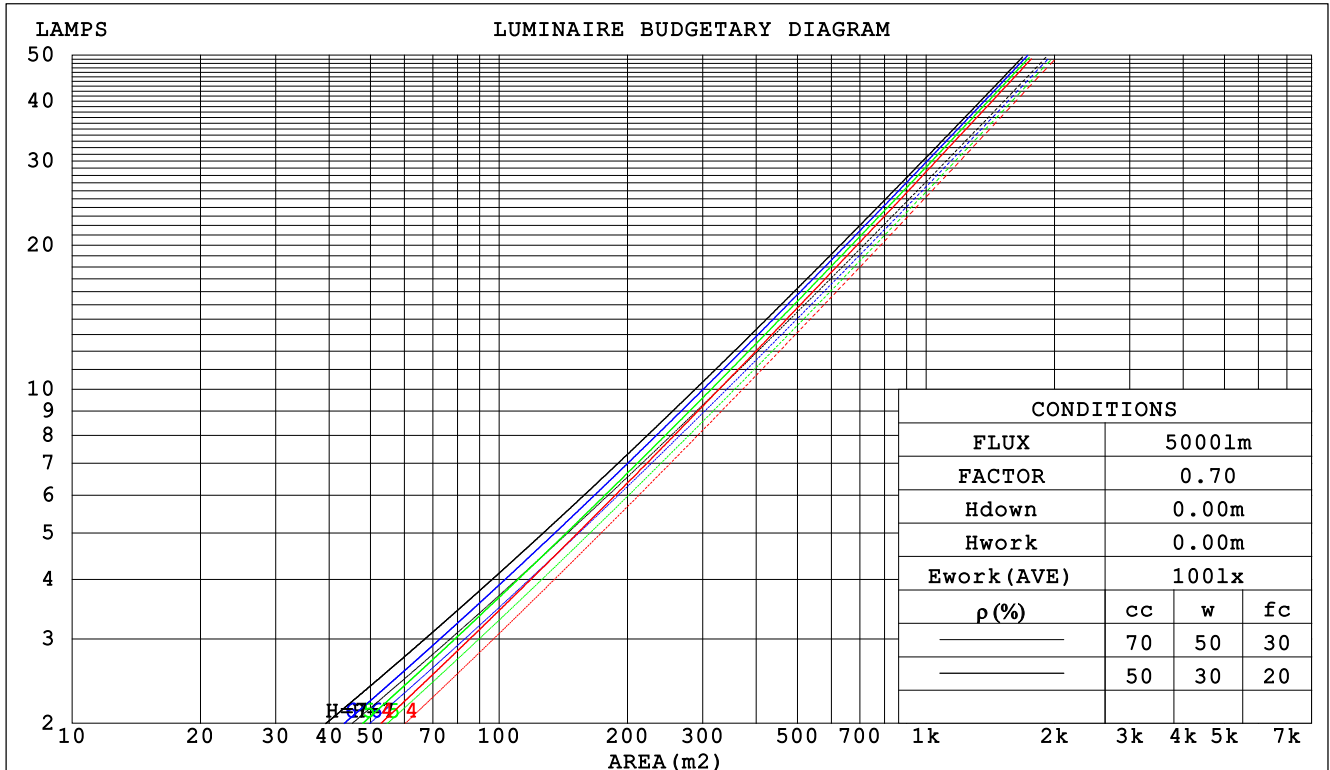

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2025-11-12

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity:65.0%
 Test Distance:8.000m [K=0.7125]
 Remarks:

WEC AND CCEC

Test:U:230.2V I:0.0657A P:10.964W PF:0.7248 Freq:49.99Hz		
Lamp Flux:1255.47x1 lm		
Name: P5-930-10W	Type: LED	
MFR.:		

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients (WEC)										
0.0																	
1.0	.170	.096	.031	.163	.093	.029	.149	.086	.027	.137	.079	.025	.126	.073	.024		
2.0	.161	.088	.027	.155	.085	.026	.144	.080	.025	.134	.075	.024	.125	.071	.022		
3.0	.153	.081	.024	.148	.079	.024	.138	.075	.023	.130	.071	.022	.122	.067	.021		
4.0	.145	.075	.022	.141	.074	.022	.132	.070	.021	.125	.067	.020	.118	.064	.020		
5.0	.138	.070	.020	.134	.069	.020	.127	.066	.019	.120	.064	.019	.114	.061	.018		
6.0	.131	.066	.019	.128	.065	.019	.122	.062	.018	.116	.060	.018	.110	.058	.017		
7.0	.125	.062	.018	.122	.061	.017	.117	.059	.017	.112	.057	.017	.107	.055	.016		
8.0	.120	.058	.016	.117	.058	.016	.112	.056	.016	.108	.054	.016	.103	.053	.015		
9.0	.115	.055	.015	.112	.055	.015	.108	.053	.015	.104	.052	.015	.100	.051	.015		
10.0	.110	.053	.015	.108	.052	.015	.104	.051	.014	.100	.050	.014	.096	.049	.014		

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)										
0.0	.197	.197	.197	.169	.169	.169	.115	.115	.115	.066	.066	.066	.021	.021	.021		
1.0	.178	.164	.153	.152	.141	.131	.104	.097	.091	.060	.056	.053	.019	.018	.017		
2.0	.162	.140	.121	.139	.120	.105	.095	.083	.073	.055	.048	.043	.018	.016	.014		
3.0	.149	.121	.098	.128	.104	.085	.088	.072	.060	.051	.042	.035	.016	.014	.012		
4.0	.138	.106	.081	.119	.091	.070	.082	.064	.050	.047	.037	.029	.015	.012	.010		
5.0	.129	.094	.068	.111	.081	.059	.076	.057	.042	.044	.033	.025	.014	.011	.008		
6.0	.122	.085	.058	.104	.073	.051	.072	.051	.036	.042	.030	.021	.013	.010	.007		
7.0	.115	.077	.051	.099	.067	.044	.068	.047	.031	.040	.028	.019	.013	.009	.006		
8.0	.109	.071	.044	.094	.061	.039	.065	.043	.027	.038	.025	.016	.012	.008	.005		
9.0	.104	.065	.039	.089	.057	.034	.062	.040	.024	.036	.024	.015	.012	.008	.005		
10.0	.099	.061	.036	.085	.053	.031	.059	.037	.022	.035	.022	.013	.011	.007	.004		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2025-11-12

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7125]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:230.2V I:0.0657A P:10.964W PF:0.7248 Freq:49.99Hz Lamp Flux:1255.47x1 lm										
Name: P5-930-10W					Type: LED					
MFR.:										
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	19.0	19.8	19.2	20.0	20.2	18.9	19.8	19.2	20.0	20.2
3H	18.8	19.6	19.1	19.8	20.0	18.8	19.6	19.1	19.8	20.0
4H	18.7	19.5	19.0	19.7	20.0	18.7	19.5	19.0	19.7	19.9
6H	18.7	19.4	19.0	19.6	19.9	18.6	19.3	18.9	19.6	19.9
8H	18.6	19.3	18.9	19.6	19.8	18.6	19.3	18.9	19.6	19.8
12H	18.6	19.2	18.9	19.5	19.8	18.6	19.2	18.9	19.5	19.8
4H 2H	18.7	19.5	19.0	19.7	19.9	18.7	19.5	19.0	19.7	19.9
3H	18.6	19.2	18.9	19.5	19.8	18.5	19.2	18.9	19.5	19.8
4H	18.5	19.1	18.8	19.4	19.7	18.5	19.1	18.8	19.4	19.7
6H	18.4	18.9	18.8	19.3	19.6	18.4	18.9	18.8	19.3	19.6
8H	18.4	18.9	18.8	19.2	19.6	18.4	18.8	18.8	19.2	19.6
12H	18.3	18.8	18.8	19.2	19.6	18.3	18.8	18.7	19.1	19.6
8H 4H	18.3	18.8	18.7	19.2	19.6	18.3	18.8	18.7	19.2	19.6
6H	18.3	18.7	18.7	19.1	19.5	18.3	18.7	18.7	19.1	19.5
8H	18.2	18.6	18.7	19.0	19.5	18.2	18.6	18.7	19.0	19.5
12H	18.2	18.5	18.7	19.0	19.4	18.2	18.5	18.7	18.9	19.4
12H 4H	18.3	18.7	18.7	19.1	19.5	18.3	18.7	18.7	19.1	19.5
6H	18.2	18.6	18.7	19.0	19.5	18.2	18.6	18.7	19.0	19.4
8H	18.2	18.5	18.7	18.9	19.4	18.2	18.5	18.7	18.9	19.4
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 3.4 / -10.4					+ 3.4 / -10.4				
1.5H	+ 6.1 / - 9.4					+ 6.1 / - 9.3				
2.0H	+ 5.1 / - 1.9					+ 4.9 / - 1.9				

CIE Pub.117, 1255 lm Total Lamp Luminous Flux Corrected ($8\log(F/F_0) = 0.8$)
Area: 0.005 m²

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2025-11-12

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7125]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:230.2V I:0.0657A P:10.964W PF:0.7248 Freq:49.99Hz		
Lamp Flux:1255.47x1 lm		
Name: P5-930-10W	Type: LED	
MFR.:		


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) k(RI) x RCR = 5									
k = 0.60	87	81	77	87	81	77	86	80	77	73
0.80	95	89	85	94	89	85	93	88	85	81
1.00	99	94	90	98	93	90	97	93	89	85
1.25	103	98	94	102	97	94	100	96	93	89
1.50	106	101	98	104	100	97	102	99	96	91
2.00	108	104	101	107	103	100	104	101	99	93
2.50	110	106	103	108	105	102	105	102	100	94
3.00	112	108	105	110	107	104	106	104	102	95
4.00	114	111	109	111	109	107	108	106	104	97
5.00	115	113	111	113	111	109	109	107	106	98
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004										
Suspended										
SHRNOM = 1.25										

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2025-11-12

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7125]
Remarks:

ISOCANDELA DIAGRAM

Test:U:230.2V I:0.0657A P:10.964W PF:0.7248 Freq:49.99Hz Lamp Flux:1255.47x1 lm		
Name: P5-930-10W	Type: LED	
MFR.:		

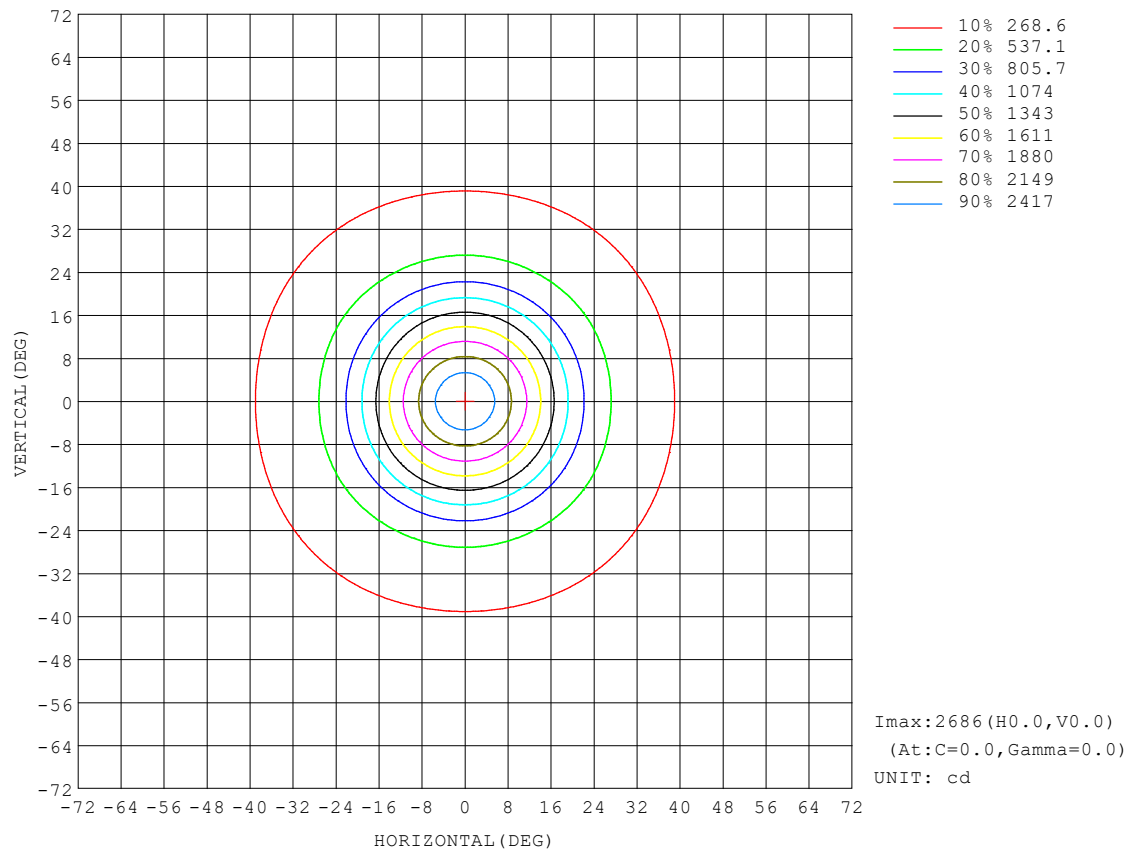


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2025-11-12

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7125]
Remarks:

AAI Figure

Test:U:230.2V I:0.0657A P:10.964W PF:0.7248 Freq:49.99Hz Lamp Flux:1255.47x1 lm		
Name: P5-930-10W	Type: LED	
MFR.:		

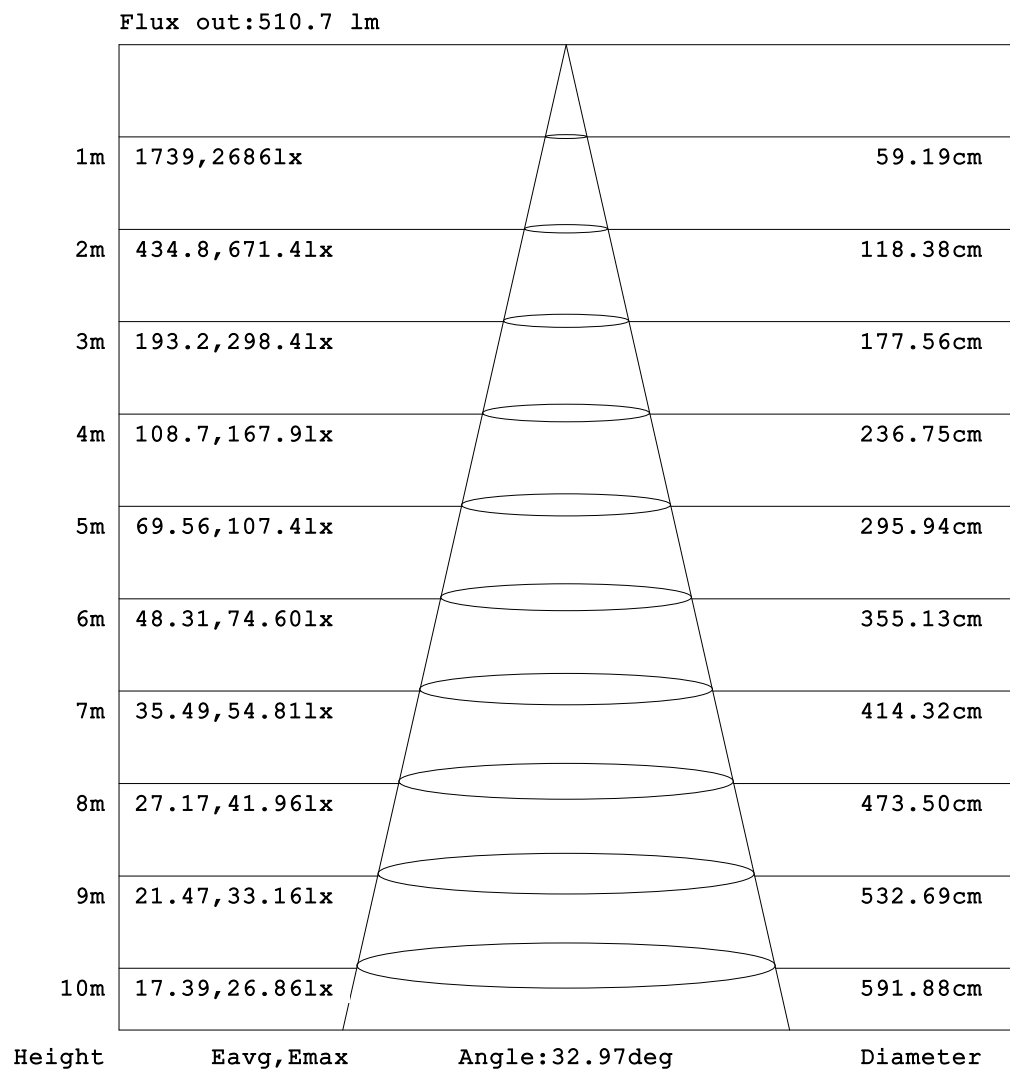


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2025-11-12

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7125]
Remarks:

ISOLUX DIAGRAM


Test:U:230.2V I:0.0657A P:10.964W PF:0.7248 Freq:49.99Hz Lamp Flux:1255.47x1 lm		
Name: P5-930-10W	Type: LED	
MFR.:		

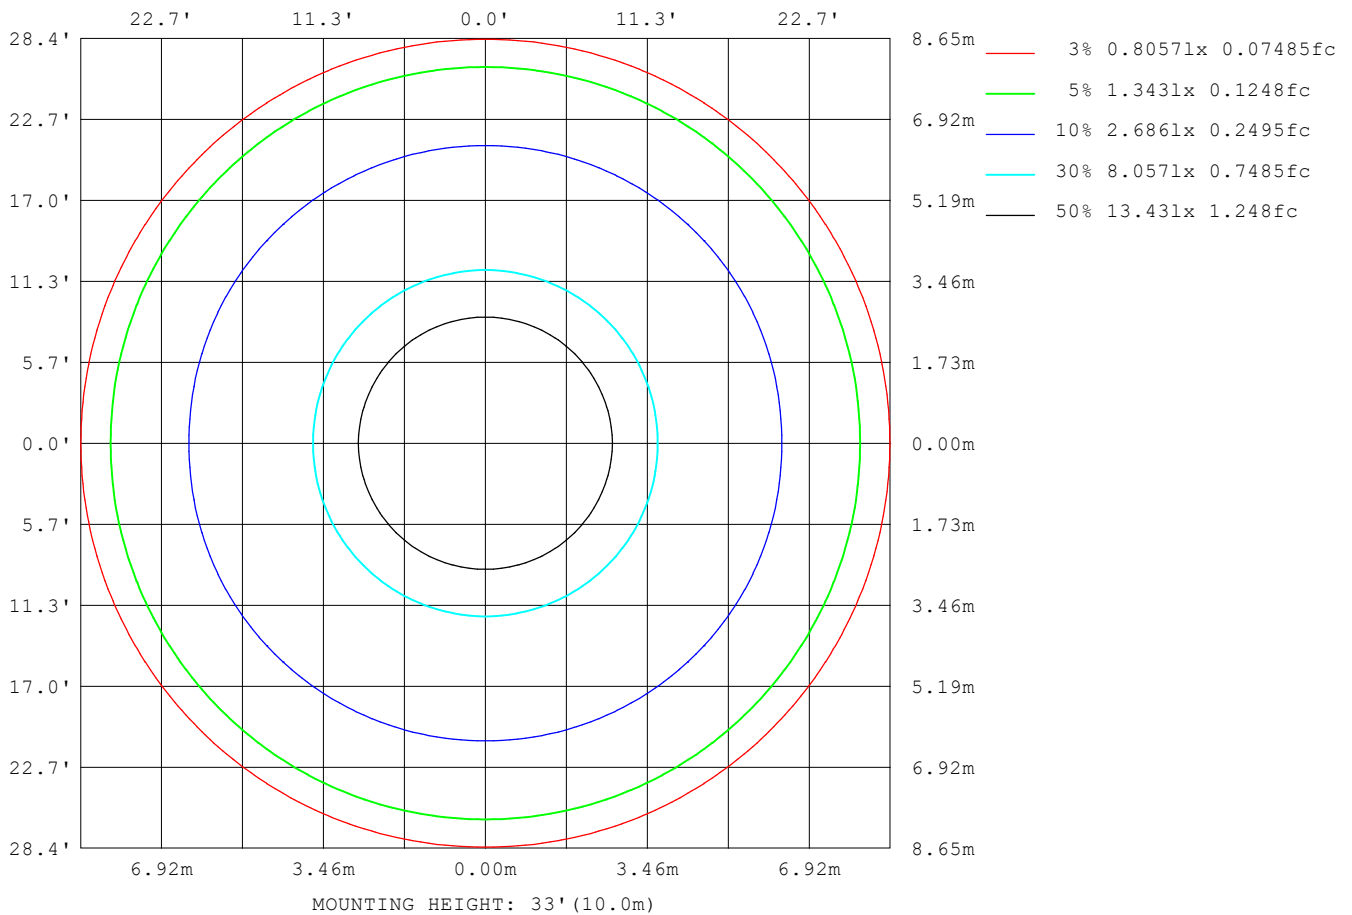

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2025-11-12

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7125]
Remarks:

Planar Illuminance Curve

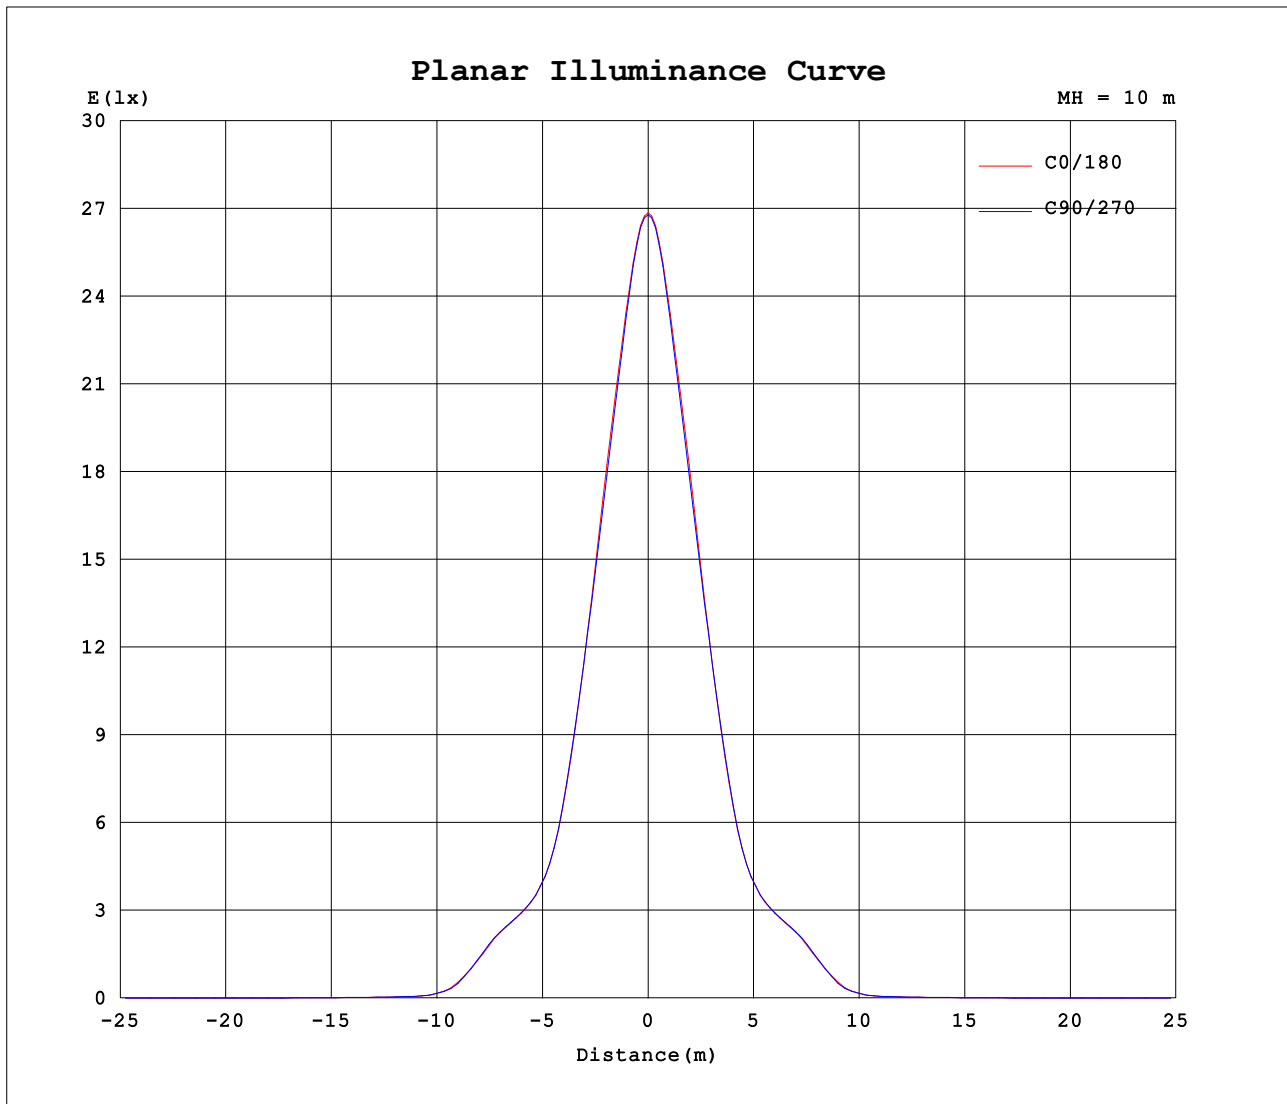

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2025-11-12

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity: 65.0%
 Test Distance: 8.000m [K=0.7125]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:230.2V I:0.0657A P:10.964W PF:0.7248 Freq:49.99Hz																	
Lamp Flux:1255.47x1 lm																	
Name: P5-930-10W									Type: LED								
MFR.:																	

Table--1

UNIT: cd

C (DEG) γ (DEG)	C (DEG)																	
	0	30	60	90	120	150	180	210	240	270	300	330						
0	2686	2673	2680	2679	2680	2673	2686	2673	2680	2679	2680	2673						
5	2460	2451	2445	2443	2445	2451	2460	2451	2445	2443	2445	2451						
10	2024	2015	1997	1988	1997	2015	2024	2015	1997	1988	1997	2015						
15	1512	1505	1501	1497	1501	1505	1512	1505	1501	1497	1501	1505						
20	993	996	1000	1003	1000	996	993	996	1000	1003	1000	996						
25	618	620	621	617	621	620	618	620	621	617	621	620						
30	476	479	478	477	478	479	476	479	478	477	478	479						
35	411	417	417	414	417	417	411	417	417	414	417	417						
40	223	224	225	225	225	224	223	224	225	225	225	224						
45	47.8	42.5	38.7	46.9	38.7	42.5	47.8	42.5	38.7	46.9	38.7	42.5						
50	17.3	17.2	17.5	18.1	17.5	17.2	17.3	17.2	17.5	18.1	17.5	17.2						
55	11.8	11.7	12.0	12.3	12.0	11.7	11.8	11.7	12.0	12.3	12.0	11.7						
60	8.18	8.15	8.36	8.55	8.36	8.15	8.18	8.15	8.36	8.55	8.36	8.15						
65	4.95	4.91	5.10	5.20	5.10	4.91	4.95	4.91	5.10	5.20	5.10	4.91						
70	2.73	2.75	2.75	2.80	2.75	2.75	2.73	2.75	2.75	2.80	2.75	2.75						
75	2.13	2.15	2.10	2.09	2.10	2.15	2.13	2.15	2.10	2.09	2.10	2.15						
80	1.53	1.55	1.58	1.59	1.58	1.55	1.53	1.55	1.58	1.59	1.58	1.55						
85	1.07	1.10	1.12	1.13	1.12	1.10	1.07	1.10	1.12	1.13	1.12	1.10						
90	1.29	1.31	1.32	1.32	1.32	1.31	1.29	1.31	1.32	1.32	1.32	1.31						
95	1.45	1.46	1.46	1.46	1.46	1.46	1.45	1.46	1.46	1.46	1.46	1.46						
100	1.59	1.60	1.59	1.60	1.59	1.60	1.59	1.60	1.59	1.60	1.59	1.60						
105	1.78	1.79	1.79	1.80	1.79	1.79	1.78	1.79	1.79	1.80	1.79	1.79						
110	2.03	2.04	2.04	2.04	2.04	2.04	2.03	2.04	2.04	2.04	2.04	2.04						
115	2.27	2.27	2.27	2.26	2.27	2.27	2.27	2.27	2.27	2.26	2.27	2.27						
120	2.41	2.42	2.41	2.41	2.41	2.42	2.41	2.42	2.41	2.41	2.41	2.42						
125	2.43	2.43	2.42	2.41	2.42	2.43	2.43	2.43	2.42	2.41	2.42	2.43						
130	2.32	2.30	2.29	2.28	2.29	2.30	2.32	2.30	2.29	2.28	2.29	2.30						
135	2.12	2.09	2.08	2.07	2.08	2.09	2.12	2.09	2.08	2.07	2.08	2.09						
140	1.89	1.86	1.84	1.84	1.84	1.86	1.89	1.86	1.84	1.84	1.84	1.86						
145	1.68	1.65	1.64	1.64	1.64	1.65	1.68	1.65	1.64	1.64	1.64	1.65						
150	1.52	1.49	1.49	1.49	1.49	1.49	1.52	1.49	1.49	1.49	1.49	1.49						
155	1.39	1.36	1.37	1.38	1.37	1.36	1.39	1.36	1.37	1.38	1.37	1.36						
160	1.22	1.20	1.21	1.23	1.21	1.20	1.22	1.20	1.21	1.23	1.21	1.20						
165	1.03	1.01	1.02	1.03	1.02	1.01	1.03	1.01	1.02	1.03	1.02	1.01						
170	0.88	0.88	0.87	0.86	0.87	0.88	0.88	0.88	0.87	0.86	0.87	0.88						
175	0.81	0.81	0.81	0.80	0.81	0.81	0.81	0.81	0.81	0.80	0.81	0.81						
180	0.80	0.81	0.81	0.80	0.81	0.81	0.80	0.81	0.81	0.80	0.81	0.81						

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2025-11-12

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7125]
Remarks: