



LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:230.3V I:0.1020A P:20.487W PF:0.8723 Freq:49.99Hz Lamp Flux:2306.78x1 lm		
Name: P5-930-20W	Type: LED	
MFR.:		

DATA OF LAMP		PHOTOMETRIC DATA Eff: 112.60 lm/W			
MODEL		I _{max} (cd)	4947	S/MH (C0/180)	0.57
NOMINAL POWER (W)	20	LOR (%)	100.0	S/MH (C90/270)	0.57
RATED VOLTAGE (V)	230	TOTAL FLUX (lm)	2306.8	η UP, DN (C0-180)	0.5, 49.5
NOMINAL FLUX (lm)	2306.78	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.5, 49.5
LAMPS INSIDE	1	η up (%)	1.0	CIBSE SHR NOM	0.50
TEST VOLTAGE (V)	230	η down (%)	99.0	CIBSE SHR MAX	0.55

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

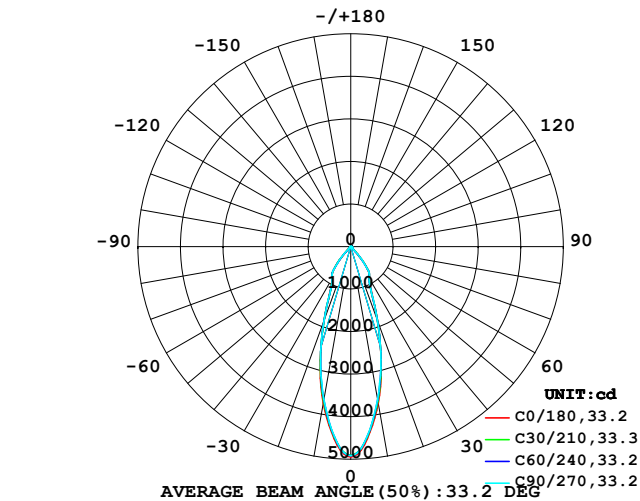

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

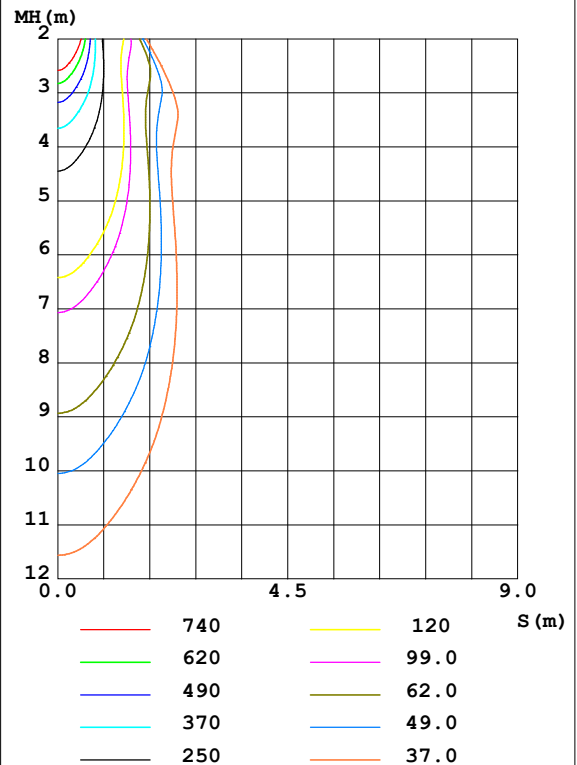

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2025-11-12

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7125]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	3729	3678	3646	3678	3729	3678	3646	3678	0- 10	402.5	402.5	17.4,17.4
20	1830	1831	1841	1831	1830	1831	1841	1831	10- 20	754.1	1157	50.1,50.1
30	877.9	879.8	877.1	879.8	877.9	879.8	877.1	879.8	20- 30	549.7	1706	74,74
40	411.1	411.8	409.8	411.8	411.1	411.8	409.8	411.8	30- 40	443.2	2149	93.2,93.2
50	31.98	31.97	33.35	31.97	31.98	31.97	33.35	31.97	40- 50	98.02	2247	97.4,97.4
60	15.25	15.34	15.90	15.34	15.25	15.34	15.90	15.34	50- 60	20.16	2268	98.3,98.3
70	5.227	5.236	5.332	5.236	5.227	5.236	5.332	5.236	60- 70	9.616	2277	98.7,98.7
80	3.025	3.075	3.129	3.075	3.025	3.075	3.129	3.075	70- 80	4.303	2282	98.9,98.9
90	2.574	2.614	2.632	2.614	2.574	2.614	2.632	2.614	80- 90	2.704	2284	99,99
100	3.134	3.129	3.129	3.129	3.134	3.129	3.129	3.129	90-100	3.137	2287	99.2,99.2
110	3.947	3.953	3.950	3.953	3.947	3.953	3.950	3.953	100-110	3.710	2291	99.3,99.3
120	4.649	4.629	4.618	4.629	4.649	4.629	4.618	4.629	110-120	4.307	2295	99.5,99.5
130	4.488	4.415	4.392	4.415	4.488	4.415	4.392	4.415	120-130	4.137	2300	99.7,99.7
140	3.688	3.601	3.575	3.601	3.688	3.601	3.575	3.601	130-140	3.130	2303	99.8,99.8
150	2.999	2.933	2.937	2.933	2.999	2.933	2.937	2.933	140-150	2.048	2305	99.9,99.9
160	2.459	2.414	2.454	2.414	2.459	2.414	2.454	2.414	150-160	1.260	2306	100,100
170	1.838	1.813	1.795	1.813	1.838	1.813	1.795	1.813	160-170	0.6031	2307	100,100
180	1.683	1.683	1.663	1.683	1.683	1.683	1.663	1.683	170-180	0.1654	2307	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 2229 lm

%lum = 96.6%

%lamp = 96.6%

Conical surface Flux(120deg): 2267.7 lm

%lum = 98.3%


%lamp = 98.3%

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2025-11-12

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity:65.0%
 Test Distance:8.000m [K=0.7125]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:230.3V I:0.1020A P:20.487W PF:0.8723 Freq:49.99Hz Lamp Flux:2306.78x1 lm		
Name: P5-930-20W	Type: LED	
MFR.:		

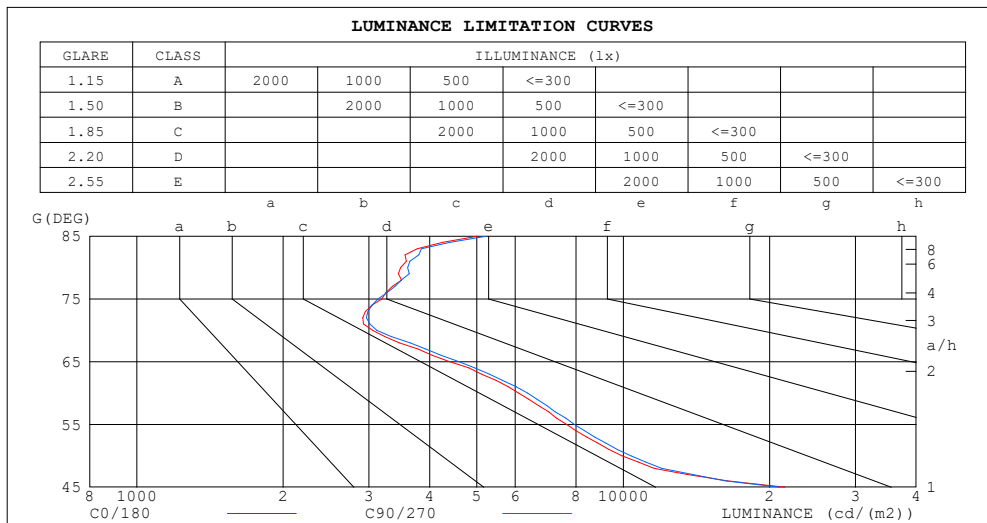

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	5007	5227
80	3484	3604
75	3186	3132
70	3056	3118
65	4404	4602
60	6098	6358
55	7656	7941
50	9950	10376
45	21510	21018


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2025-11-12

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7125]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:230.3V I:0.1020A P:20.487W PF:0.8723 Freq:49.99Hz		
Lamp Flux:2306.78x1 lm		
Name: P5-930-20W	Type: LED	
MFR.:		

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	Coefficients of Utilization(CU)															
RCR:Room Cavity Ratio																
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.01	1.01	1.01	.99
1.0	1.11	1.09	1.06	1.09	1.07	1.05	1.04	1.03	1.01	1.01	.99	.98	.97	.96	.95	.93
2.0	1.04	1.00	.97	1.02	.99	.96	.99	.96	.93	.96	.93	.91	.93	.91	.89	.88
3.0	.97	.93	.89	.96	.92	.88	.93	.90	.87	.91	.88	.85	.88	.86	.84	.82
4.0	.92	.87	.83	.90	.86	.82	.88	.84	.81	.86	.83	.80	.84	.81	.79	.77
5.0	.86	.81	.77	.86	.80	.77	.84	.79	.76	.82	.78	.75	.80	.77	.74	.73
6.0	.82	.76	.72	.81	.76	.72	.79	.75	.71	.78	.74	.71	.77	.73	.70	.69
7.0	.78	.72	.68	.77	.72	.68	.76	.71	.67	.74	.70	.67	.73	.69	.67	.65
8.0	.74	.68	.64	.73	.68	.64	.72	.67	.64	.71	.67	.64	.70	.66	.63	.62
9.0	.70	.65	.61	.70	.64	.61	.69	.64	.61	.68	.64	.60	.67	.63	.60	.59
10.0	.67	.62	.58	.67	.61	.58	.66	.61	.58	.65	.61	.58	.64	.60	.57	.56

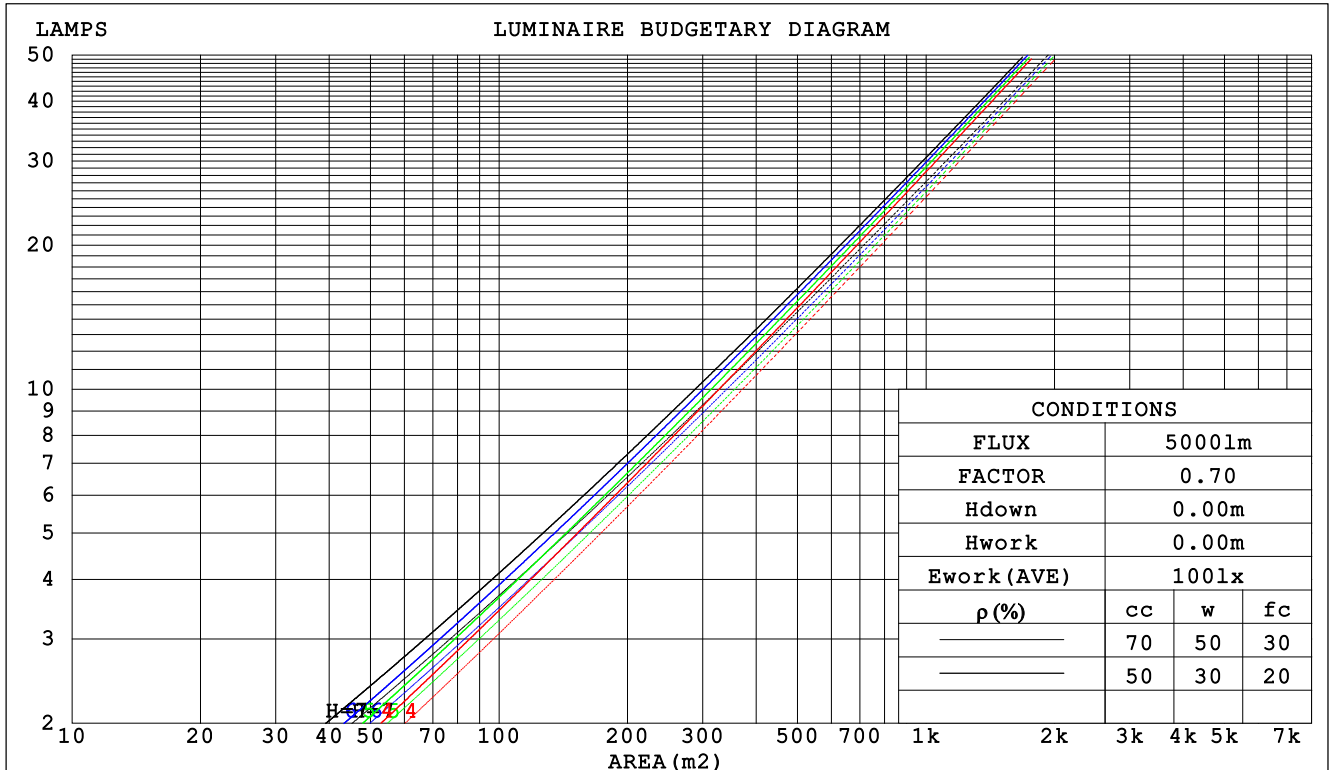

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2025-11-12

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity:65.0%
 Test Distance:8.000m [K=0.7125]
 Remarks:

WEC AND CCEC

Test:U:230.3V I:0.1020A P:20.487W PF:0.8723 Freq:49.99Hz		
Lamp Flux:2306.78x1 lm		
Name: P5-930-20W	Type: LED	
MFR.:		

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.170	.097	.031	.163	.093	.029	.150	.086	.027	.138	.079	.025	.127	.073	.024		
2.0	.161	.088	.027	.155	.086	.026	.144	.080	.025	.134	.075	.024	.125	.071	.022		
3.0	.153	.081	.024	.148	.079	.024	.138	.075	.023	.130	.071	.022	.122	.067	.021		
4.0	.145	.075	.022	.141	.074	.022	.133	.070	.021	.125	.067	.020	.118	.064	.020		
5.0	.138	.070	.020	.134	.069	.020	.127	.066	.019	.120	.064	.019	.114	.061	.018		
6.0	.131	.066	.019	.128	.065	.019	.122	.062	.018	.116	.060	.018	.110	.058	.017		
7.0	.125	.062	.018	.122	.061	.017	.117	.059	.017	.112	.057	.017	.107	.055	.016		
8.0	.120	.058	.016	.117	.058	.016	.112	.056	.016	.108	.054	.016	.103	.053	.015		
9.0	.115	.055	.015	.112	.055	.015	.108	.053	.015	.104	.052	.015	.100	.051	.015		
10.0	.110	.053	.015	.108	.052	.015	.104	.051	.014	.100	.050	.014	.096	.049	.014		

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)										
0.0	.198	.198	.198	.169	.169	.169	.115	.115	.115	.066	.066	.066	.021	.021	.021		
1.0	.178	.165	.153	.152	.141	.132	.104	.097	.091	.060	.056	.053	.019	.018	.017		
2.0	.162	.140	.121	.139	.121	.105	.095	.083	.073	.055	.049	.043	.018	.016	.014		
3.0	.149	.121	.098	.128	.104	.085	.088	.073	.060	.051	.042	.035	.016	.014	.012		
4.0	.139	.106	.081	.119	.092	.071	.082	.064	.050	.047	.037	.029	.015	.012	.010		
5.0	.130	.095	.069	.111	.082	.060	.077	.057	.042	.044	.034	.025	.014	.011	.008		
6.0	.122	.085	.059	.105	.074	.051	.072	.052	.036	.042	.030	.021	.014	.010	.007		
7.0	.115	.077	.051	.099	.067	.044	.069	.047	.031	.040	.028	.019	.013	.009	.006		
8.0	.109	.071	.045	.094	.062	.039	.065	.043	.028	.038	.026	.017	.012	.008	.005		
9.0	.104	.066	.040	.090	.057	.035	.062	.040	.025	.036	.024	.015	.012	.008	.005		
10.0	.100	.061	.036	.086	.053	.031	.060	.038	.022	.035	.022	.013	.011	.007	.004		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2025-11-12

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7125]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:230.3V I:0.1020A P:20.487W PF:0.8723 Freq:49.99Hz Lamp Flux:2306.78x1 lm										
Name: P5-930-20W					Type: LED					
MFR.:										
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	21.1	22.0	21.3	22.1	22.3	21.1	21.9	21.3	22.1	22.3
3H	20.9	21.7	21.2	22.0	22.2	20.9	21.7	21.2	21.9	22.1
4H	20.9	21.6	21.2	21.9	22.1	20.8	21.6	21.1	21.8	22.1
6H	20.8	21.5	21.1	21.8	22.0	20.8	21.5	21.1	21.7	22.0
8H	20.8	21.4	21.1	21.7	22.0	20.7	21.4	21.0	21.7	22.0
12H	20.7	21.4	21.0	21.7	21.9	20.7	21.3	21.0	21.6	21.9
4H 2H	20.9	21.6	21.1	21.8	22.1	20.8	21.6	21.1	21.8	22.1
3H	20.7	21.4	21.0	21.6	21.9	20.7	21.3	21.0	21.6	21.9
4H	20.6	21.2	21.0	21.5	21.9	20.6	21.2	21.0	21.5	21.8
6H	20.5	21.1	20.9	21.4	21.8	20.5	21.1	20.9	21.4	21.8
8H	20.5	21.0	20.9	21.4	21.8	20.5	21.0	20.9	21.3	21.7
12H	20.5	20.9	20.9	21.3	21.7	20.5	20.9	20.9	21.3	21.7
8H 4H	20.5	21.0	20.9	21.3	21.7	20.5	20.9	20.9	21.3	21.7
6H	20.4	20.8	20.9	21.2	21.7	20.4	20.8	20.8	21.2	21.6
8H	20.4	20.7	20.8	21.2	21.6	20.4	20.7	20.8	21.1	21.6
12H	20.4	20.7	20.8	21.1	21.6	20.3	20.6	20.8	21.1	21.6
12H 4H	20.4	20.9	20.9	21.3	21.7	20.4	20.9	20.8	21.2	21.6
6H	20.4	20.7	20.8	21.2	21.6	20.3	20.7	20.8	21.1	21.6
8H	20.3	20.6	20.8	21.1	21.6	20.3	20.6	20.8	21.1	21.6
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 3.4 / -10.2					+ 3.4 / -10.2				
1.5H	+ 6.1 / - 9.2					+ 6.1 / - 9.1				
2.0H	+ 4.1 / - 1.7					+ 3.9 / - 1.7				

CIE Pub.117, 2307 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 2.9)
Area: 0.005 m2

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2025-11-12

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7125]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:230.3V I:0.1020A P:20.487W PF:0.8723 Freq:49.99Hz		
Lamp Flux:2306.78x1 lm		
Name: P5-930-20W	Type: LED	
MFR.:		


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	87	81	77	87	81	77	86	80	77	73
0.80	95	89	85	94	89	85	93	88	85	81
1.00	99	94	90	98	93	90	97	93	89	85
1.25	103	98	94	102	97	94	100	96	93	89
1.50	106	101	98	104	100	97	102	99	96	91
2.00	108	104	101	107	103	100	104	101	99	93
2.50	110	106	103	108	105	102	105	102	100	94
3.00	112	108	105	110	107	104	106	104	102	95
4.00	114	111	109	111	109	107	108	106	104	97
5.00	115	113	111	113	111	109	108	107	106	98
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2025-11-12

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7125]
Remarks:

ISOCANDELA DIAGRAM

Test:U:230.3V I:0.1020A P:20.487W PF:0.8723 Freq:49.99Hz Lamp Flux:2306.78x1 lm		
Name: P5-930-20W	Type: LED	
MFR.:		

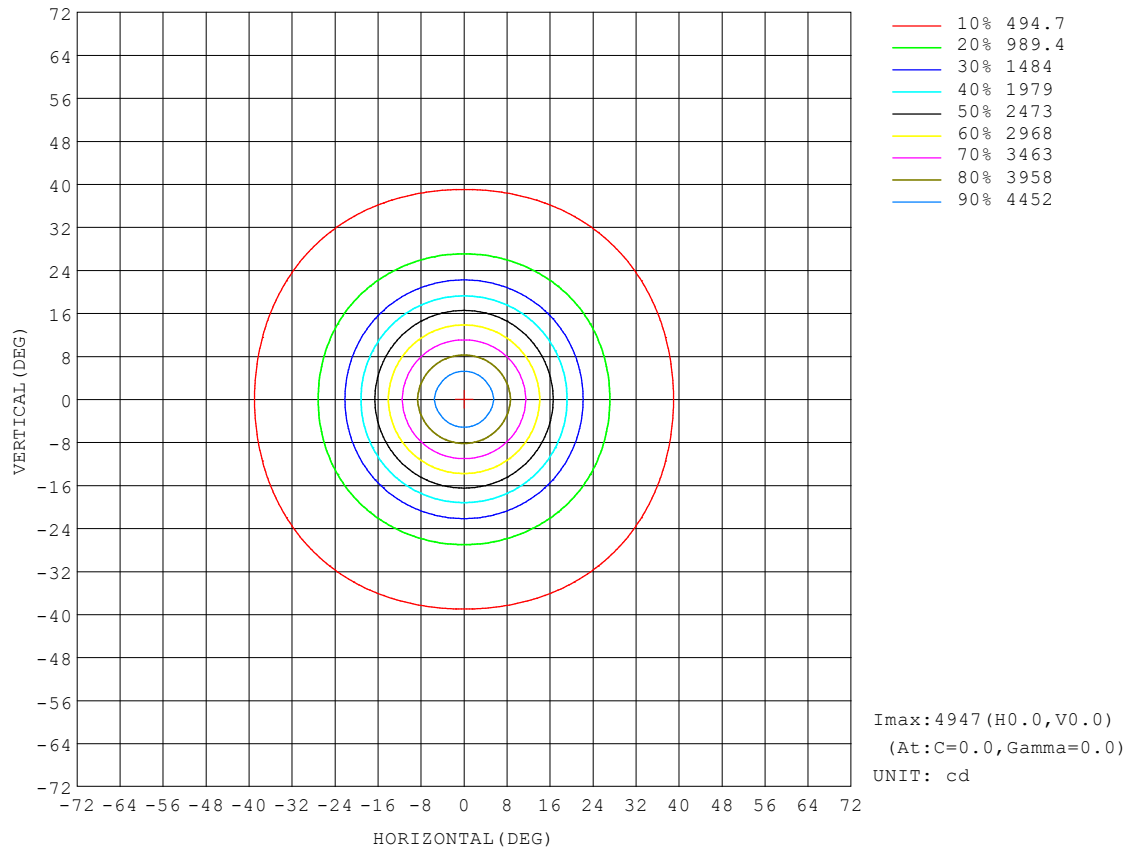


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2025-11-12

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7125]
Remarks:

AAI Figure

Test:U:230.3V I:0.1020A P:20.487W PF:0.8723 Freq:49.99Hz		
Lamp Flux:2306.78x1 lm		
Name: P5-930-20W	Type: LED	
MFR.:		

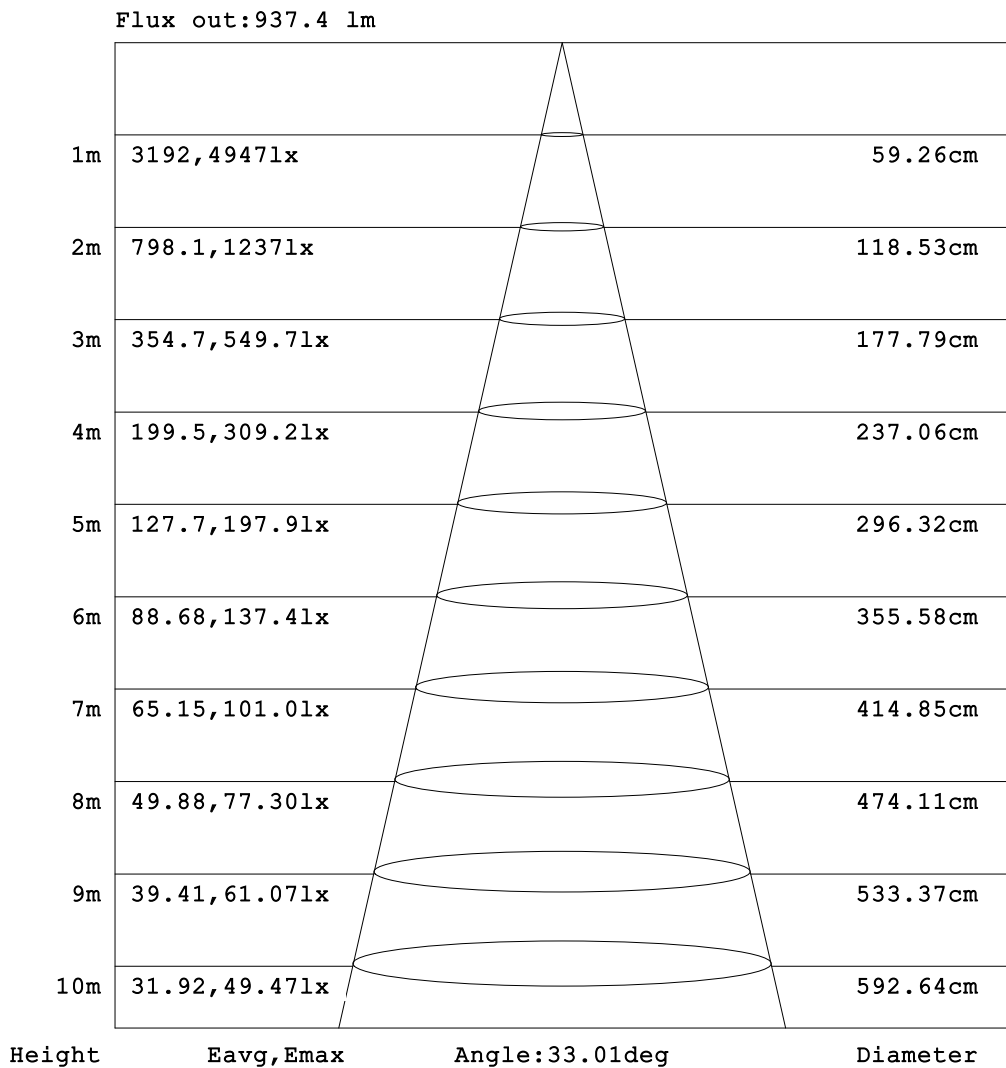


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2025-11-12

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7125]
Remarks:

ISOLUX DIAGRAM


Test:U:230.3V I:0.1020A P:20.487W PF:0.8723 Freq:49.99Hz Lamp Flux:2306.78x1 lm		
Name: P5-930-20W	Type: LED	
MFR.:		

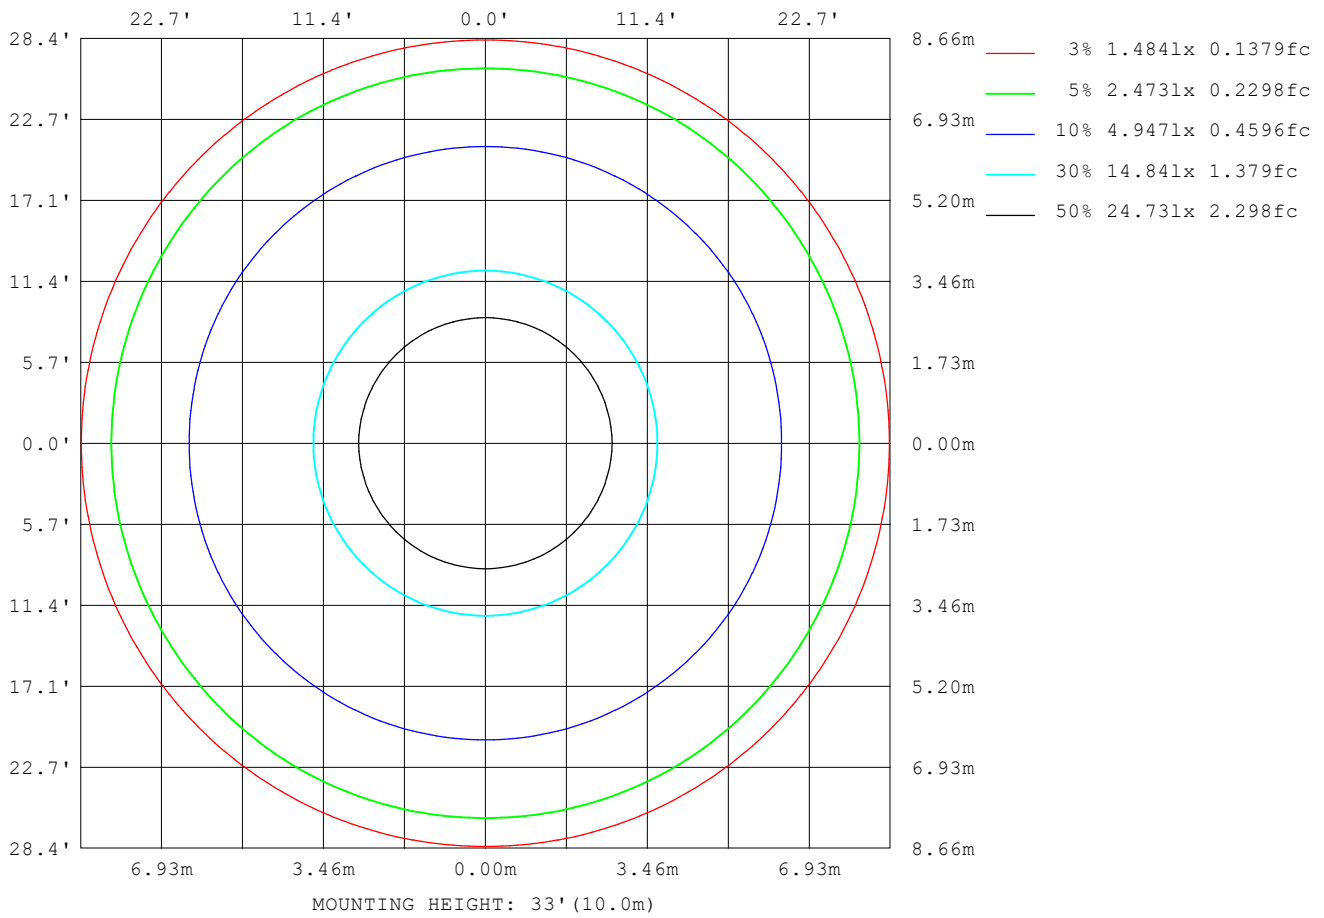

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2025-11-12

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7125]
Remarks:

Planar Illuminance Curve

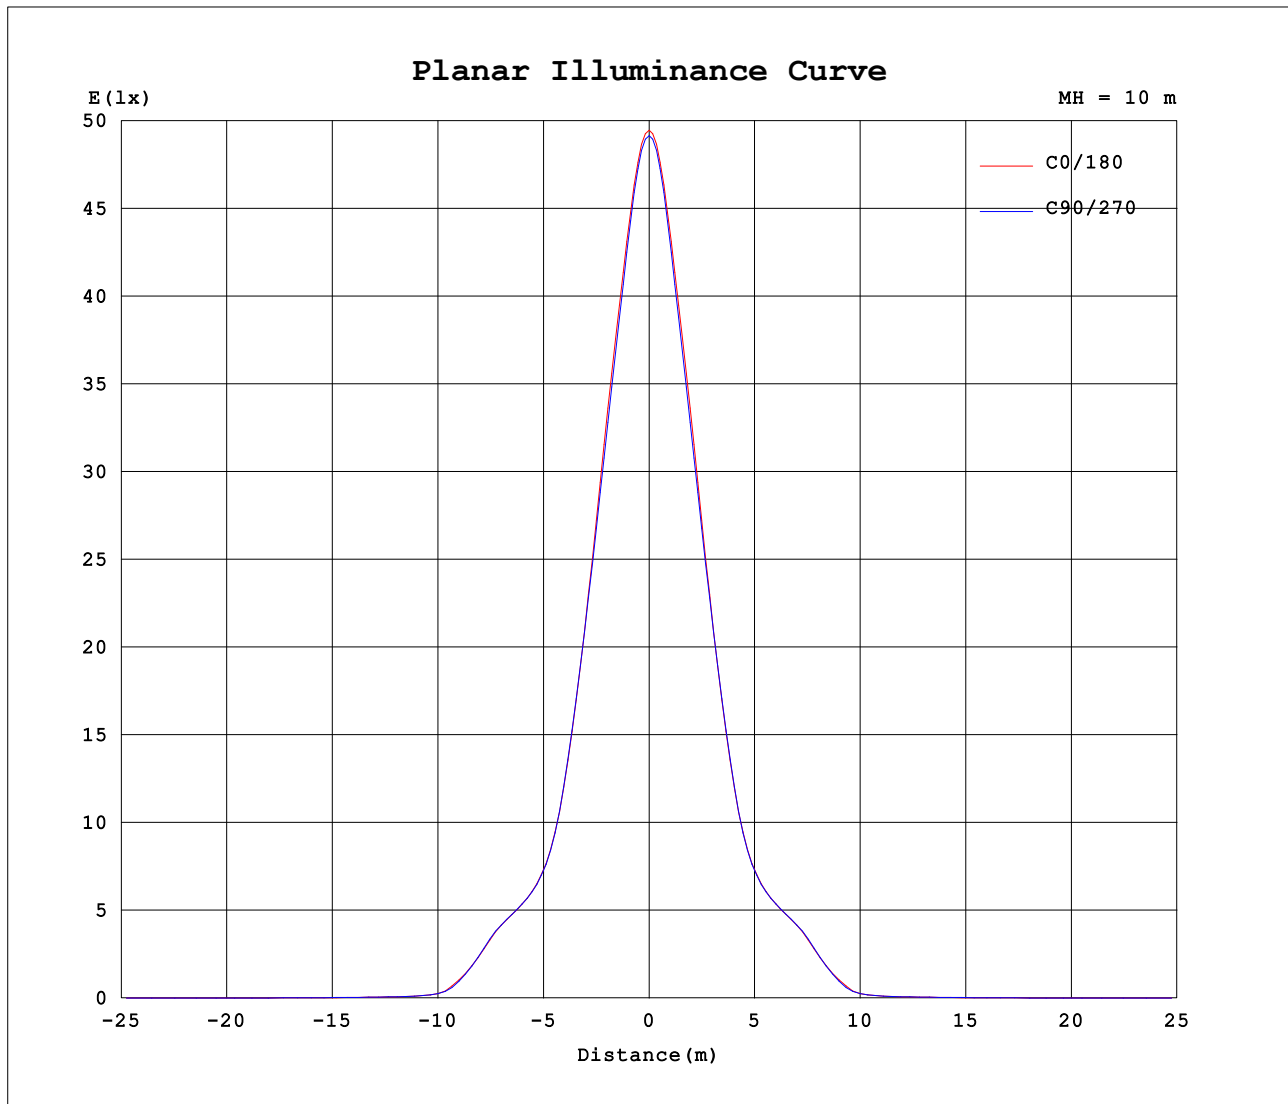

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2025-11-12

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity: 65.0%
 Test Distance: 8.000m [K=0.7125]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:230.3V I:0.1020A P:20.487W PF:0.8723 Freq:49.99Hz																	
Lamp Flux:2306.78x1 lm																	
Name: P5-930-20W									Type: LED								
MFR.:																	

Table--1

UNIT: cd

γ (DEG)	C (DEG)																	
	0	30	60	90	120	150	180	210	240	270	300	330						
0	4947	4903	4915	4916	4915	4903	4947	4903	4915	4916	4915	4903						
5	4530	4494	4484	4482	4484	4494	4530	4494	4484	4482	4484	4494						
10	3729	3694	3662	3646	3662	3694	3729	3694	3662	3646	3662	3694						
15	2785	2763	2754	2750	2754	2763	2785	2763	2754	2750	2754	2763						
20	1830	1827	1835	1841	1835	1827	1830	1827	1835	1841	1835	1827						
25	1139	1138	1133	1133	1133	1138	1139	1138	1133	1133	1133	1138						
30	878	881	879	877	879	881	878	881	879	877	879	881						
35	759	765	766	760	766	765	759	765	766	760	766	765						
40	411	411	413	410	413	411	411	411	413	410	413	411						
45	76.0	71.6	72.0	74.3	72.0	71.6	76.0	71.6	72.0	74.3	72.0	71.6						
50	32.0	31.7	32.2	33.3	32.2	31.7	32.0	31.7	32.2	33.3	32.2	31.7						
55	22.0	21.7	22.2	22.8	22.2	21.7	22.0	21.7	22.2	22.8	22.2	21.7						
60	15.2	15.2	15.5	15.9	15.5	15.2	15.2	15.2	15.5	15.9	15.5	15.2						
65	9.31	9.21	9.55	9.73	9.55	9.21	9.31	9.21	9.55	9.73	9.55	9.21						
70	5.23	5.23	5.24	5.33	5.24	5.23	5.23	5.23	5.24	5.33	5.24	5.23						
75	4.12	4.15	4.05	4.05	4.05	4.15	4.12	4.15	4.05	4.05	4.05	4.15						
80	3.03	3.04	3.11	3.13	3.11	3.04	3.03	3.04	3.11	3.13	3.11	3.04						
85	2.18	2.23	2.25	2.28	2.25	2.23	2.18	2.23	2.25	2.28	2.25	2.23						
90	2.57	2.61	2.62	2.63	2.62	2.61	2.57	2.61	2.62	2.63	2.62	2.61						
95	2.87	2.88	2.88	2.88	2.88	2.88	2.87	2.88	2.88	2.88	2.88	2.88						
100	3.13	3.13	3.13	3.13	3.13	3.13	3.13	3.13	3.13	3.13	3.13	3.13						
105	3.49	3.50	3.49	3.50	3.49	3.50	3.49	3.50	3.49	3.50	3.49	3.50						
110	3.95	3.96	3.95	3.95	3.95	3.96	3.95	3.96	3.95	3.95	3.95	3.96						
115	4.38	4.38	4.37	4.36	4.37	4.38	4.38	4.38	4.37	4.36	4.37	4.38						
120	4.65	4.63	4.62	4.62	4.62	4.63	4.65	4.63	4.62	4.62	4.62	4.63						
125	4.69	4.65	4.64	4.63	4.64	4.65	4.69	4.65	4.64	4.63	4.64	4.65						
130	4.49	4.42	4.41	4.39	4.41	4.42	4.49	4.42	4.41	4.39	4.41	4.42						
135	4.12	4.04	4.02	4.00	4.02	4.04	4.12	4.04	4.02	4.00	4.02	4.04						
140	3.69	3.61	3.59	3.57	3.59	3.61	3.69	3.61	3.59	3.57	3.59	3.61						
145	3.30	3.23	3.21	3.20	3.21	3.23	3.30	3.23	3.21	3.20	3.21	3.23						
150	3.00	2.93	2.93	2.94	2.93	2.93	3.00	2.93	2.93	2.94	2.93	2.93						
155	2.76	2.69	2.71	2.74	2.71	2.69	2.76	2.69	2.71	2.74	2.71	2.69						
160	2.46	2.40	2.43	2.45	2.43	2.40	2.46	2.40	2.43	2.45	2.43	2.40						
165	2.11	2.06	2.07	2.10	2.07	2.06	2.11	2.06	2.07	2.10	2.07	2.06						
170	1.84	1.82	1.81	1.80	1.81	1.82	1.84	1.82	1.81	1.80	1.81	1.82						
175	1.70	1.70	1.69	1.67	1.69	1.70	1.70	1.70	1.69	1.67	1.69	1.70						
180	1.68	1.68	1.68	1.66	1.68	1.68	1.68	1.68	1.68	1.66	1.68	1.68						

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2025-11-12

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7125]
Remarks: