


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:230.1V I:0.1340A P:28.940W PF:0.9384 Freq:49.98Hz Lamp Flux:3083.8x1 lm		
Name: P5-930-30W	Type: LED	
MFR.:		

DATA OF LAMP		PHOTOMETRIC DATA Eff: 106.56 lm/W			
MODEL		I _{max} (cd)	6466	S/MH (C0/180)	0.57
NOMINAL POWER(W)	30	LOR(%)	100.0	S/MH (C90/270)	0.57
RATED VOLTAGE(V)	230	TOTAL FLUX(lm)	3083.8	η UP,DN (C0-180)	0.5,49.5
NOMINAL FLUX(lm)	3083.8	CIE CLASS	DIRECT	η UP,DN (C180-360)	0.5,49.5
LAMPS INSIDE	1	η up (%)	1.0	CIBSE SHR NOM	0.50
TEST VOLTAGE(V)	230	η down (%)	99.0	CIBSE SHR MAX	0.55

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

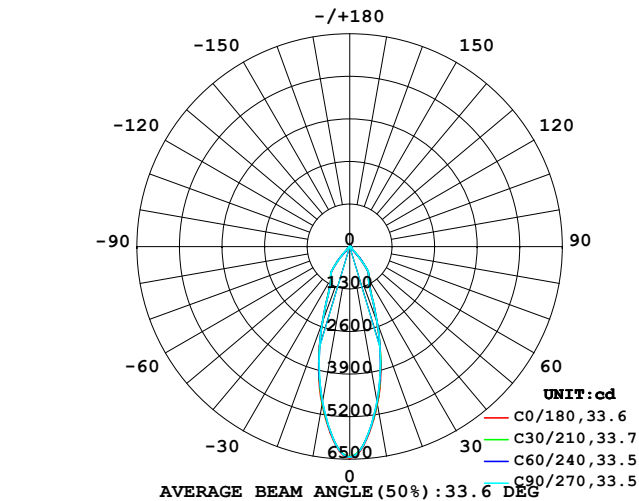

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

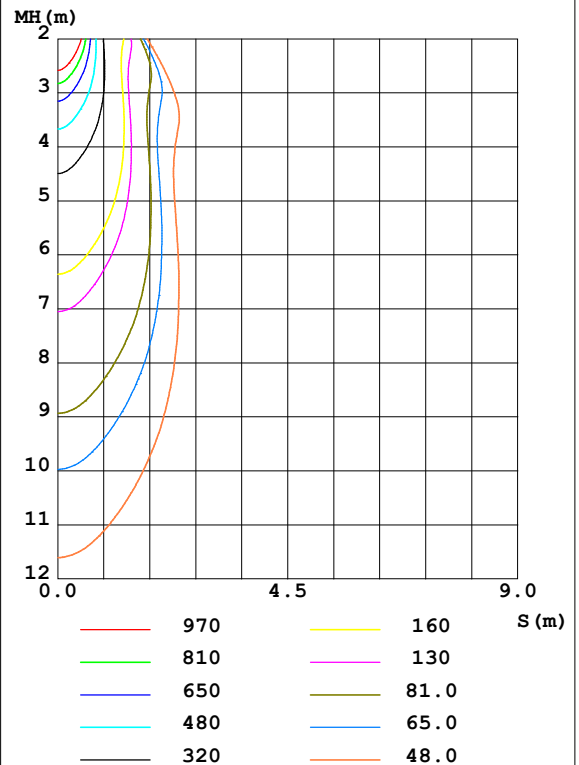

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2025-11-12

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7125]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	4886	4841	4809	4841	4886	4841	4809	4841	0- 10	528.0	528.0	17.1,17.1
20	2456	2446	2451	2446	2456	2446	2451	2446	10- 20	999.0	1527	49.5,49.5
30	1172	1168	1165	1168	1172	1168	1165	1168	20- 30	736.1	2263	73.4,73.4
40	575.4	580.3	575.6	580.3	575.4	580.3	575.6	580.3	30- 40	595.4	2859	92.7,92.7
50	44.79	44.26	45.20	44.26	44.79	44.26	45.20	44.26	40- 50	143.6	3002	97.4,97.4
60	21.43	21.32	21.27	21.32	21.43	21.32	21.27	21.32	50- 60	27.67	3030	98.2,98.2
70	7.585	7.692	7.371	7.692	7.585	7.692	7.371	7.692	60- 70	13.63	3043	98.7,98.7
80	4.424	4.517	4.479	4.517	4.424	4.517	4.479	4.517	70- 80	6.140	3050	98.9,98.9
90	3.476	3.543	3.564	3.543	3.476	3.543	3.564	3.543	80- 90	3.820	3053	99,99
100	4.223	4.215	4.206	4.215	4.223	4.215	4.206	4.215	90-100	4.226	3058	99.2,99.2
110	5.284	5.289	5.279	5.289	5.284	5.289	5.279	5.289	100-110	4.987	3063	99.3,99.3
120	6.198	6.154	6.133	6.154	6.198	6.154	6.133	6.154	110-120	5.740	3068	99.5,99.5
130	6.049	5.912	5.874	5.912	6.049	5.912	5.874	5.912	120-130	5.513	3074	99.7,99.7
140	5.080	4.914	4.876	4.914	5.080	4.914	4.876	4.914	130-140	4.234	3078	99.8,99.8
150	4.189	4.067	4.071	4.067	4.189	4.067	4.071	4.067	140-150	2.823	3081	99.9,99.9
160	3.495	3.423	3.477	3.423	3.495	3.423	3.477	3.423	150-160	1.762	3083	100,100
170	2.647	2.597	2.583	2.597	2.647	2.597	2.583	2.597	160-170	0.8645	3084	100,100
180	2.406	2.404	2.393	2.404	2.406	2.404	2.393	2.404	170-180	0.2366	3084	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 2975.3 lm

%lum = 96.5%

%lamp = 96.5%

Conical surface Flux(120deg): 3029.8 lm

%lum = 98.2%


%lamp = 98.2%

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2025-11-12

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity:65.0%
 Test Distance:8.000m [K=0.7125]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:230.1V I:0.1340A P:28.940W PF:0.9384 Freq:49.98Hz Lamp Flux:3083.8x1 lm		
Name: P5-930-30W	Type: LED	
MFR.:		

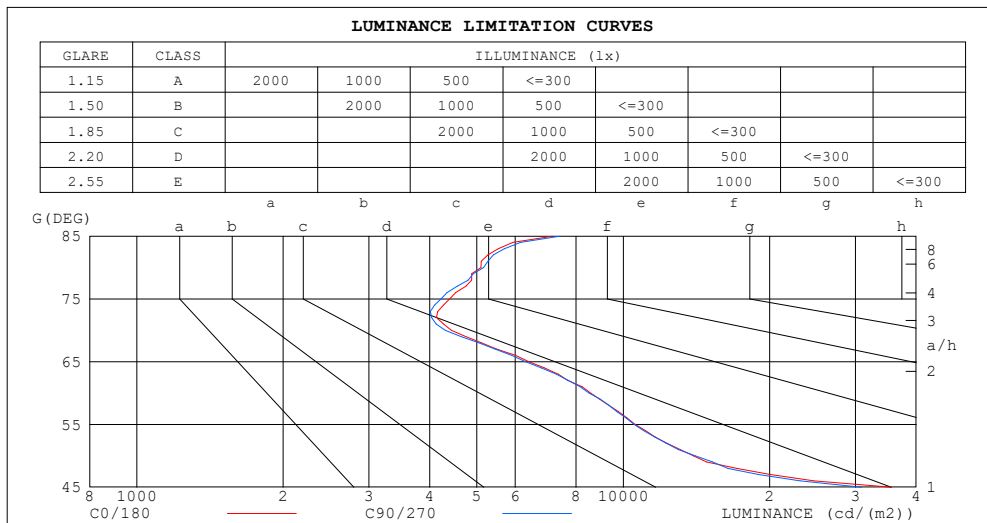

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	7144	7395
80	5095	5158
75	4396	4220
70	4435	4310
65	6396	6305
60	8573	8507
55	10584	10529
50	13935	14063
45	35597	30878


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2025-11-12

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7125]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:230.1V I:0.1340A P:28.940W PF:0.9384 Freq:49.98Hz		
Lamp Flux:3083.8x1 lm		
Name: P5-930-30W	Type: LED	
MFR.:		

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.01	1.01	1.01	.99
1.0	1.11	1.09	1.06	1.09	1.07	1.05	1.04	1.03	1.01	1.01	.99	.98	.97	.96	.95	.93
2.0	1.04	.90	.97	1.02	.98	.96	.99	.96	.93	.95	.93	.91	.93	.91	.89	.87
3.0	.97	.93	.89	.96	.92	.88	.93	.89	.87	.91	.88	.85	.88	.86	.84	.82
4.0	.91	.86	.82	.90	.85	.82	.88	.84	.81	.86	.82	.80	.84	.81	.79	.77
5.0	.86	.81	.77	.85	.80	.76	.83	.79	.76	.82	.78	.75	.80	.77	.74	.73
6.0	.82	.76	.72	.81	.75	.72	.79	.75	.71	.78	.74	.71	.76	.73	.70	.69
7.0	.77	.72	.68	.77	.71	.68	.75	.71	.67	.74	.70	.67	.73	.69	.66	.65
8.0	.73	.68	.64	.73	.68	.64	.72	.67	.64	.71	.66	.63	.70	.66	.63	.62
9.0	.70	.64	.61	.69	.64	.61	.68	.64	.60	.67	.63	.60	.67	.63	.60	.59
10.0	.67	.61	.58	.66	.61	.58	.65	.61	.57	.64	.60	.57	.64	.60	.57	.56

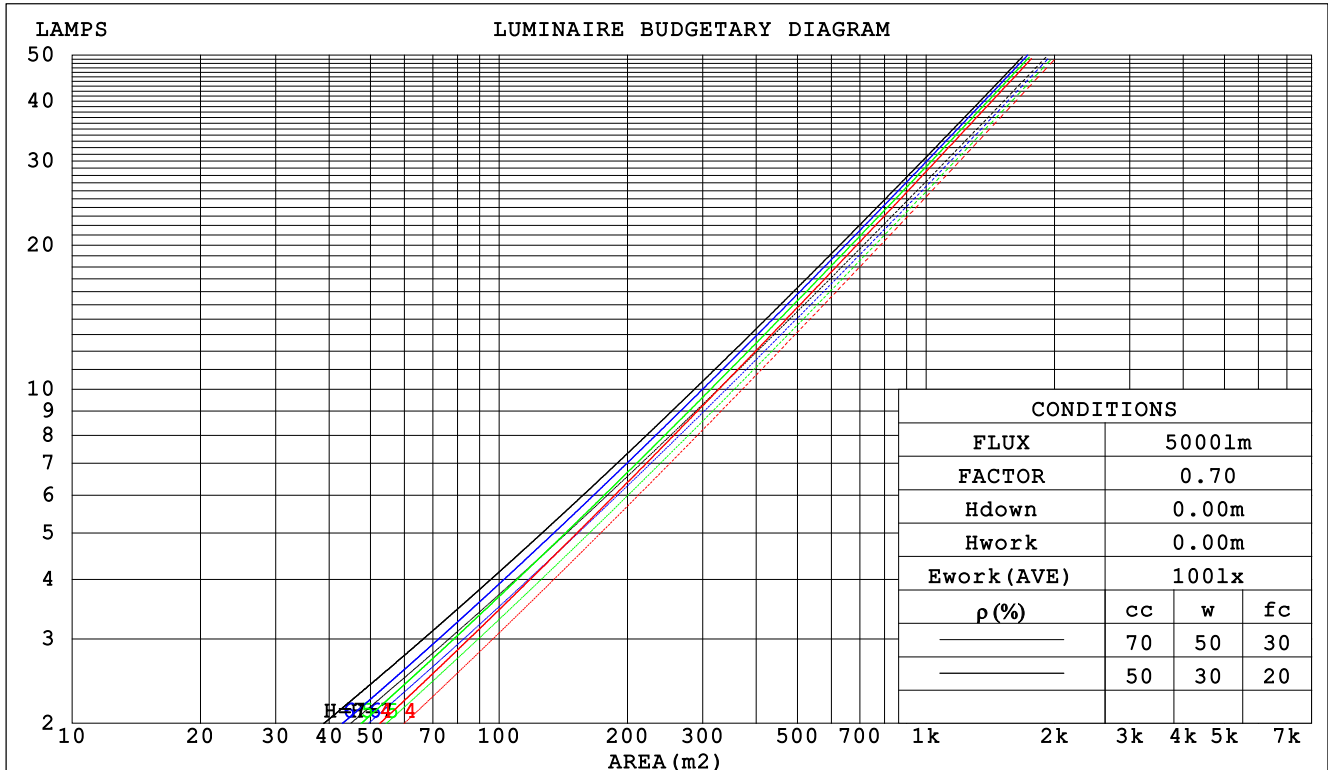

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2025-11-12

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7125]
Remarks:

WEC AND CCEC

Test:U:230.1V I:0.1340A P:28.940W PF:0.9384 Freq:49.98Hz		
Lamp Flux:3083.8x1 lm		
Name: P5-930-30W	Type: LED	
MFR.:		

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients (WEC)										
0.0																	
1.0	.171	.097	.031	.164	.093	.030	.151	.086	.028	.139	.080	.026	.128	.074	.024		
2.0	.162	.089	.027	.156	.086	.027	.145	.081	.025	.135	.076	.024	.126	.071	.022		
3.0	.154	.082	.025	.149	.080	.024	.139	.076	.023	.131	.072	.022	.123	.068	.021		
4.0	.146	.076	.022	.142	.074	.022	.133	.071	.021	.126	.068	.020	.119	.065	.020		
5.0	.139	.071	.020	.135	.069	.020	.128	.067	.020	.121	.064	.019	.115	.062	.018		
6.0	.132	.066	.019	.129	.065	.019	.123	.063	.018	.117	.061	.018	.111	.059	.017		
7.0	.126	.062	.018	.123	.061	.017	.118	.059	.017	.112	.058	.017	.108	.056	.016		
8.0	.120	.059	.017	.118	.058	.016	.113	.056	.016	.108	.055	.016	.104	.053	.016		
9.0	.115	.056	.016	.113	.055	.015	.109	.054	.015	.104	.052	.015	.100	.051	.015		
10.0	.111	.053	.015	.108	.052	.015	.104	.051	.014	.101	.050	.014	.097	.049	.014		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.198	.198	.198	.169	.169	.169	.115	.115	.115	.066	.066	.066	.021	.021	.021	
1.0	.178	.165	.153	.153	.142	.132	.104	.097	.091	.060	.056	.053	.019	.018	.017	
2.0	.163	.140	.121	.139	.121	.105	.095	.083	.073	.055	.049	.043	.018	.016	.014	
3.0	.150	.121	.098	.128	.105	.085	.088	.073	.060	.051	.042	.035	.016	.014	.012	
4.0	.139	.106	.081	.119	.092	.071	.082	.064	.050	.047	.038	.029	.015	.012	.010	
5.0	.130	.095	.069	.112	.082	.060	.077	.057	.042	.045	.034	.025	.014	.011	.008	
6.0	.122	.085	.059	.105	.074	.051	.073	.052	.036	.042	.030	.021	.014	.010	.007	
7.0	.116	.078	.051	.100	.067	.044	.069	.047	.031	.040	.028	.019	.013	.009	.006	
8.0	.110	.071	.045	.095	.062	.039	.065	.043	.028	.038	.026	.017	.012	.008	.005	
9.0	.105	.066	.040	.090	.057	.035	.062	.040	.025	.036	.024	.015	.012	.008	.005	
10.0	.100	.062	.036	.086	.053	.031	.060	.038	.022	.035	.022	.013	.011	.007	.004	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2025-11-12

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7125]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:230.1V I:0.1340A P:28.940W PF:0.9384 Freq:49.98Hz										
Lamp Flux:3083.8x1 lm										
Name: P5-930-30W					Type: LED					
MFR.:										
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	22.2	23.1	22.5	23.3	23.5	22.2	23.1	22.4	23.2	23.4
3H	22.1	22.9	22.4	23.1	23.3	22.0	22.8	22.3	23.1	23.3
4H	22.0	22.8	22.3	23.0	23.3	22.0	22.7	22.2	23.0	23.2
6H	21.9	22.7	22.3	22.9	23.2	21.9	22.6	22.2	22.9	23.1
8H	21.9	22.6	22.2	22.9	23.1	21.8	22.5	22.2	22.8	23.1
12H	21.9	22.5	22.2	22.8	23.1	21.8	22.5	22.1	22.8	23.0
4H 2H	22.0	22.8	22.3	23.0	23.2	21.9	22.7	22.2	22.9	23.2
3H	21.9	22.5	22.2	22.8	23.1	21.8	22.5	22.1	22.7	23.0
4H	21.8	22.4	22.1	22.7	23.0	21.7	22.3	22.1	22.6	23.0
6H	21.7	22.2	22.1	22.6	23.0	21.6	22.2	22.0	22.5	22.9
8H	21.7	22.2	22.1	22.5	22.9	21.6	22.1	22.0	22.5	22.9
12H	21.6	22.1	22.1	22.5	22.9	21.6	22.0	22.0	22.4	22.8
8H 4H	21.6	22.1	22.0	22.5	22.9	21.6	22.1	22.0	22.4	22.8
6H	21.6	22.0	22.0	22.4	22.8	21.5	21.9	22.0	22.3	22.8
8H	21.5	21.9	22.0	22.3	22.8	21.5	21.8	22.0	22.3	22.7
12H	21.5	21.8	22.0	22.3	22.8	21.5	21.8	22.0	22.2	22.7
12H 4H	21.6	22.0	22.0	22.4	22.8	21.5	22.0	22.0	22.4	22.8
6H	21.5	21.9	22.0	22.3	22.8	21.5	21.8	21.9	22.3	22.7
8H	21.5	21.8	22.0	22.3	22.8	21.4	21.7	21.9	22.2	22.7
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 3.2 / - 9.9					+ 3.3 / -10.0				
1.5H	+ 5.9 / - 9.1					+ 6.0 / - 9.0				
2.0H	+ 5.0 / - 1.8					+ 4.2 / - 1.6				

CIE Pub.117, 3084 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 3.9)
Area: 0.005 m2

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2025-11-12

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7125]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:230.1V I:0.1340A P:28.940W PF:0.9384 Freq:49.98Hz Lamp Flux:3083.8x1 lm		
Name: P5-930-30W	Type: LED	
MFR.:		


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	87	81	77	86	80	77	86	80	77	73
0.80	94	89	85	94	88	85	92	88	84	81
1.00	99	93	90	98	93	89	96	93	89	85
1.25	103	98	94	102	97	94	100	96	93	89
1.50	106	101	97	104	100	97	102	98	96	91
2.00	108	104	101	107	103	100	104	101	98	93
2.50	110	106	103	108	105	102	105	102	100	94
3.00	111	108	105	110	107	104	106	104	102	95
4.00	113	111	108	111	109	107	108	106	104	97
5.00	115	112	111	113	111	109	108	107	106	98
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2025-11-12

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7125]
Remarks:

ISOCANDELA DIAGRAM

Test:U:230.1V I:0.1340A P:28.940W PF:0.9384 Freq:49.98Hz Lamp Flux:3083.8x1 lm		
Name: P5-930-30W	Type: LED	
MFR.:		

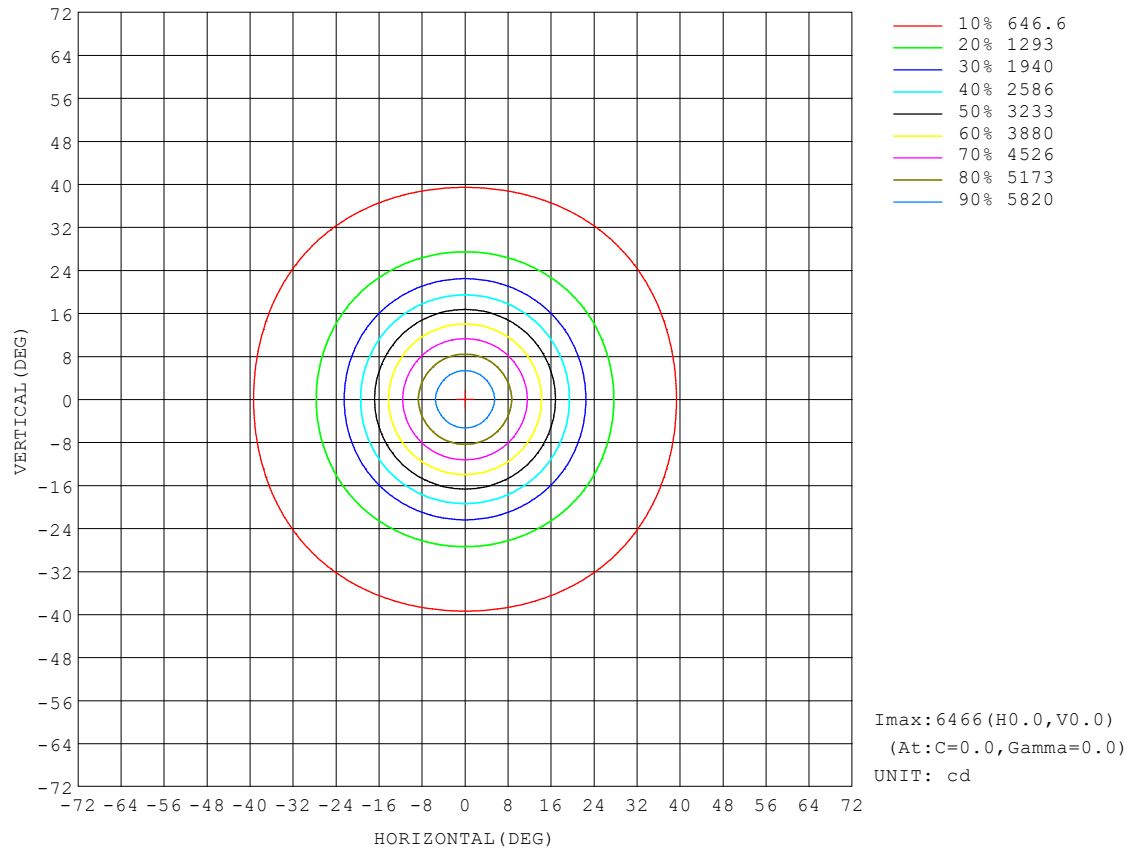


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2025-11-12

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7125]
Remarks:

AAI Figure

Test:U:230.1V I:0.1340A P:28.940W PF:0.9384 Freq:49.98Hz Lamp Flux:3083.8x1 lm		
Name: P5-930-30W	Type: LED	
MFR.:		

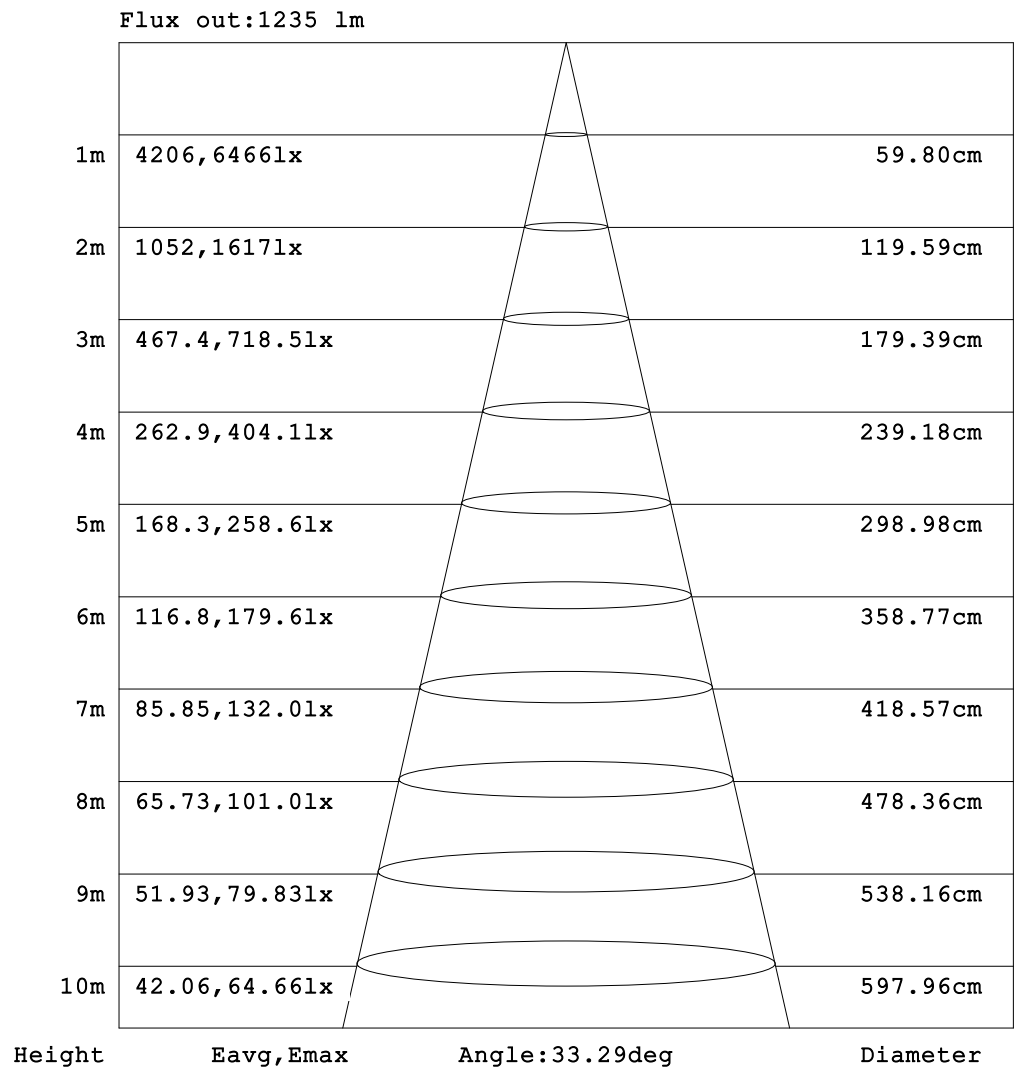


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2025-11-12

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7125]
Remarks:

ISOLUX DIAGRAM


Test:U:230.1V I:0.1340A P:28.940W PF:0.9384 Freq:49.98Hz Lamp Flux:3083.8x1 lm		
Name: P5-930-30W	Type: LED	
MFR.:		

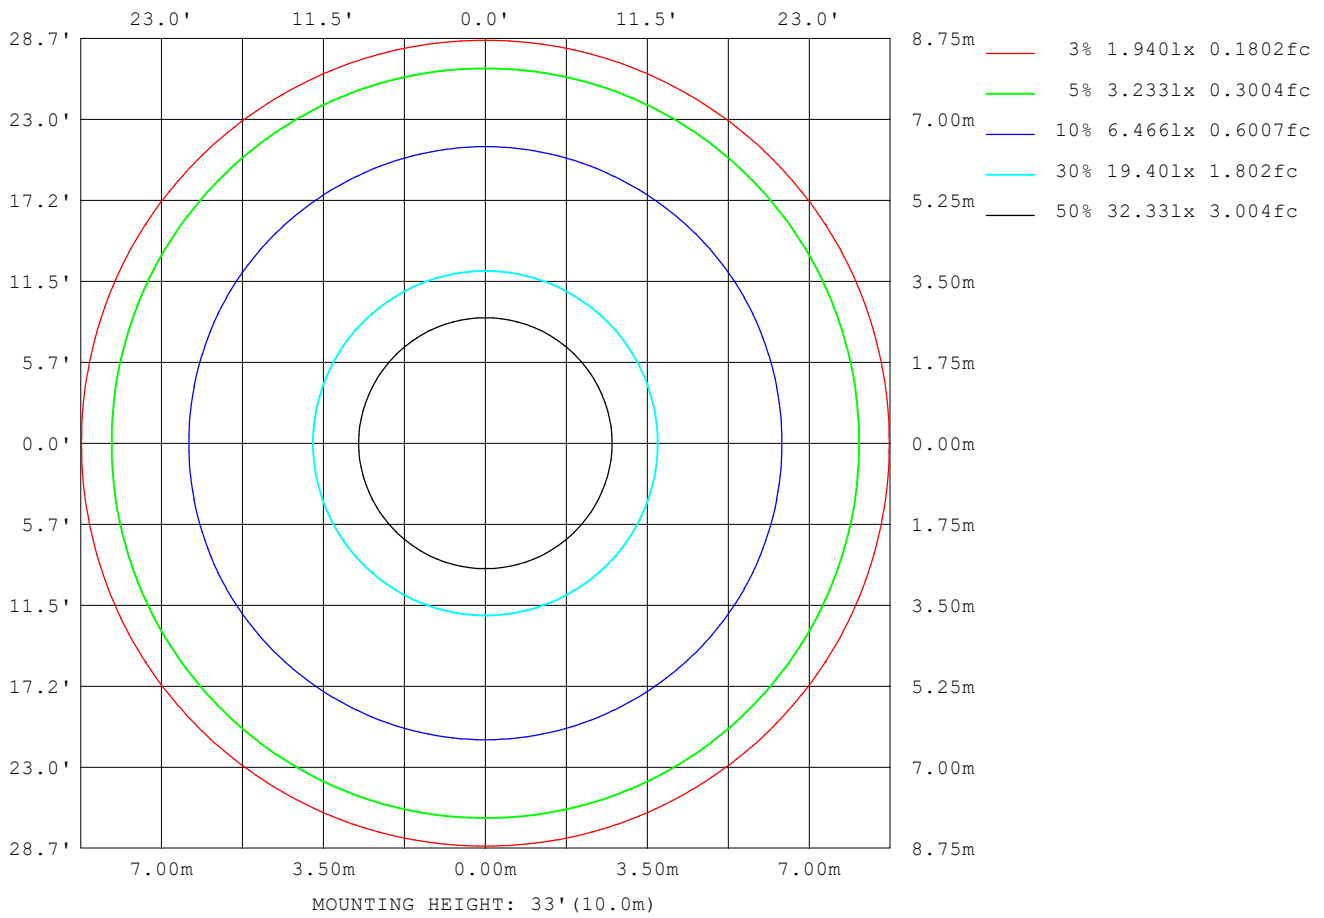

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2025-11-12

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7125]
Remarks:

Planar Illuminance Curve

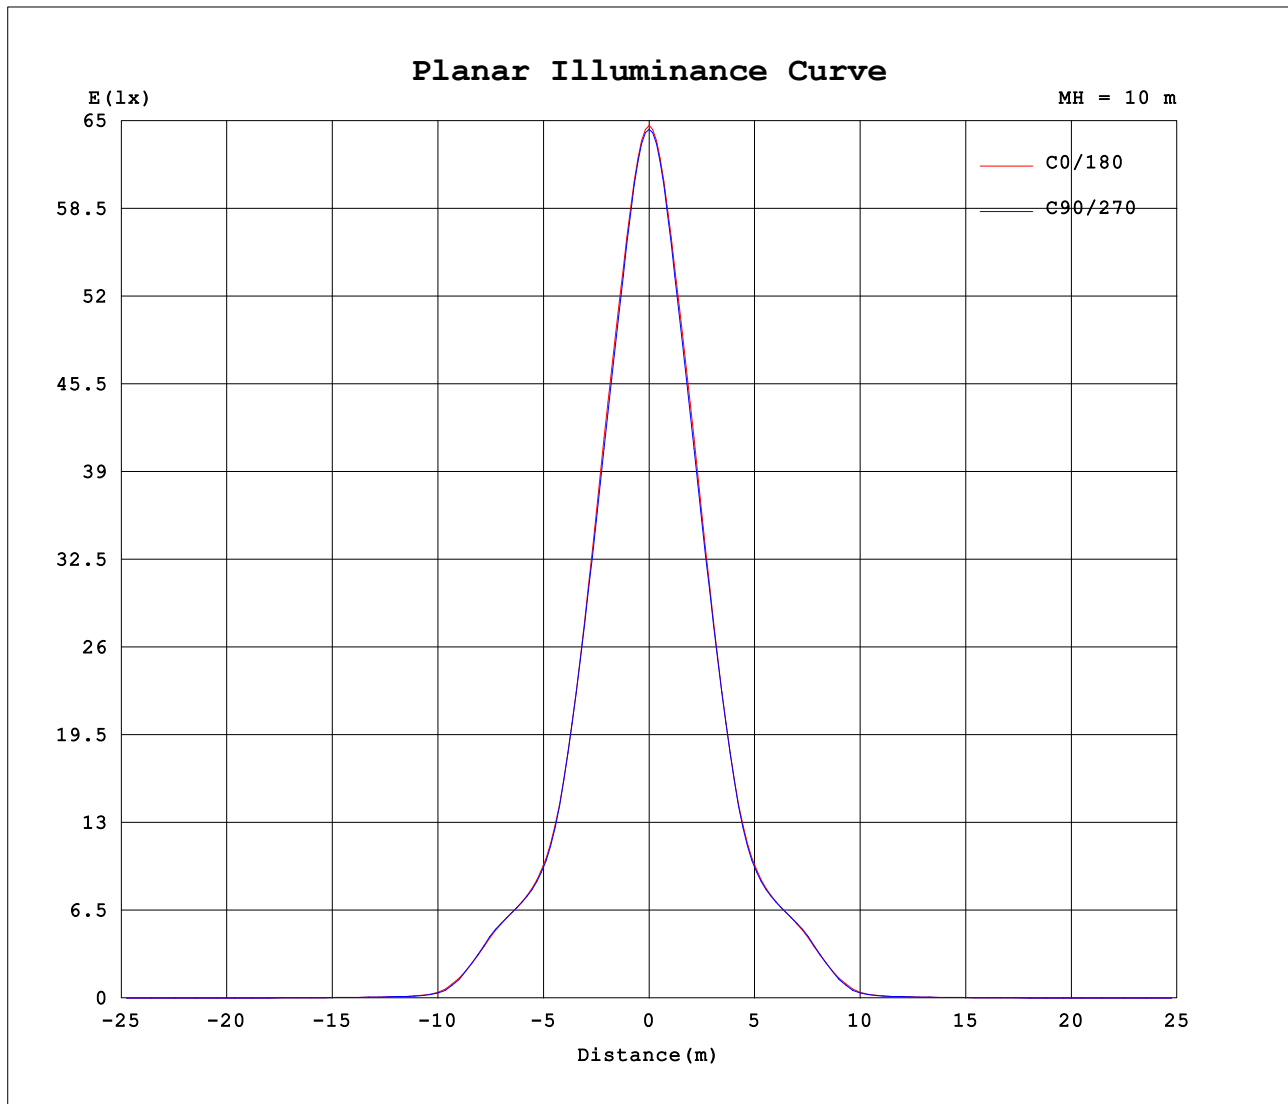

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2025-11-12

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7125]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:230.1V I:0.1340A P:28.940W PF:0.9384 Freq:49.98Hz		
Lamp Flux:3083.8x1 lm		
Name: P5-930-30W	Type: LED	
MFR.:		

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	6466	6414	6437	6436	6437	6414	6466	6414	6437	6436	6437	6414						
5	5920	5885	5885	5879	5885	5885	5920	5885	5885	5879	5885	5885						
10	4886	4856	4827	4809	4827	4856	4886	4856	4827	4809	4827	4856						
15	3692	3666	3645	3636	3645	3666	3692	3666	3645	3636	3645	3666						
20	2456	2449	2443	2451	2443	2449	2456	2449	2443	2451	2443	2449						
25	1540	1529	1518	1514	1518	1529	1540	1529	1518	1514	1518	1529						
30	1172	1170	1165	1165	1165	1170	1172	1170	1165	1165	1165	1170						
35	1004	1016	1017	1011	1017	1016	1004	1016	1017	1011	1017	1016						
40	575	582	579	576	579	582	575	582	579	576	579	582						
45	126	125	113	109	113	125	126	125	113	109	113	125						
50	44.8	44.1	44.4	45.2	44.4	44.1	44.8	44.1	44.4	45.2	44.4	44.1						
55	30.4	29.9	30.4	30.2	30.4	29.9	30.4	29.9	30.4	30.2	30.4	29.9						
60	21.4	21.2	21.5	21.3	21.5	21.2	21.4	21.2	21.5	21.3	21.5	21.2						
65	13.5	13.3	13.6	13.3	13.6	13.3	13.5	13.3	13.6	13.3	13.6	13.3						
70	7.58	7.75	7.63	7.37	7.63	7.75	7.58	7.75	7.63	7.37	7.63	7.75						
75	5.69	5.97	5.73	5.46	5.73	5.97	5.69	5.97	5.73	5.46	5.73	5.97						
80	4.42	4.48	4.55	4.48	4.55	4.48	4.42	4.48	4.55	4.48	4.55	4.48						
85	3.11	3.18	3.17	3.22	3.17	3.18	3.11	3.18	3.17	3.22	3.17	3.18						
90	3.48	3.54	3.55	3.56	3.55	3.54	3.48	3.54	3.55	3.56	3.55	3.54						
95	3.87	3.87	3.87	3.87	3.87	3.87	3.87	3.87	3.87	3.87	3.87	3.87						
100	4.22	4.22	4.21	4.21	4.21	4.22	4.22	4.22	4.21	4.21	4.21	4.22						
105	4.70	4.71	4.70	4.70	4.70	4.71	4.70	4.71	4.70	4.70	4.70	4.71						
110	5.28	5.30	5.28	5.28	5.28	5.30	5.28	5.30	5.28	5.28	5.28	5.30						
115	5.84	5.84	5.82	5.81	5.82	5.84	5.84	5.84	5.82	5.81	5.82	5.84						
120	6.20	6.16	6.15	6.13	6.15	6.16	6.20	6.16	6.15	6.13	6.15	6.16						
125	6.27	6.20	6.18	6.16	6.18	6.20	6.27	6.20	6.18	6.16	6.18	6.20						
130	6.05	5.93	5.90	5.87	5.90	5.93	6.05	5.93	5.90	5.87	5.90	5.93						
135	5.61	5.46	5.42	5.40	5.42	5.46	5.61	5.46	5.42	5.40	5.42	5.46						
140	5.08	4.93	4.89	4.88	4.89	4.93	5.08	4.93	4.89	4.88	4.89	4.93						
145	4.58	4.45	4.43	4.41	4.43	4.45	4.58	4.45	4.43	4.41	4.43	4.45						
150	4.19	4.07	4.07	4.07	4.07	4.07	4.19	4.07	4.07	4.07	4.07	4.07						
155	3.87	3.76	3.79	3.82	3.79	3.76	3.87	3.76	3.79	3.82	3.79	3.76						
160	3.49	3.40	3.44	3.48	3.44	3.40	3.49	3.40	3.44	3.48	3.44	3.40						
165	3.05	2.97	2.99	3.01	2.99	2.97	3.05	2.97	2.99	3.01	2.99	2.97						
170	2.65	2.60	2.59	2.58	2.59	2.60	2.65	2.60	2.59	2.58	2.59	2.60						
175	2.43	2.42	2.42	2.39	2.42	2.42	2.43	2.42	2.42	2.39	2.42	2.42						
180	2.41	2.40	2.41	2.39	2.41	2.40	2.41	2.40	2.41	2.39	2.41	2.40						

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2025-11-12

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7125]
Remarks: