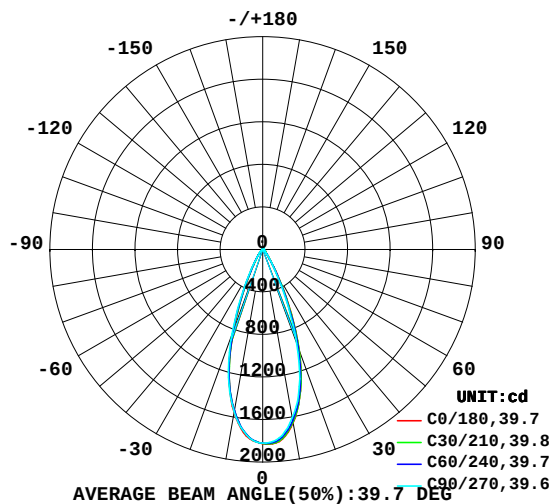
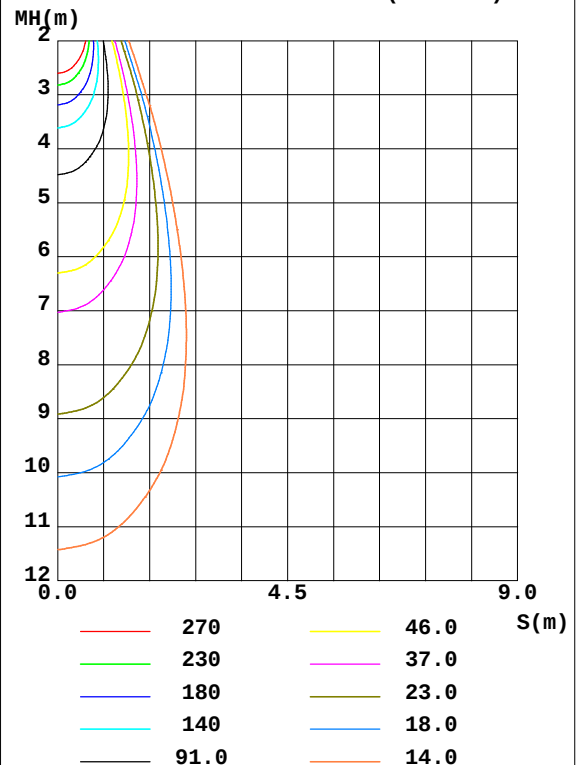


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:221.50V I:0.0520A P:10.900W PF:0.9450 Freq:50.00Hz		
Lamp Flux:904.257x1 lm		
Name: PU-TL-HM10	Type: LED	
MFR.:		

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 82.96 lm/W
MODEL		I _{max} (cd)	1833	S/MH(C0/180)		0.59
NOMINAL POWER(W)	10	LOR(%)	100.0	S/MH(C90/270)		0.61
RATED VOLTAGE(V)	220	TOTAL FLUX(lm)	904.26	η UP, DN(C0-180)		1.4, 46.4
NOMINAL FLUX(lm)	904.257	CIE CLASS	DIRECT	η UP, DN(C180-360)		1.6, 50.6
LAMPS INSIDE	1	η up(%)	3.0	CIBSE SHR NOM		0.50
TEST VOLTAGE(V)	220.7	η down(%)	97.0	CIBSE SHR MAX		0.65

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

C0 PLANE ISOLUX DIAGRAM (UNIT: lx)


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-09-09

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE G0-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	1556	1540	1549	1604	1655	1640	1607	1582	0- 10	163.5	163.5	18.1,18.1
20	795.7	808.3	845.8	933.7	1008	991.0	939.6	876.0	10- 20	352.4	515.9	57.1,57.1
30	193.6	197.2	211.5	246.6	277.1	271.7	252.6	226.9	20- 30	232.6	748.5	82.8,82.8
40	58.14	57.87	59.85	66.00	71.68	71.67	69.14	64.58	30- 40	76.91	825.4	91.3,91.3
50	21.65	21.56	22.61	25.87	28.73	28.04	26.18	24.13	40- 50	32.14	857.6	94.8,94.8
60	7.057	6.840	7.037	8.007	8.882	8.600	8.008	7.541	50- 60	12.46	870.1	96.2,96.2
70	1.512	1.460	1.714	2.541	3.201	3.202	2.796	2.242	60- 70	4.782	874.8	96.7,96.7
80	0.2125	0.1237	0.2401	0.7178	1.191	1.289	1.175	0.7987	70- 80	1.064	875.9	96.9,96.9
90	0.2416	0.1035	0.2265	0.8049	1.387	1.523	1.402	0.9523	80- 90	0.8310	876.7	97,97
100	0.6430	0.4910	0.5989	1.158	1.725	1.859	1.745	1.319	90-100	1.090	877.8	97.1,97.1
110	1.379	1.235	1.326	1.825	2.331	2.452	2.353	1.977	100-110	1.586	879.4	97.3,97.3
120	2.649	2.507	2.542	2.879	3.232	3.328	3.278	3.038	110-120	2.332	881.7	97.5,97.5
130	4.558	4.421	4.386	4.514	4.668	4.729	4.738	4.676	120-130	3.315	885.1	97.9,97.9
140	7.007	6.843	6.743	6.742	6.769	6.750	6.756	6.852	130-140	4.352	889.4	98.4,98.4
150	9.958	9.723	9.558	9.502	9.467	9.322	9.264	9.511	140-150	5.073	894.5	98.9,98.9
160	12.32	12.13	12.03	12.10	12.16	11.93	11.75	11.93	150-160	4.996	899.5	99.5,99.5
170	12.95	12.86	12.82	12.92	12.98	12.76	12.56	12.67	160-170	3.547	903.0	99.9,99.9
180	13.49	13.28	13.21	13.39	13.56	13.38	13.19	13.27	170-180	1.236	904.3	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT: lm		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-09-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:221.50V I:0.0520A P:10.900W PF:0.9450 Freq:50.00Hz Lamp Flux:904.257x1 lm		
Name: PU-TL-HM10	Type: LED	
MFR.:		

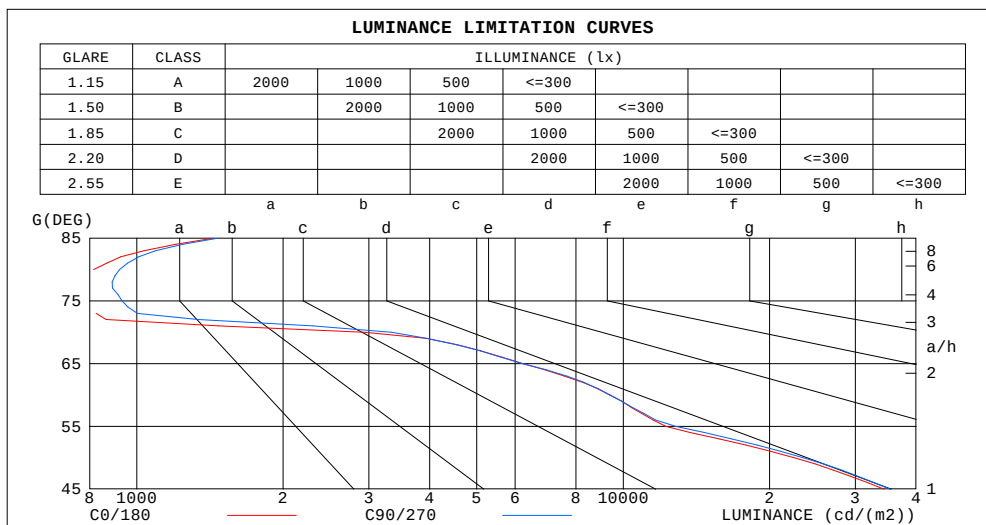

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	1436	1467
80	816	922
75	784	933
70	2948	3341
65	6228	6212
60	9410	9383
55	12237	12834
50	22458	23454
45	34344	35378


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-09-09

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE G0-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:221.50V I:0.0520A P:10.900W PF:0.9450 Freq:50.00Hz		
Lamp Flux:904.257x1 lm		
Name: PU-TL-HM10	Type: LED	
MFR.:		

ρ_{CC}	80%			70%			50%			30%			10%			0
ρ_W	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.18	1.18	1.18	1.15	1.15	1.15	1.09	1.09	1.09	1.04	1.04	1.04	.99	.99	.99	.97
1.0	1.11	1.08	1.06	1.08	1.06	1.04	1.04	1.02	1.01	.99	.98	.97	.96	.95	.94	.92
2.0	1.04	1.00	.97	1.02	.99	.96	.98	.96	.93	.95	.93	.91	.92	.90	.89	.87
3.0	.98	.93	.90	.96	.92	.89	.93	.90	.87	.91	.88	.86	.88	.86	.84	.82
4.0	.93	.88	.84	.91	.87	.83	.89	.85	.82	.87	.83	.81	.84	.82	.80	.78
5.0	.88	.83	.79	.87	.82	.78	.85	.81	.77	.83	.79	.76	.81	.78	.76	.74
6.0	.83	.78	.74	.83	.78	.74	.81	.77	.73	.79	.75	.73	.78	.74	.72	.71
7.0	.79	.74	.71	.79	.74	.70	.77	.73	.70	.76	.72	.69	.75	.71	.69	.67
8.0	.76	.71	.67	.75	.70	.67	.74	.70	.66	.73	.69	.66	.72	.68	.66	.64
9.0	.73	.67	.64	.72	.67	.64	.71	.67	.63	.70	.66	.63	.69	.65	.63	.62
10.0	.70	.65	.61	.69	.64	.61	.68	.64	.61	.67	.63	.60	.66	.63	.60	.59

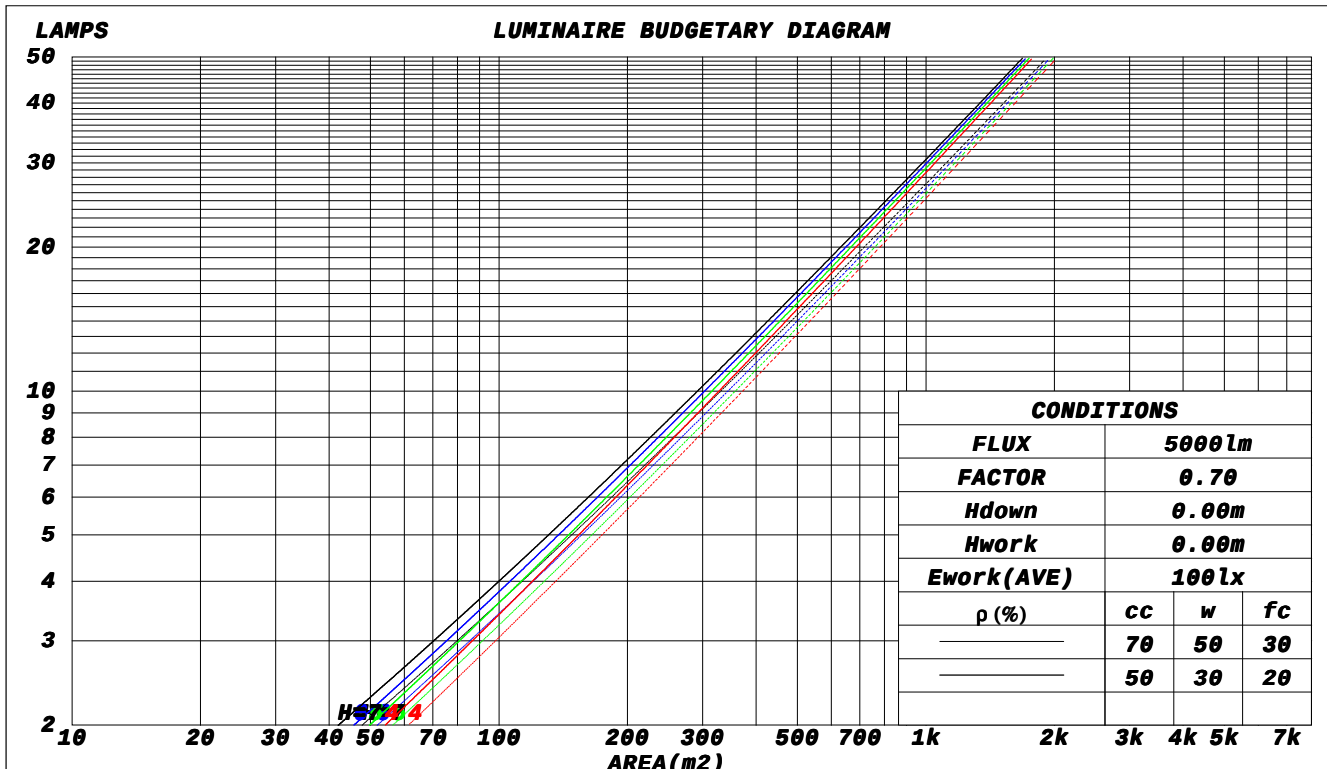

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-09-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE G0-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

WEC AND CCEC

Test:U:221.50V I:0.0520A P:10.900W PF:0.9450 Freq:50.00Hz		
Lamp Flux:904.257x1 lm		
Name: PU-TL-HM10	Type: LED	
MFR.:		

ρ_{CC}	80%			70%			50%			30%			10%			0	
ρ_W	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
ρ_{fc}	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.164	.093	.030	.157	.089	.028	.143	.082	.026	.129	.075	.024	.117	.068	.022		
2.0	.155	.085	.026	.149	.082	.025	.136	.076	.024	.125	.070	.022	.115	.065	.021		
3.0	.146	.078	.023	.141	.075	.023	.130	.071	.021	.121	.066	.020	.112	.062	.019		
4.0	.138	.072	.021	.133	.070	.021	.124	.066	.020	.116	.062	.019	.108	.059	.018		
5.0	.131	.067	.019	.127	.065	.019	.119	.062	.018	.112	.059	.018	.105	.056	.017		
6.0	.124	.062	.018	.121	.061	.018	.114	.058	.017	.107	.056	.016	.101	.053	.016		
7.0	.119	.059	.017	.115	.057	.016	.109	.055	.016	.103	.053	.015	.098	.051	.015		
8.0	.113	.055	.016	.110	.054	.015	.105	.052	.015	.100	.050	.015	.095	.049	.014		
9.0	.108	.052	.015	.106	.052	.014	.101	.050	.014	.096	.048	.014	.092	.047	.013		
10.0	.104	.050	.014	.101	.049	.014	.097	.047	.013	.093	.046	.013	.089	.045	.013		

ρ_{CC}	80%			70%			50%			30%			10%			0
ρ_W	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.214	.214	.214	.183	.183	.183	.125	.125	.125	.072	.072	.072	.023	.023	.023	
1.0	.194	.181	.169	.166	.155	.146	.113	.107	.101	.065	.062	.059	.021	.020	.019	
2.0	.178	.156	.138	.152	.134	.119	.104	.093	.083	.060	.054	.049	.019	.017	.016	
3.0	.164	.137	.115	.141	.118	.100	.097	.082	.070	.056	.048	.041	.018	.016	.014	
4.0	.153	.122	.099	.132	.106	.086	.090	.074	.060	.052	.043	.036	.017	.014	.012	
5.0	.144	.110	.086	.124	.096	.075	.085	.067	.053	.049	.039	.031	.016	.013	.010	
6.0	.136	.101	.076	.117	.087	.066	.081	.061	.047	.047	.036	.028	.015	.012	.009	
7.0	.129	.093	.068	.111	.081	.059	.077	.057	.042	.045	.033	.025	.014	.011	.008	
8.0	.123	.087	.062	.106	.075	.054	.073	.053	.038	.043	.031	.023	.014	.010	.008	
9.0	.118	.082	.057	.101	.071	.050	.070	.050	.035	.041	.029	.021	.013	.010	.007	
10.0	.113	.077	.053	.098	.067	.046	.068	.047	.033	.039	.028	.020	.013	.009	.007	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-09-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:221.50V I:0.0520A P:10.900W PF:0.9450 Freq:50.00Hz										
Lamp Flux:904.257x1 lm										
Name: PU-TL-HM10					Type: LED					
MFR.:										
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	16.8	17.6	17.1	17.8	18.1	17.0	17.8	17.3	18.0	18.2
3H	16.7	17.5	17.0	17.7	18.0	16.9	17.7	17.2	17.9	18.1
4H	16.6	17.4	17.0	17.6	17.9	16.8	17.5	17.1	17.8	18.1
6H	16.6	17.2	16.9	17.5	17.8	16.7	17.4	17.1	17.7	18.0
8H	16.5	17.1	16.9	17.4	17.8	16.7	17.3	17.0	17.6	17.9
12H	16.5	17.1	16.8	17.4	17.7	16.6	17.2	17.0	17.6	17.9
4H 2H	16.7	17.4	17.0	17.6	17.9	16.8	17.5	17.2	17.8	18.1
3H	16.6	17.2	16.9	17.5	17.8	16.7	17.4	17.1	17.7	18.0
4H	16.5	17.0	16.9	17.4	17.7	16.6	17.2	17.0	17.5	17.9
6H	16.4	16.9	16.8	17.2	17.7	16.5	17.0	17.0	17.4	17.8
8H	16.3	16.8	16.8	17.2	17.6	16.5	16.9	16.9	17.3	17.8
12H	16.3	16.7	16.7	17.1	17.6	16.4	16.8	16.9	17.3	17.7
8H 4H	16.3	16.8	16.8	17.2	17.6	16.5	16.9	16.9	17.3	17.8
6H	16.2	16.6	16.7	17.0	17.5	16.4	16.7	16.8	17.2	17.7
8H	16.1	16.5	16.6	16.9	17.5	16.3	16.6	16.8	17.1	17.6
12H	16.1	16.4	16.6	16.9	17.4	16.3	16.5	16.8	17.0	17.6
12H 4H	16.3	16.7	16.7	17.1	17.6	16.4	16.8	16.9	17.3	17.7
6H	16.1	16.5	16.6	16.9	17.4	16.3	16.6	16.8	17.1	17.6
8H	16.1	16.4	16.6	16.9	17.4	16.3	16.5	16.8	17.0	17.6
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 2.3 / - 4.9					+ 2.4 / - 5.0				
1.5H	+ 3.3 / - 4.6					+ 3.4 / - 4.6				
2.0H	+ 4.3 / - 4.3					+ 4.4 / - 4.4				

CIE Pub.117, 904.3 lm Total Lamp Luminous Flux Corrected ($8\log(F/F_0) = -0.3$)
Area: 0.0015 m²

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-09-09

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:221.50V I:0.0520A P:10.900W PF:0.9450 Freq:50.00Hz Lamp Flux:904.257x1 lm		
Name: PU-TL-HM10	Type: LED	
MFR.:		


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	86	80	76	85	79	76	85	79	76	72
0.80	94	88	84	93	87	84	91	86	83	79
1.00	98	92	89	97	92	88	95	91	88	83
1.25	102	97	93	101	96	93	98	95	92	87
1.50	105	100	97	103	99	96	101	97	94	89
2.00	107	103	100	106	102	99	103	100	97	91
2.50	109	105	102	107	104	101	104	101	99	92
3.00	111	107	104	109	106	103	105	103	101	93
4.00	113	110	108	111	108	106	106	105	103	95
5.00	114	112	110	112	110	108	107	106	104	96
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-09-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

ISOCANDELA DIAGRAM

Test:U:221.50V I:0.0520A P:10.900W PF:0.9450 Freq:50.00Hz Lamp Flux:904.257x1 lm		
Name: PU-TL-HM10	Type: LED	
MFR.:		

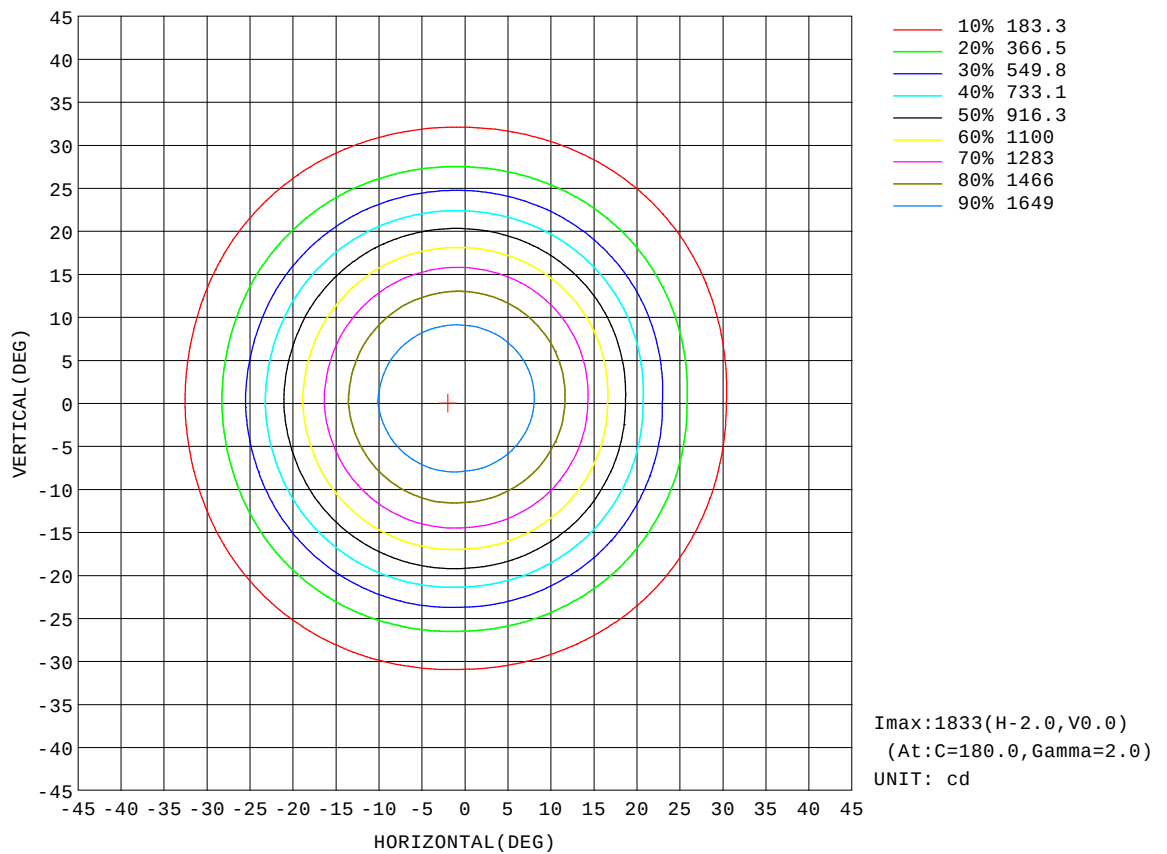


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-09-09

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

AAI Figure

Test:U:221.50V I:0.0520A P:10.900W PF:0.9450 Freq:50.00Hz Lamp Flux:904.257x1 lm		
Name: PU-TL-HM10	Type: LED	
MFR.:		

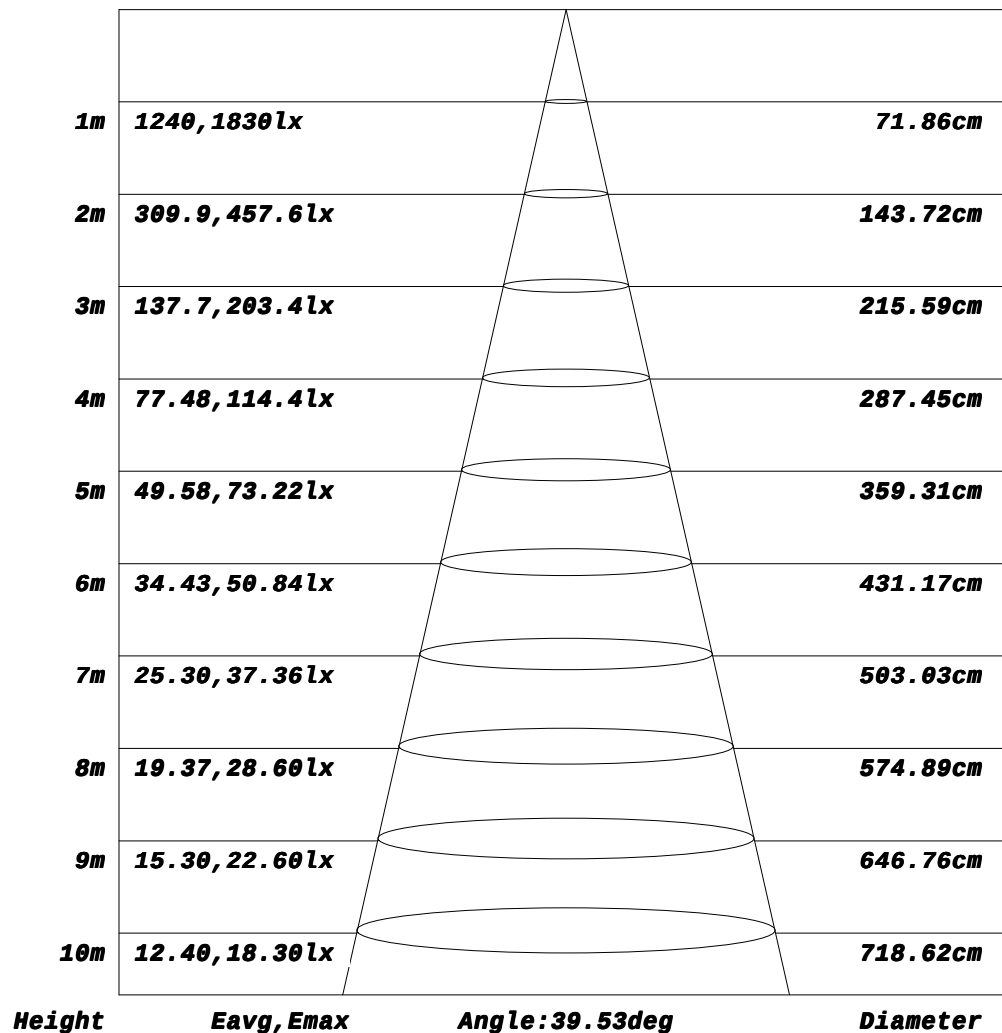Flux out:515.9 lm


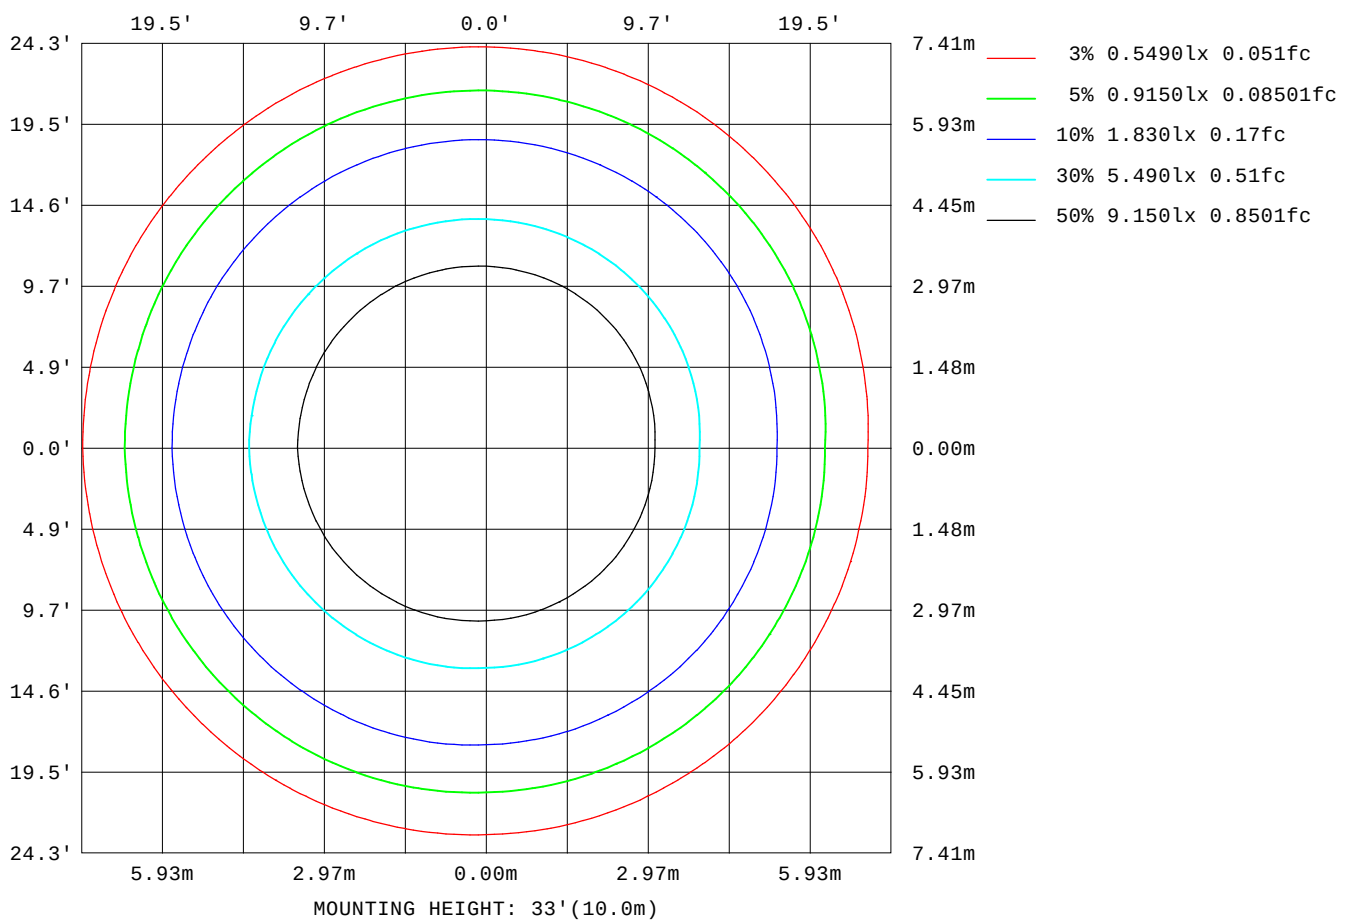
Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-09-09

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE G0-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

ISOLUX DIAGRAM


Test:U:221.50V I:0.0520A P:10.900W PF:0.9450 Freq:50.00Hz Lamp Flux:904.257x1 lm		
Name: PU-TL-HM10	Type: LED	
MFR.:		



C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-09-09

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE G0-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

Planar Illuminance Curve

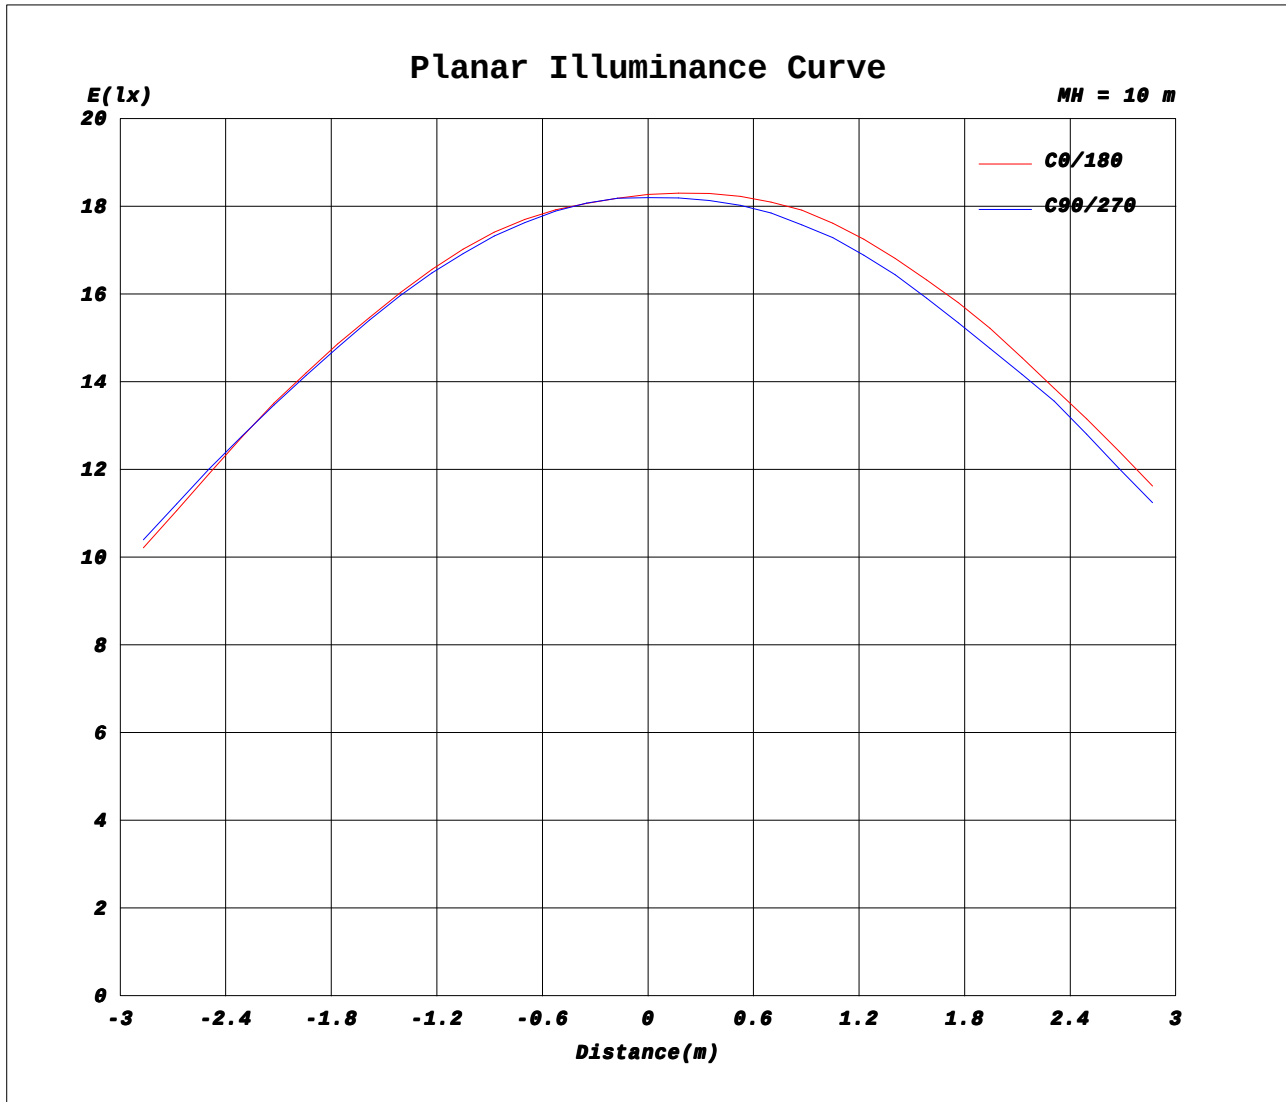

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-09-09

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE G0-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:221.50V I:0.0520A P:10.900W PF:0.9450 Freq:50.00Hz Lamp Flux:904.257x1 lm																	
Name: PU-TL-HM10									Type: LED								
MFR.:																	

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	1827	1823	1821	1820	1822	1825	1827	1825	1822	1820	1821	1823						
5	1761	1751	1748	1752	1773	1795	1812	1806	1793	1779	1771	1765						
10	1556	1541	1538	1549	1585	1623	1655	1649	1631	1607	1590	1573						
15	1228	1221	1226	1244	1290	1338	1378	1377	1361	1334	1306	1270						
20	796	800	817	846	905	963	1008	1003	979	940	900	852						
25	415	418	431	454	502	550	587	582	562	530	498	460						
30	194	194	200	212	235	258	277	276	267	253	237	217						
35	98.8	98.7	101	104	112	120	127	128	127	123	117	109						
40	58.1	57.6	58.2	59.9	63.9	68.1	71.7	72.1	71.2	69.1	66.4	62.7						
45	36.4	36.1	36.4	37.5	40.2	43.0	45.2	45.3	44.4	42.9	41.2	39.0						
50	21.7	21.4	21.7	22.6	24.8	27.0	28.7	28.5	27.6	26.2	24.9	23.4						
55	10.5	10.3	10.4	11.0	12.6	14.2	15.5	15.3	14.6	13.5	12.6	11.6						
60	7.06	6.84	6.84	7.04	7.67	8.34	8.88	8.76	8.44	8.01	7.70	7.38						
65	3.95	3.73	3.73	3.94	4.59	5.30	5.87	5.79	5.50	5.09	4.75	4.37						
70	1.51	1.43	1.49	1.71	2.26	2.83	3.29	3.29	3.11	2.80	2.46	2.03						
75	0.30	0.24	0.26	0.36	0.63	0.91	1.16	1.24	1.22	1.12	0.93	0.66						
80	0.21	0.12	0.13	0.24	0.55	0.89	1.19	1.29	1.29	1.17	0.96	0.64						
85	0.19	0.07	0.07	0.19	0.54	0.93	1.28	1.40	1.40	1.28	1.04	0.67						
90	0.24	0.11	0.10	0.23	0.60	1.01	1.39	1.52	1.53	1.40	1.15	0.76						
95	0.40	0.26	0.25	0.37	0.75	1.17	1.55	1.68	1.69	1.56	1.31	0.92						
100	0.64	0.50	0.48	0.60	0.96	1.36	1.72	1.86	1.86	1.75	1.50	1.14						
105	0.97	0.83	0.81	0.92	1.25	1.64	1.98	2.11	2.12	2.01	1.78	1.44						
110	1.38	1.24	1.23	1.33	1.64	2.00	2.33	2.45	2.46	2.35	2.14	1.81						
115	1.93	1.80	1.78	1.86	2.14	2.46	2.75	2.85	2.85	2.76	2.58	2.30						
120	2.65	2.52	2.49	2.54	2.75	3.00	3.23	3.32	3.34	3.28	3.14	2.93						
125	3.52	3.41	3.36	3.39	3.54	3.71	3.88	3.95	3.97	3.94	3.85	3.71						
130	4.56	4.45	4.39	4.39	4.46	4.56	4.67	4.72	4.74	4.74	4.71	4.65						
135	5.70	5.60	5.54	5.51	5.53	5.58	5.63	5.65	5.67	5.68	5.69	5.70						
140	7.01	6.89	6.80	6.74	6.74	6.75	6.77	6.75	6.75	6.76	6.81	6.89						
145	8.45	8.29	8.18	8.09	8.06	8.05	8.04	7.99	7.94	7.95	8.05	8.21						
150	9.96	9.79	9.66	9.56	9.51	9.49	9.47	9.36	9.28	9.26	9.40	9.63						
155	11.4	11.2	11.0	10.9	10.9	10.9	10.9	10.8	10.7	10.6	10.7	11.0						
160	12.3	12.2	12.1	12.0	12.1	12.1	12.2	12.0	11.9	11.8	11.8	12.0						
165	12.8	12.7	12.6	12.6	12.7	12.8	12.8	12.7	12.5	12.4	12.4	12.5						
170	13.0	12.9	12.8	12.8	12.9	12.9	13.0	12.8	12.7	12.6	12.6	12.7						
175	13.3	13.2	13.1	13.1	13.1	13.1	13.1	13.0	12.8	12.8	12.8	13.0						
180	13.5	13.3	13.2	13.2	13.3	13.5	13.6	13.4	13.3	13.2	13.2	13.3						

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-09-09

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE G0-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks: