



LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:220.2V I:0.1280A P:26.841W PF:0.9522 Freq:50.02Hz		
Lamp Flux:4061.92x1 lm		
Name: PU-TL-P3-025-30D	Type: LED	
MFR.:		

DATA OF LAMP		PHOTOMETRIC DATA Eff: 151.33 lm/W			
MODEL		I _{max} (cd)	10246	S/MH(C0/180)	0.50
NOMINAL POWER(W)	27	LOR(%)	100.0	S/MH(C90/270)	0.52
RATED VOLTAGE(V)	220	TOTAL FLUX(lm)	4061.9	η UP,DN(C0-180)	0.3,51.7
NOMINAL FLUX(lm)	4061.92	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.7,47.2
LAMPS INSIDE	1	η up(%)	1.0	CIBSE SHR NOM	0.50
TEST VOLTAGE(V)	220	η down(%)	99.0	CIBSE SHR MAX	0.50

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

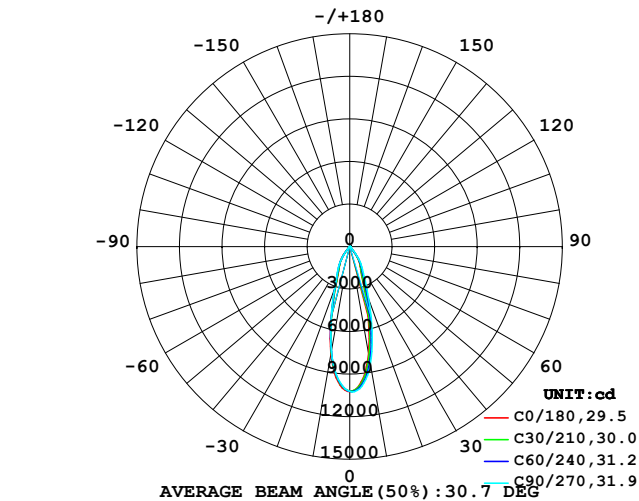

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

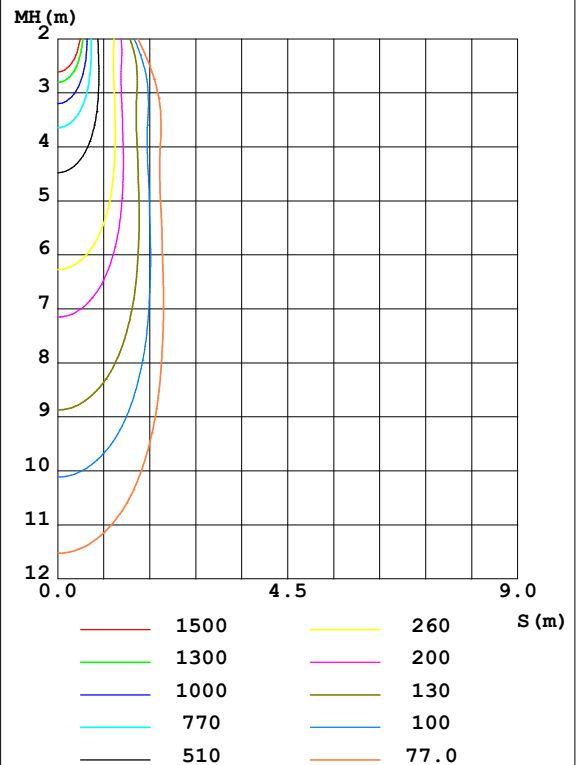

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2025-12-08

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7125]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	767.0	805.1	843.0	805.1	767.0	753.5	749.1	753.5	0- 10	858.4	858.4	21.1,21.1
20	291.1	333.5	393.5	333.5	291.1	298.9	314.7	298.9	10- 20	1445	2303	56.7,56.7
30	144.8	157.5	178.3	157.5	144.8	147.1	154.0	147.1	20- 30	980.3	3284	80.8,80.8
40	43.12	47.97	57.29	47.97	43.12	34.57	29.94	34.57	30- 40	611.6	3895	95.9,95.9
50	2.907	2.181	3.279	2.181	2.907	2.247	2.632	2.247	40- 50	92.21	3987	98.2,98.2
60	1.418	0.8878	1.095	0.8878	1.418	1.086	1.134	1.086	50- 60	14.52	4002	98.5,98.5
70	0.6833	0.4090	0.4483	0.4090	0.6833	0.7139	0.7129	0.7139	60- 70	7.835	4010	98.7,98.7
80	0.4855	0.2093	0.2195	0.2093	0.4855	0.7828	0.7763	0.7828	70- 80	5.480	4015	98.8,98.8
90	0.4656	0.0715	0.0694	0.0715	0.4656	0.8877	0.8932	0.8877	80- 90	5.155	4020	99,99
100	0.5757	0.1481	0.1459	0.1481	0.5757	1.005	1.012	1.005	90-100	5.769	4026	99.1,99.1
110	0.7225	0.2979	0.2883	0.2979	0.7225	1.149	1.154	1.149	100-110	6.791	4033	99.3,99.3
120	0.8985	0.4535	0.4401	0.4535	0.8985	1.293	1.271	1.293	110-120	8.017	4041	99.5,99.5
130	0.8742	0.4929	0.4882	0.4929	0.8742	1.160	1.131	1.160	120-130	7.819	4049	99.7,99.7
140	0.6872	0.4566	0.4601	0.4566	0.6872	0.8371	0.8291	0.8371	130-140	5.786	4055	99.8,99.8
150	0.5491	0.4427	0.4475	0.4427	0.5491	0.6199	0.6224	0.6199	140-150	3.699	4058	99.9,99.9
160	0.4587	0.4033	0.4115	0.4033	0.4587	0.4778	0.4809	0.4778	150-160	2.295	4060	100,100
170	0.3455	0.3318	0.3304	0.3318	0.3455	0.3419	0.3324	0.3419	160-170	1.117	4062	100,100
180	0.2985	0.2991	0.2978	0.2991	0.2985	0.2992	0.2975	0.2992	170-180	0.3024	4062	100,100
DEG	LUMINOUS INTENSITY:×10cd									UNIT:lm		

Conical surface Flux(90deg): 3971.8 lm

%lum = 97.8%

%lamp = 97.8%

Conical surface Flux(120deg): 4001.9 lm

%lum = 98.5%


%lamp = 98.5%

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2025-12-08

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7125]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:220.2V I:0.1280A P:26.841W PF:0.9522 Freq:50.02Hz		
Lamp Flux:4061.92x1 lm		
Name: PU-TL-P3-025-30D	Type: LED	
MFR.:		

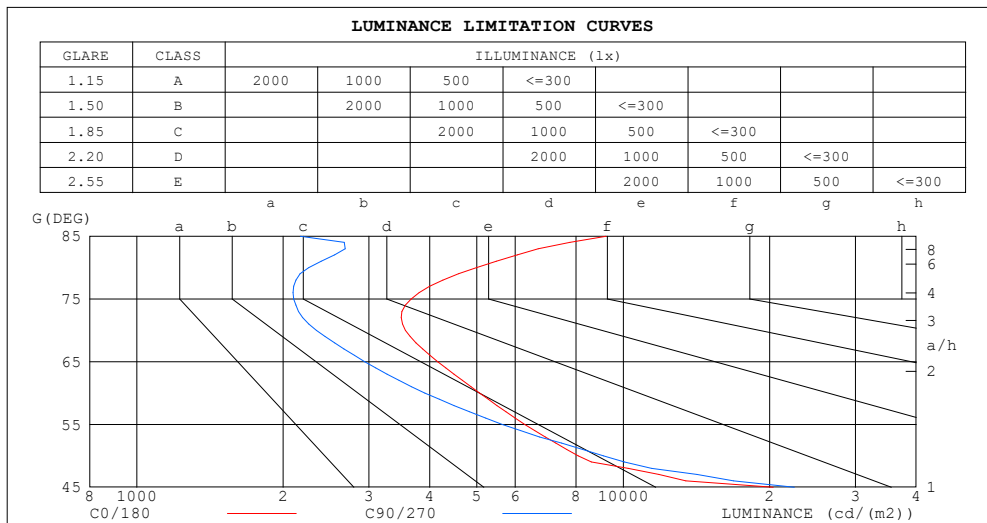

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	9214	2170
80	4993	2258
75	3667	2103
70	3568	2341
65	4157	2944
60	5066	3910
55	6276	5646
50	8077	9109
45	20346	22471


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2025-12-08

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7125]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:220.2V I:0.1280A P:26.841W PF:0.9522 Freq:50.02Hz		
Lamp Flux:4061.92x1 lm		
Name: PU-TL-P3-025-30D	Type: LED	
MFR.:		

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Coefficients of Utilization(CU)												
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.01	1.01	1.01	.99
1.0	1.11	1.09	1.07	1.09	1.07	1.05	1.05	1.03	1.02	1.01	.99	.99	.98	.97	.96	.94
2.0	1.05	1.01	.98	1.03	.99	.97	.99	.97	.95	.97	.94	.93	.94	.92	.91	.89
3.0	.99	.95	.91	.97	.94	.90	.95	.91	.89	.92	.90	.87	.90	.88	.86	.84
4.0	.94	.89	.85	.92	.88	.85	.90	.87	.84	.88	.85	.82	.86	.84	.81	.80
5.0	.89	.84	.80	.88	.83	.80	.86	.82	.79	.84	.81	.78	.83	.80	.77	.76
6.0	.85	.79	.76	.84	.79	.75	.82	.78	.75	.81	.77	.74	.79	.76	.74	.72
7.0	.81	.75	.72	.80	.75	.72	.79	.74	.71	.77	.74	.71	.76	.73	.70	.69
8.0	.77	.72	.68	.76	.72	.68	.75	.71	.68	.74	.70	.68	.73	.70	.67	.66
9.0	.74	.69	.65	.73	.68	.65	.72	.68	.65	.71	.67	.65	.71	.67	.64	.63
10.0	.71	.66	.62	.70	.65	.62	.69	.65	.62	.69	.65	.62	.68	.64	.62	.61

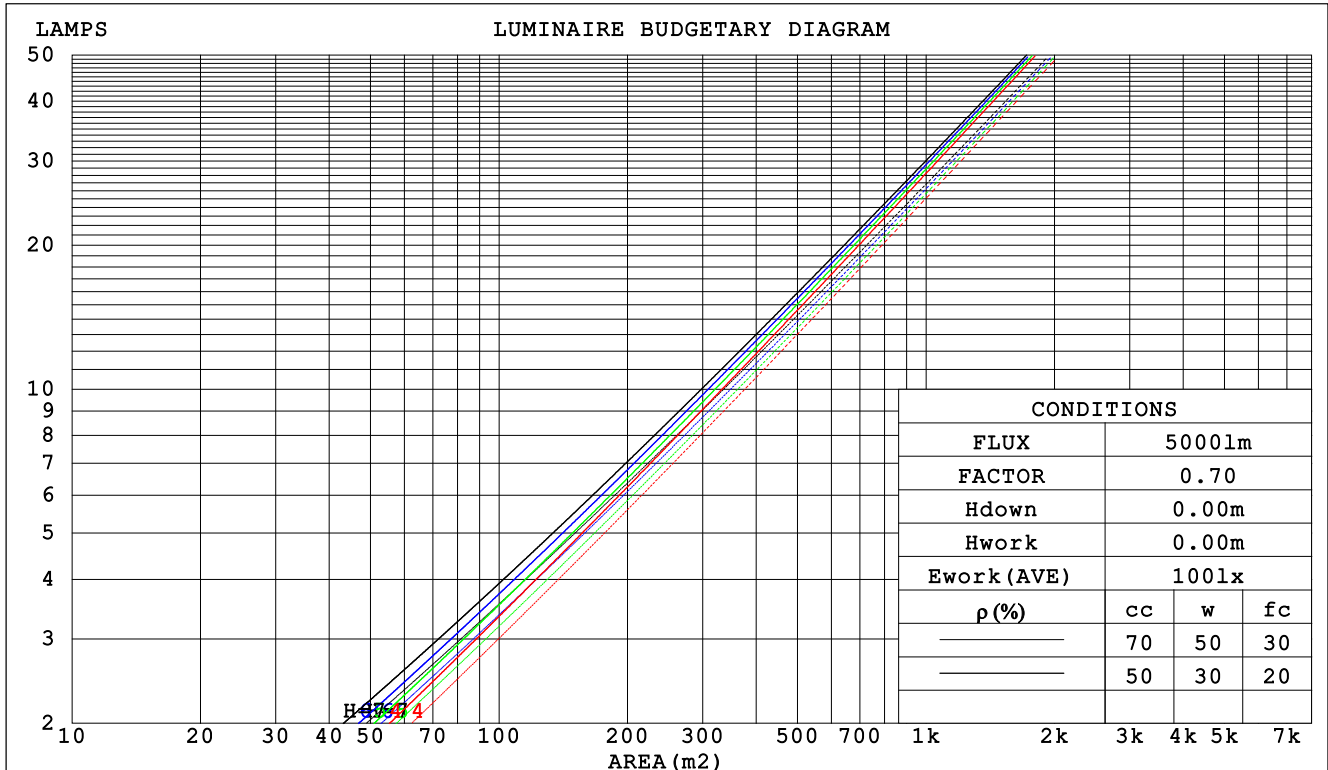

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2025-12-08

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7125]
Remarks:

WEC AND CCEC

Test:U:220.2V I:0.1280A P:26.841W PF:0.9522 Freq:50.02Hz		
Lamp Flux:4061.92x1 lm		
Name: PU-TL-P3-025-30D	Type: LED	
MFR.:		

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients (WEC)										
0.0																	
1.0	.161	.091	.029	.154	.088	.028	.141	.081	.026	.129	.074	.024	.118	.068	.022		
2.0	.152	.083	.025	.146	.080	.025	.135	.075	.023	.125	.070	.022	.115	.065	.021		
3.0	.143	.076	.023	.138	.074	.022	.129	.070	.021	.120	.066	.020	.112	.062	.019		
4.0	.135	.070	.021	.131	.069	.020	.123	.065	.020	.116	.062	.019	.109	.059	.018		
5.0	.129	.066	.019	.125	.064	.019	.118	.061	.018	.111	.059	.017	.105	.056	.017		
6.0	.122	.061	.018	.119	.060	.017	.113	.058	.017	.107	.056	.016	.102	.054	.016		
7.0	.117	.058	.016	.114	.057	.016	.109	.055	.016	.104	.053	.015	.099	.051	.015		
8.0	.112	.055	.015	.109	.054	.015	.104	.052	.015	.100	.051	.015	.096	.049	.014		
9.0	.107	.052	.014	.105	.051	.014	.100	.050	.014	.096	.048	.014	.093	.047	.014		
10.0	.103	.049	.014	.101	.049	.014	.097	.047	.013	.093	.046	.013	.090	.045	.013		

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)										
0.0	.198	.198	.198	.169	.169	.169	.116	.116	.116	.066	.066	.066	.021	.021	.021		
1.0	.178	.165	.154	.152	.142	.133	.104	.098	.092	.060	.056	.053	.019	.018	.017		
2.0	.161	.141	.123	.138	.121	.106	.095	.084	.074	.055	.049	.043	.018	.016	.014		
3.0	.148	.121	.100	.127	.105	.087	.087	.073	.061	.050	.042	.036	.016	.014	.012		
4.0	.137	.106	.083	.117	.092	.072	.081	.064	.051	.047	.038	.030	.015	.012	.010		
5.0	.127	.095	.070	.109	.082	.061	.075	.057	.043	.044	.034	.026	.014	.011	.008		
6.0	.119	.085	.060	.103	.074	.053	.071	.052	.037	.041	.030	.022	.013	.010	.007		
7.0	.113	.077	.052	.097	.067	.046	.067	.047	.032	.039	.028	.019	.013	.009	.006		
8.0	.107	.071	.046	.092	.061	.040	.063	.043	.029	.037	.025	.017	.012	.008	.006		
9.0	.101	.065	.041	.087	.057	.036	.060	.040	.026	.035	.024	.015	.011	.008	.005		
10.0	.097	.061	.037	.083	.053	.032	.058	.037	.023	.034	.022	.014	.011	.007	.005		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2025-12-08

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7125]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:220.2V I:0.1280A P:26.841W PF:0.9522 Freq:50.02Hz										
Lamp Flux:4061.92x1 lm										
Name: PU-TL-P3-025-30D					Type: LED					
MFR.:										
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	20.7	21.5	20.9	21.6	21.8	21.6	22.5	21.9	22.6	22.8
3H	20.5	21.3	20.8	21.5	21.7	21.5	22.2	21.8	22.4	22.7
4H	20.4	21.1	20.7	21.4	21.6	21.4	22.1	21.7	22.3	22.6
6H	20.4	21.0	20.7	21.3	21.5	21.3	22.0	21.6	22.2	22.5
8H	20.3	21.0	20.6	21.2	21.5	21.3	21.9	21.6	22.2	22.5
12H	20.3	20.9	20.6	21.2	21.5	21.2	21.8	21.6	22.1	22.4
4H 2H	20.4	21.1	20.7	21.4	21.6	21.4	22.1	21.7	22.3	22.6
3H	20.2	20.9	20.6	21.1	21.4	21.2	21.8	21.6	22.1	22.4
4H	20.2	20.7	20.5	21.0	21.4	21.1	21.7	21.5	22.0	22.3
6H	20.1	20.6	20.5	20.9	21.3	21.0	21.5	21.4	21.9	22.2
8H	20.1	20.5	20.5	20.9	21.3	21.0	21.4	21.4	21.8	22.2
12H	20.0	20.4	20.5	20.8	21.2	20.9	21.4	21.4	21.7	22.2
8H 4H	20.0	20.5	20.4	20.8	21.2	21.0	21.4	21.4	21.8	22.2
6H	19.9	20.3	20.4	20.7	21.1	20.9	21.3	21.3	21.7	22.1
8H	19.9	20.2	20.4	20.7	21.1	20.8	21.2	21.3	21.6	22.1
12H	19.9	20.2	20.4	20.6	21.1	20.8	21.1	21.3	21.5	22.0
12H 4H	20.0	20.4	20.4	20.8	21.2	20.9	21.3	21.4	21.7	22.1
6H	19.9	20.2	20.3	20.6	21.1	20.8	21.2	21.3	21.6	22.1
8H	19.8	20.1	20.3	20.6	21.1	20.8	21.1	21.3	21.5	22.0
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 3.6 / -11.5					+ 4.0 / -14.5				
1.5H	+ 6.4 / -11.5					+ 6.7 / -13.9				
2.0H	+ 5.3 / - 2.1					+ 6.4 / - 3.0				

CIE Pub.117, 4062 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 4.9)
Area: 0.0056 m2

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2025-12-08

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7125]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:220.2V I:0.1280A P:26.841W PF:0.9522 Freq:50.02Hz		
Lamp Flux:4061.92x1 lm		
Name: PU-TL-P3-025-30D	Type: LED	
MFR.:		


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	89	83	79	88	83	79	88	82	79	76
0.80	96	91	87	95	90	87	94	90	87	83
1.00	100	95	91	99	94	91	98	94	91	87
1.25	104	99	96	103	98	95	101	97	94	90
1.50	106	102	99	105	101	98	103	100	97	93
2.00	109	105	102	107	104	101	105	102	99	94
2.50	110	107	104	109	106	103	106	103	101	95
3.00	112	109	106	110	107	105	107	104	103	96
4.00	114	111	109	112	109	108	108	106	105	97
5.00	115	113	111	113	111	109	109	107	106	98
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2025-12-08

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7125]
Remarks:

ISOCANDELA DIAGRAM

Test:U:220.2V I:0.1280A P:26.841W PF:0.9522 Freq:50.02Hz		
Lamp Flux:4061.92x1 lm		
Name: PU-TL-P3-025-30D	Type: LED	
MFR.:		

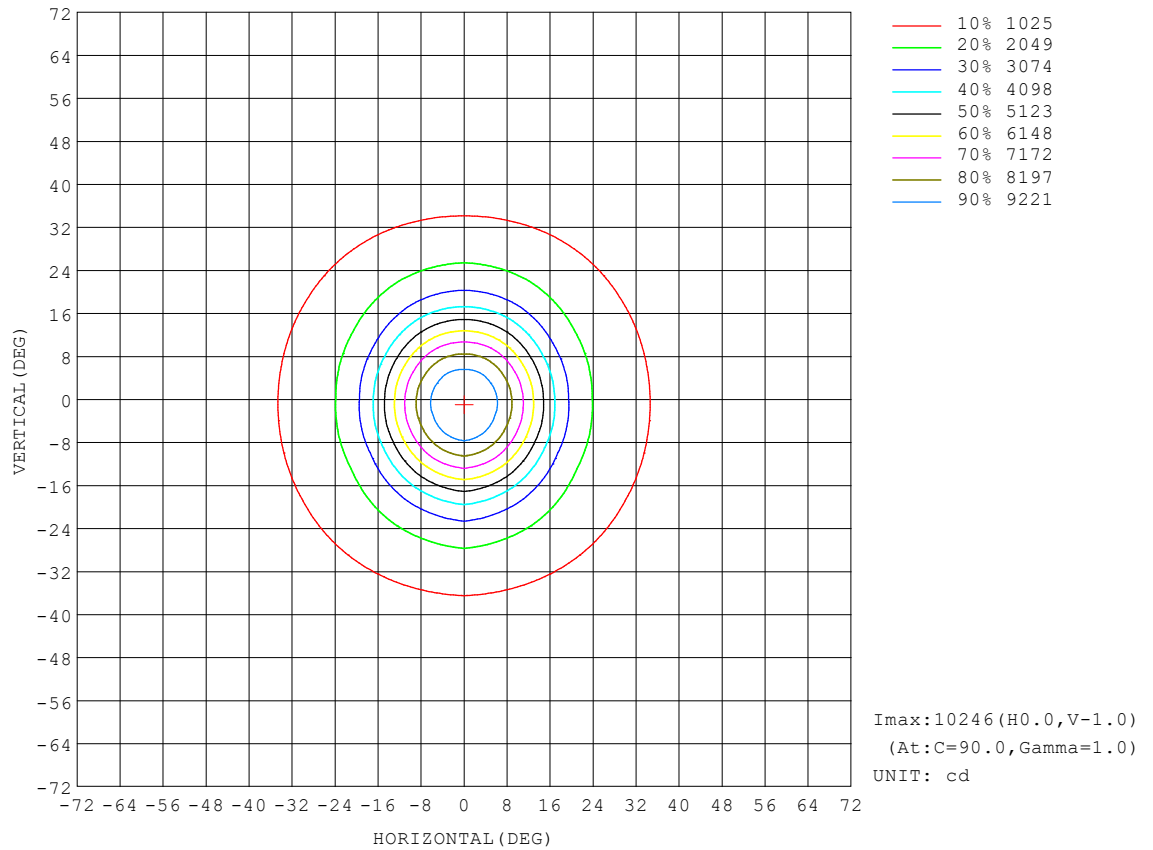


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2025-12-08

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7125]
Remarks:

AAI Figure

Test:U:220.2V I:0.1280A P:26.841W PF:0.9522 Freq:50.02Hz		
Lamp Flux:4061.92x1 lm		
Name: PU-TL-P3-025-30D	Type: LED	
MFR.:		

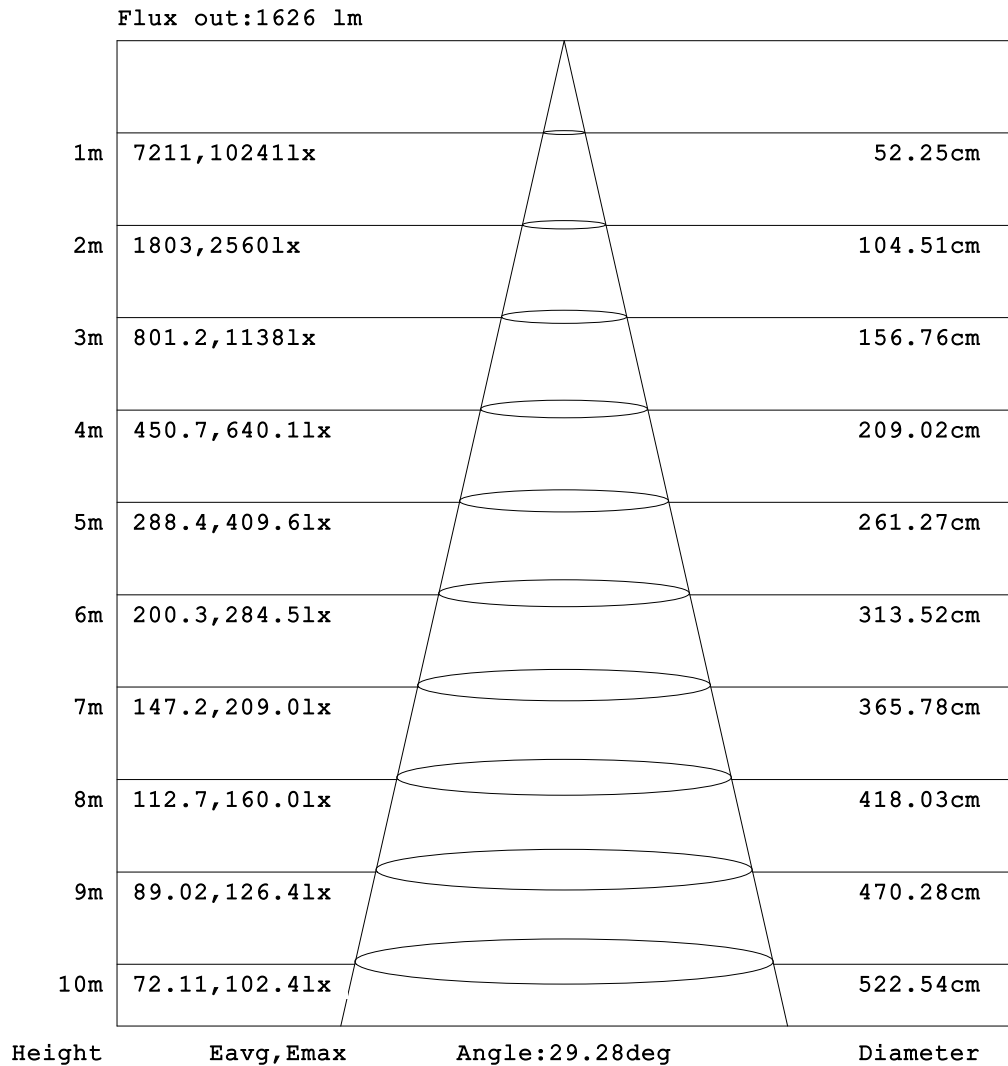


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2025-12-08

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7125]
Remarks:

ISOLUX DIAGRAM


Test:U:220.2V I:0.1280A P:26.841W PF:0.9522 Freq:50.02Hz		
Lamp Flux:4061.92x1 lm		
Name: PU-TL-P3-025-30D	Type: LED	
MFR.:		

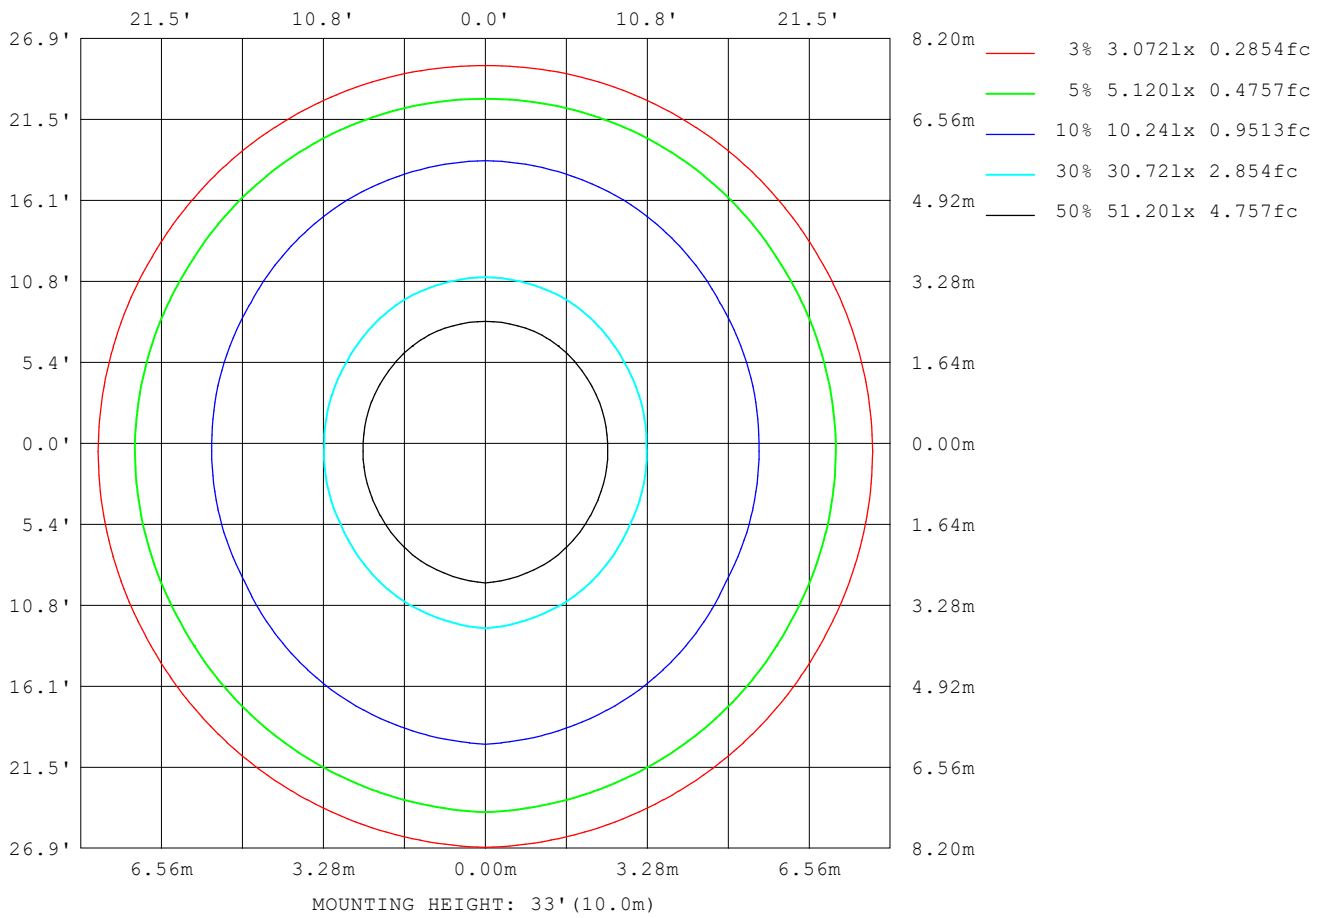

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2025-12-08

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7125]
Remarks:

Planar Illuminance Curve

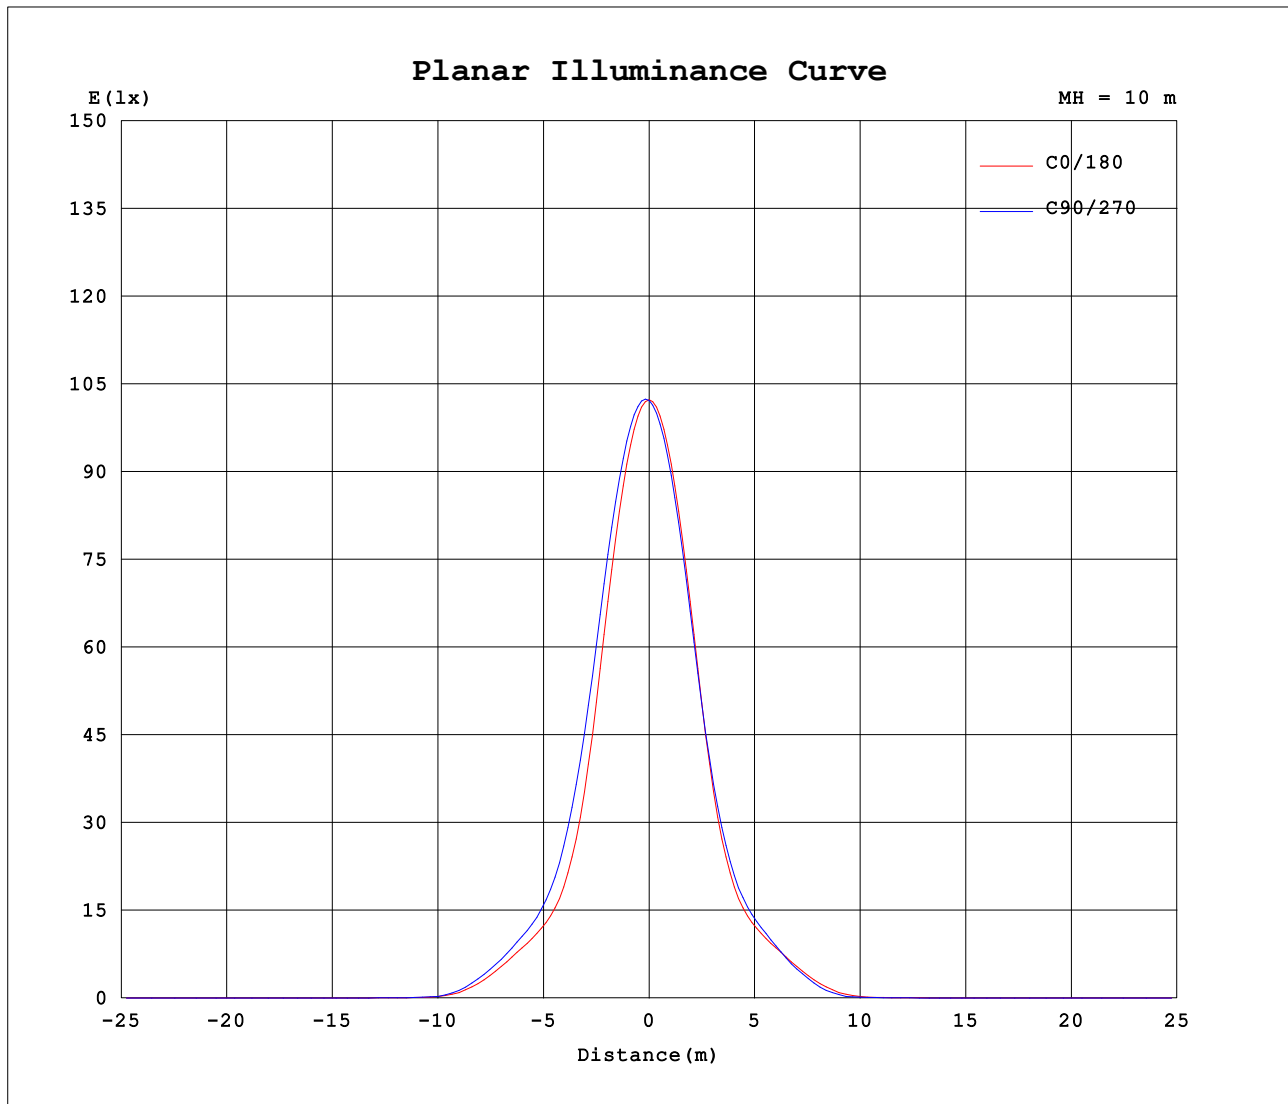

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2025-12-08

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7125]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.2V I:0.1280A P:26.841W PF:0.9522 Freq:50.02Hz		
Lamp Flux:4061.92x1 lm		
Name: PU-TL-P3-025-30D	Type: LED	
MFR.:		

Table--1

UNIT: ×10cd

C (DEG) γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	1023	1019	1021	1022	1021	1019	1023	1019	1021	1022	1021	1019						
5	957	965	979	989	979	965	957	946	944	939	944	946						
10	767	789	821	843	821	789	767	754	753	749	753	754						
15	500	529	579	612	579	529	500	492	504	504	504	492						
20	291	309	358	394	358	309	291	289	309	315	309	289						
25	189	197	226	250	226	197	189	191	204	210	204	191						
30	145	150	165	178	165	150	145	144	150	154	150	144						
35	98.6	102	112	121	112	102	98.6	93.0	92.5	91.1	92.5	93.0						
40	43.1	44.9	51.0	57.3	51.0	44.9	43.1	36.5	32.6	29.9	32.6	36.5						
45	8.06	7.58	9.11	8.90	9.11	7.58	8.06	4.67	4.96	5.11	4.96	4.67						
50	2.91	1.98	2.39	3.28	2.39	1.98	2.91	2.16	2.34	2.63	2.34	2.16						
55	2.02	1.26	1.40	1.81	1.40	1.26	2.02	1.46	1.52	1.66	1.52	1.46						
60	1.42	0.86	0.92	1.09	0.92	0.86	1.42	1.08	1.09	1.13	1.09	1.08						
65	0.98	0.60	0.62	0.70	0.62	0.60	0.98	0.84	0.83	0.84	0.83	0.84						
70	0.68	0.40	0.42	0.45	0.42	0.40	0.68	0.72	0.71	0.71	0.71	0.72						
75	0.53	0.28	0.29	0.30	0.29	0.28	0.53	0.73	0.71	0.72	0.71	0.73						
80	0.49	0.21	0.21	0.22	0.21	0.21	0.49	0.79	0.78	0.78	0.78	0.79						
85	0.45	0.11	0.11	0.11	0.11	0.11	0.45	0.82	0.82	0.82	0.82	0.82						
90	0.47	0.07	0.07	0.07	0.07	0.07	0.47	0.89	0.89	0.89	0.89	0.89						
95	0.53	0.10	0.10	0.10	0.10	0.10	0.53	0.96	0.96	0.96	0.96	0.96						
100	0.58	0.15	0.15	0.15	0.15	0.15	0.58	1.00	1.01	1.01	1.01	1.00						
105	0.64	0.21	0.21	0.21	0.21	0.21	0.64	1.06	1.07	1.07	1.07	1.06						
110	0.72	0.30	0.29	0.29	0.29	0.30	0.72	1.15	1.15	1.15	1.15	1.15						
115	0.82	0.39	0.38	0.37	0.38	0.39	0.82	1.25	1.24	1.24	1.24	1.25						
120	0.90	0.46	0.45	0.44	0.45	0.46	0.90	1.31	1.28	1.27	1.28	1.31						
125	0.92	0.49	0.48	0.48	0.48	0.49	0.92	1.28	1.25	1.24	1.25	1.28						
130	0.87	0.50	0.49	0.49	0.49	0.50	0.87	1.17	1.15	1.13	1.15	1.17						
135	0.79	0.48	0.48	0.48	0.48	0.48	0.79	1.01	0.99	0.98	0.99	1.01						
140	0.69	0.45	0.46	0.46	0.46	0.45	0.69	0.84	0.83	0.83	0.83	0.84						
145	0.60	0.45	0.45	0.45	0.45	0.45	0.60	0.71	0.71	0.71	0.71	0.71						
150	0.55	0.44	0.44	0.45	0.44	0.44	0.55	0.62	0.62	0.62	0.62	0.62						
155	0.51	0.43	0.43	0.44	0.43	0.43	0.51	0.55	0.55	0.56	0.55	0.55						
160	0.46	0.40	0.40	0.41	0.40	0.40	0.46	0.48	0.48	0.48	0.48	0.48						
165	0.40	0.37	0.37	0.37	0.37	0.37	0.40	0.40	0.40	0.40	0.40	0.40						
170	0.35	0.33	0.33	0.33	0.33	0.33	0.35	0.35	0.34	0.33	0.34	0.35						
175	0.31	0.30	0.30	0.30	0.30	0.30	0.31	0.31	0.31	0.30	0.31	0.31						
180	0.30	0.30	0.30	0.30	0.30	0.30	0.30	0.30	0.30	0.30	0.30	0.30						

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2025-12-08

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7125]
Remarks: