



LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:220.4V I:0.2584A P:54.837W PF:0.9631 Freq:49.99Hz Lamp Flux:8693.8x1 lm		
Name: PU-LI-55W-4000K	Type: LED	
MFR.:		

DATA OF LAMP		PHOTOMETRIC DATA Eff: 158.54 lm/W			
MODEL		I _{max} (cd)	5865	S/MH (C0/180)	1.14
NOMINAL POWER (W)	55	LOR (%)	100.0	S/MH (C90/270)	1.10
RATED VOLTAGE (V)	220	TOTAL FLUX (lm)	8693.8	η UP, DN (C0-180)	0.3, 52.7
NOMINAL FLUX (lm)	8693.8	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.6, 46.4
LAMPS INSIDE	1	η up (%)	0.9	CIBSE SHR NOM	1.00
TEST VOLTAGE (V)	220	η down (%)	99.1	CIBSE SHR MAX	1.15

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

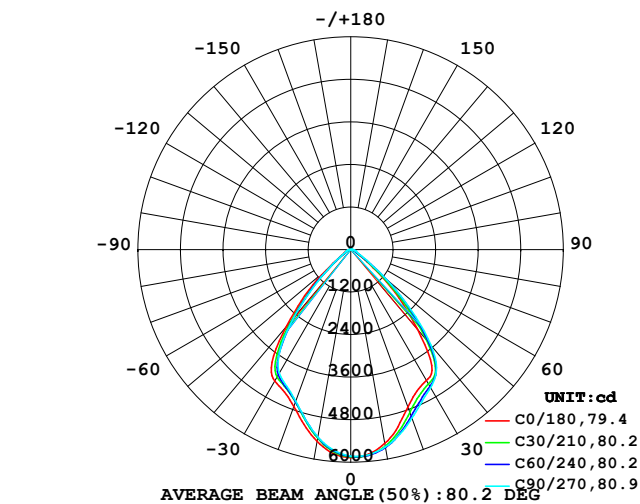

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

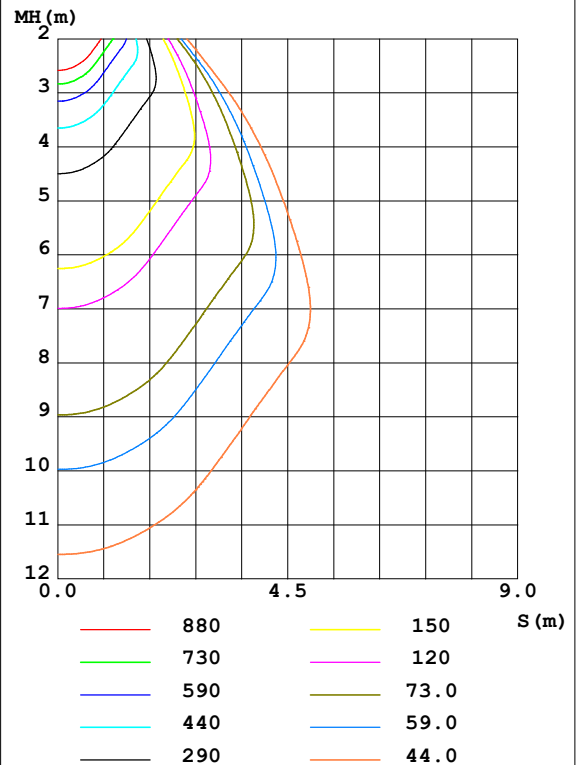

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2026-08-17

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7125]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	5550	5648	5652	5539	5489	5387	5366	5434	0- 10	541.2	541.2	6.23,6.23
20	4722	4943	5058	4868	4706	4568	4551	4621	10- 20	1445	1986	22.8,22.8
30	4268	4423	4502	4376	4285	4120	4028	4136	20- 30	2066	4052	46.6,46.6
40	2920	3375	3530	3187	2809	2547	2495	2697	30- 40	2358	6410	73.7,73.7
50	967.1	1226	1327	1102	898.5	733.8	741.7	833.5	40- 50	1462	7871	90.5,90.5
60	226.0	257.2	307.3	240.8	229.8	192.9	214.4	208.2	50- 60	438.4	8310	95.6,95.6
70	120.0	124.8	151.7	125.4	132.3	111.8	129.5	111.9	60- 70	163.3	8473	97.5,97.5
80	54.55	67.42	93.09	68.14	71.06	62.45	70.42	63.07	70- 80	102.6	8576	98.6,98.6
90	4.040	6.608	10.75	7.905	17.56	16.67	17.41	18.76	80- 90	39.71	8615	99.1,99.1
100	4.953	4.662	4.663	5.193	17.61	17.89	18.46	19.95	90-100	12.35	8628	99.2,99.2
110	6.182	5.826	5.839	6.407	18.90	18.65	18.80	20.43	100-110	12.95	8641	99.4,99.4
120	7.557	7.128	7.081	7.792	19.49	18.70	18.54	20.14	110-120	12.95	8654	99.5,99.5
130	8.781	8.397	8.362	9.066	18.87	17.87	17.59	18.99	120-130	12.09	8666	99.7,99.7
140	9.570	9.356	9.401	9.995	17.51	16.50	15.99	17.22	130-140	10.38	8676	99.8,99.8
150	10.07	9.843	9.969	10.50	15.92	14.83	14.04	14.92	140-150	8.114	8684	99.9,99.9
160	9.840	9.851	10.05	10.29	13.75	12.77	12.21	12.55	150-160	5.564	8690	100,100
170	9.520	9.643	9.770	9.758	11.11	10.78	10.57	10.58	160-170	3.074	8693	100,100
180	9.695	9.674	9.661	9.429	9.714	9.669	9.651	9.429	170-180	0.9479	8694	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 7300.6 lm

%lum = 84.0%

%lamp = 84.0%

Conical surface Flux(120deg): 8309.7 lm

%lum = 95.6%


%lamp = 95.6%

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2026-08-17

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity:65.0%
 Test Distance:8.000m [K=0.7125]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:220.4V I:0.2584A P:54.837W PF:0.9631 Freq:49.99Hz Lamp Flux:8693.8x1 lm		
Name: PU-LI-55W-4000K	Type: LED	
MFR.:		

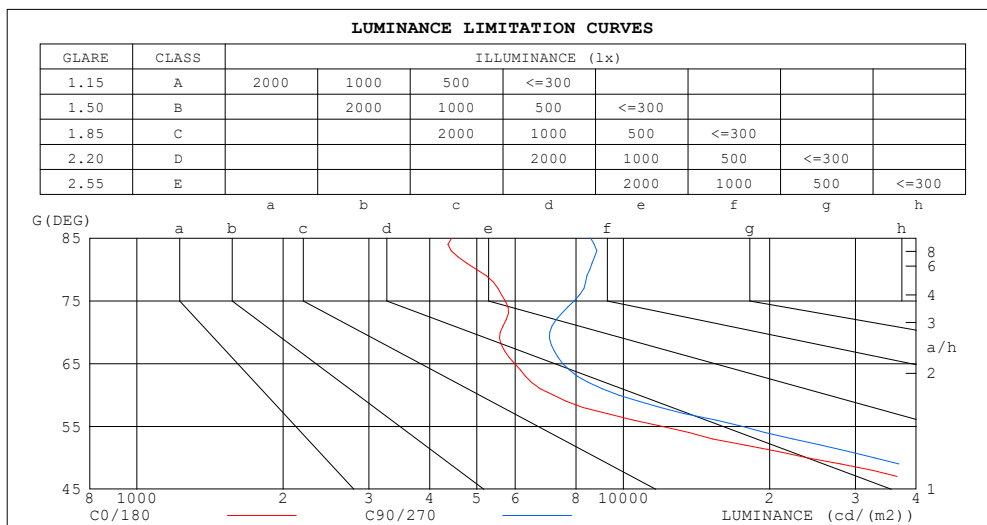

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	4435	8572
80	5002	8536
75	5720	7927
70	5585	7061
65	5992	7516
60	7197	9785
55	12054	17599
50	23957	32876
45	43611	54033


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2026-08-17

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7125]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:220.4V I:0.2584A P:54.837W PF:0.9631 Freq:49.99Hz		
Lamp Flux:8693.8x1 lm		
Name: PU-LI-55W-4000K	Type: LED	
MFR.:		

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.01	1.01	1.01	.99
1.0	1.08	1.05	1.03	1.06	1.03	1.01	1.02	.90	.98	.98	.96	.95	.94	.93	.92	.90
2.0	.99	.94	.90	.97	.92	.89	.93	.90	.87	.90	.87	.84	.87	.85	.83	.81
3.0	.90	.84	.79	.89	.83	.79	.86	.81	.77	.83	.79	.76	.81	.77	.74	.73
4.0	.82	.76	.71	.81	.75	.70	.79	.73	.69	.77	.72	.68	.74	.71	.67	.66
5.0	.76	.69	.63	.75	.68	.63	.73	.67	.62	.71	.66	.62	.69	.65	.61	.59
6.0	.70	.62	.57	.69	.62	.57	.67	.61	.57	.65	.60	.56	.64	.59	.56	.54
7.0	.64	.57	.52	.64	.57	.52	.62	.56	.51	.61	.55	.51	.59	.54	.51	.49
8.0	.60	.52	.48	.59	.52	.47	.58	.51	.47	.56	.51	.47	.55	.50	.47	.45
9.0	.55	.48	.44	.55	.48	.44	.54	.48	.43	.53	.47	.43	.52	.47	.43	.41
10.0	.52	.45	.40	.51	.45	.40	.50	.44	.40	.49	.44	.40	.48	.43	.40	.38

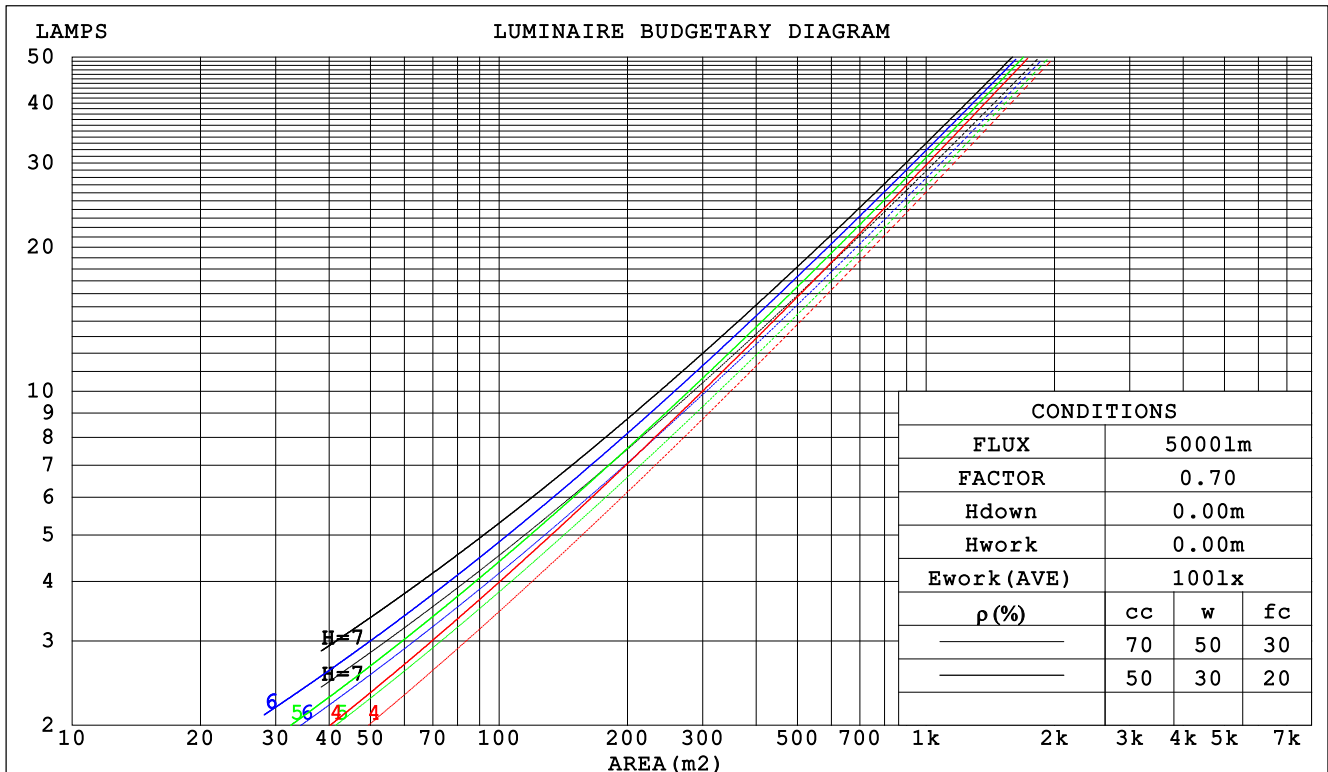

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2026-08-17

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7125]
Remarks:

WEC AND CCEC

Test:U:220.4V I:0.2584A P:54.837W PF:0.9631 Freq:49.99Hz		
Lamp Flux:8693.8x1 lm		
Name: PU-LI-55W-4000K	Type: LED	
MFR.:		

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients (WEC)										
0.0																	
1.0	.217	.124	.039	.210	.120	.038	.197	.113	.036	.185	.107	.034	.173	.101	.032		
2.0	.209	.115	.035	.203	.112	.034	.192	.107	.033	.181	.102	.032	.172	.097	.031		
3.0	.199	.106	.032	.194	.104	.031	.184	.100	.030	.175	.096	.029	.166	.092	.029		
4.0	.189	.098	.029	.185	.097	.029	.176	.093	.028	.168	.090	.027	.160	.087	.027		
5.0	.180	.092	.027	.176	.090	.026	.168	.087	.026	.161	.085	.025	.154	.082	.025		
6.0	.171	.085	.024	.167	.084	.024	.160	.082	.024	.154	.080	.023	.148	.078	.023		
7.0	.162	.080	.023	.159	.079	.023	.153	.077	.022	.147	.075	.022	.141	.073	.022		
8.0	.154	.075	.021	.151	.074	.021	.146	.073	.021	.140	.071	.021	.136	.070	.020		
9.0	.147	.071	.020	.144	.070	.020	.139	.069	.019	.134	.067	.019	.130	.066	.019		
10.0	.140	.067	.019	.138	.066	.019	.133	.065	.018	.129	.064	.018	.125	.063	.018		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.197	.197	.197	.169	.169	.169	.115	.115	.115	.066	.066	.066	.021	.021	.021	
1.0	.181	.164	.149	.155	.141	.128	.106	.097	.088	.061	.056	.051	.020	.018	.017	
2.0	.168	.139	.115	.144	.120	.099	.099	.083	.069	.057	.048	.041	.018	.016	.013	
3.0	.158	.121	.091	.135	.104	.079	.093	.072	.056	.054	.042	.033	.017	.014	.011	
4.0	.149	.107	.074	.128	.092	.065	.088	.064	.045	.051	.038	.027	.016	.012	.009	
5.0	.142	.096	.062	.122	.083	.054	.084	.058	.038	.049	.034	.023	.016	.011	.007	
6.0	.135	.087	.052	.116	.075	.046	.080	.053	.032	.046	.031	.019	.015	.010	.006	
7.0	.129	.080	.045	.111	.069	.040	.076	.048	.028	.044	.029	.017	.014	.009	.006	
8.0	.123	.074	.040	.106	.064	.035	.073	.045	.025	.043	.026	.015	.014	.009	.005	
9.0	.118	.069	.036	.102	.060	.031	.070	.042	.022	.041	.025	.013	.013	.008	.004	
10.0	.113	.065	.032	.098	.056	.028	.068	.039	.020	.039	.023	.012	.013	.008	.004	

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2026-08-17

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity:65.0%
 Test Distance:8.000m [K=0.7125]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:220.4V I:0.2584A P:54.837W PF:0.9631 Freq:49.99Hz										
Lamp Flux:8693.8x1 lm										
Name: PU-LI-55W-4000K					Type: LED					
MFR.:										
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	22.6	23.7	22.8	23.9	24.1	23.3	24.5	23.6	24.7	24.9
3H	22.5	23.6	22.8	23.8	24.0	23.3	24.3	23.5	24.5	24.8
4H	22.5	23.5	22.8	23.7	24.0	23.3	24.3	23.6	24.5	24.8
6H	22.4	23.4	22.8	23.7	23.9	23.3	24.2	23.6	24.5	24.8
8H	22.4	23.3	22.8	23.6	23.9	23.3	24.2	23.7	24.5	24.8
12H	22.4	23.3	22.7	23.6	23.9	23.3	24.2	23.7	24.5	24.8
4H 2H	22.4	23.4	22.7	23.6	23.9	23.1	24.1	23.4	24.3	24.6
3H	22.4	23.2	22.7	23.5	23.8	23.1	24.0	23.4	24.3	24.6
4H	22.4	23.2	22.8	23.5	23.8	23.2	24.0	23.5	24.3	24.6
6H	22.4	23.1	22.8	23.5	23.8	23.3	24.0	23.7	24.3	24.7
8H	22.4	23.1	22.8	23.4	23.8	23.4	24.0	23.8	24.4	24.8
12H	22.4	23.0	22.8	23.4	23.8	23.4	24.0	23.8	24.4	24.8
8H 4H	22.3	23.0	22.7	23.3	23.7	23.1	23.7	23.5	24.1	24.5
6H	22.4	22.9	22.9	23.3	23.8	23.3	23.8	23.7	24.2	24.6
8H	22.4	22.9	22.9	23.3	23.8	23.4	23.8	23.8	24.3	24.7
12H	22.5	22.9	22.9	23.3	23.8	23.5	23.9	24.0	24.3	24.8
12H 4H	22.3	22.9	22.7	23.3	23.7	23.1	23.6	23.5	24.0	24.4
6H	22.4	22.9	22.9	23.3	23.8	23.2	23.7	23.7	24.1	24.6
8H	22.4	22.8	22.9	23.3	23.8	23.4	23.8	23.9	24.2	24.7
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 2.0 / - 4.5					+ 1.8 / - 3.5				
1.5H	+ 2.5 / - 4.1					+ 2.1 / - 3.7				
2.0H	+ 4.6 / - 3.8					+ 4.5 / - 3.7				

CIE Pub.117, 8694 lm Total Lamp Luminous Flux Corrected ($8\log(F/F_0) = 7.5$)
Area: 0.0628 m²

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2026-08-17

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7125]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:220.4V I:0.2584A P:54.837W PF:0.9631 Freq:49.99Hz Lamp Flux:8693.8x1 lm		
Name: PU-LI-55W-4000K	Type: LED	
MFR.:		


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	75	66	61	74	66	61	73	66	61	56
0.80	84	76	71	83	76	71	82	75	70	65
1.00	91	83	78	90	83	78	88	83	77	72
1.25	96	89	85	95	89	84	93	87	83	78
1.50	100	93	89	98	93	88	96	91	87	82
2.00	104	99	95	103	98	94	100	95	92	86
2.50	106	101	97	105	100	97	101	98	95	88
3.00	109	104	101	107	103	99	103	100	97	90
4.00	111	107	104	109	106	103	105	102	100	92
5.00	113	109	107	110	107	105	106	104	102	93
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2026-08-17

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity: 65.0%
 Test Distance: 8.000m [K=0.7125]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:220.4V I:0.2584A P:54.837W PF:0.9631 Freq:49.99Hz Lamp Flux:8693.8x1 lm		
Name: PU-LI-55W-4000K	Type: LED	
MFR.:		

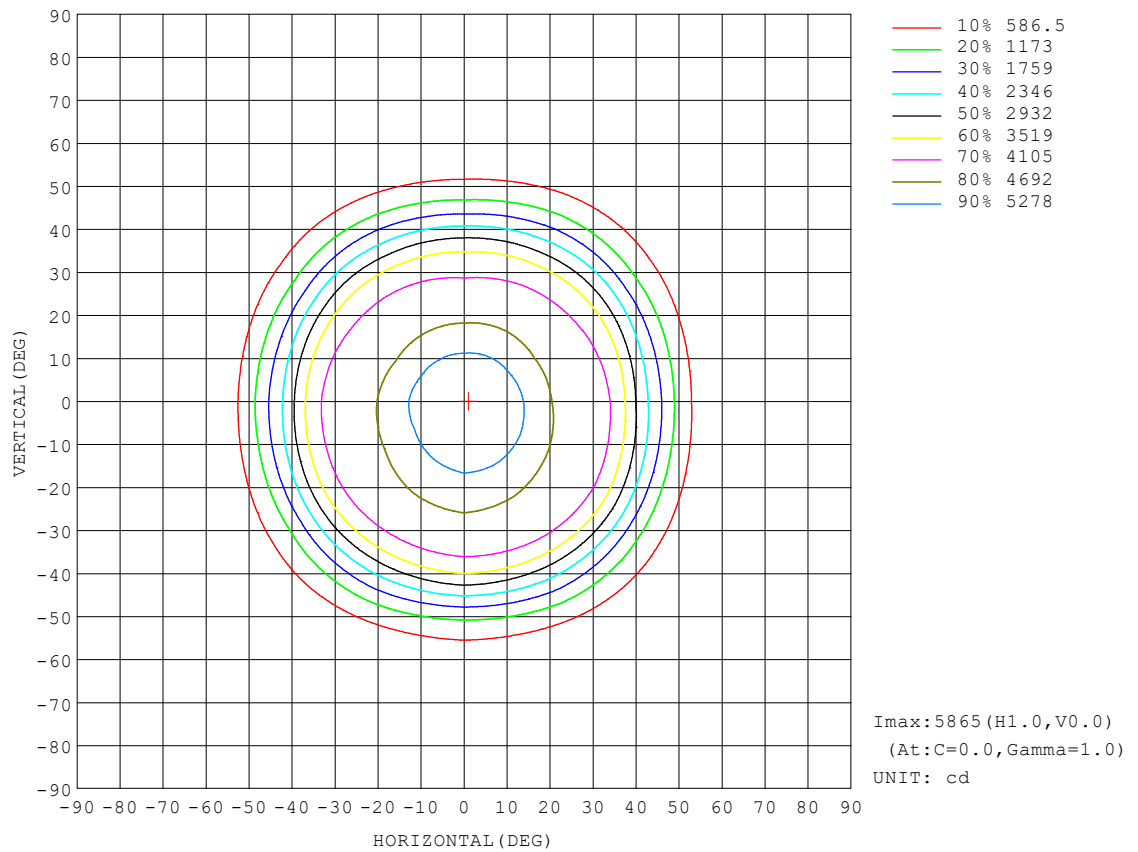


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2026-08-17

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7125]
Remarks:

AAI Figure

Test:U:220.4V I:0.2584A P:54.837W PF:0.9631 Freq:49.99Hz Lamp Flux:8693.8x1 lm		
Name: PU-LI-55W-4000K	Type: LED	
MFR.:		

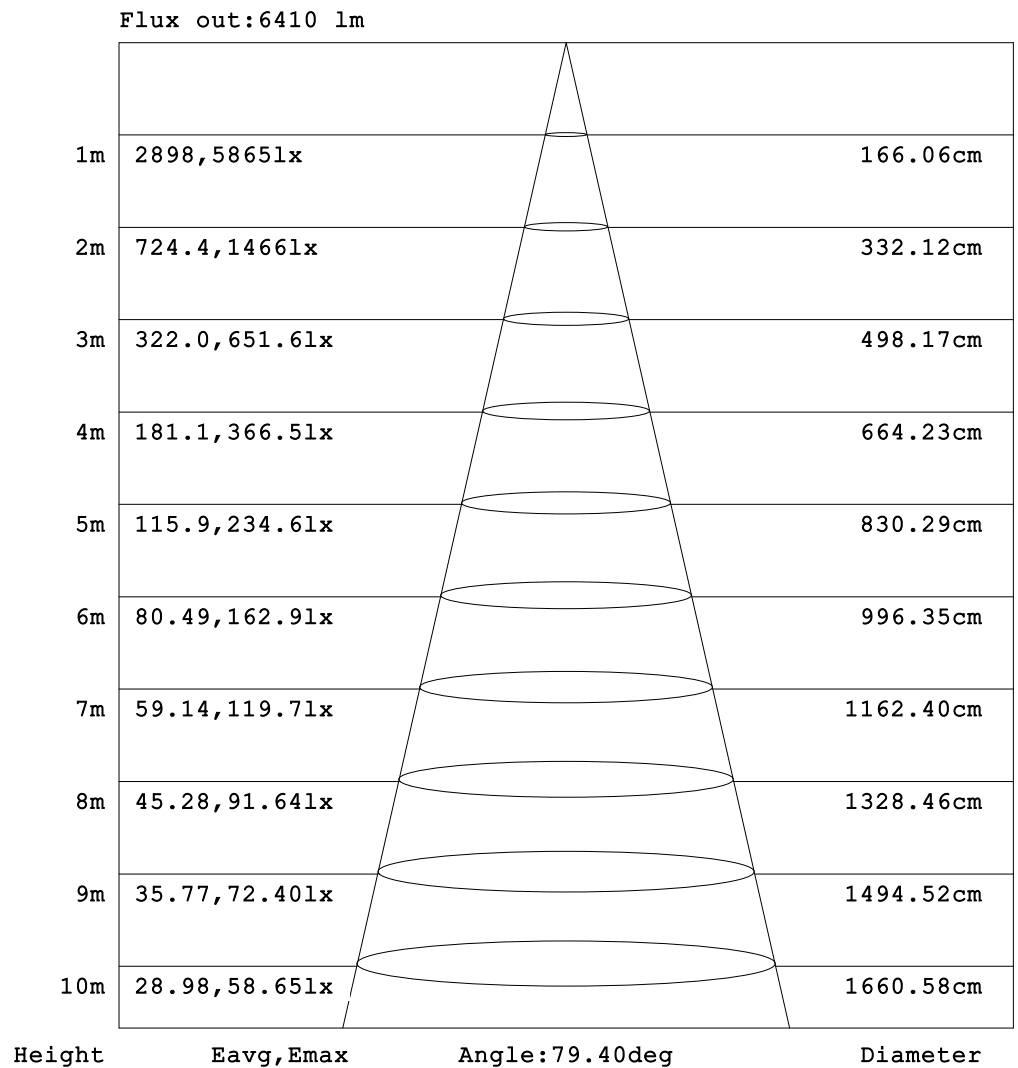


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2026-08-17

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7125]
Remarks:

ISOLUX DIAGRAM


Test:U:220.4V I:0.2584A P:54.837W PF:0.9631 Freq:49.99Hz Lamp Flux:8693.8x1 lm		
Name: PU-LI-55W-4000K	Type: LED	
MFR.:		

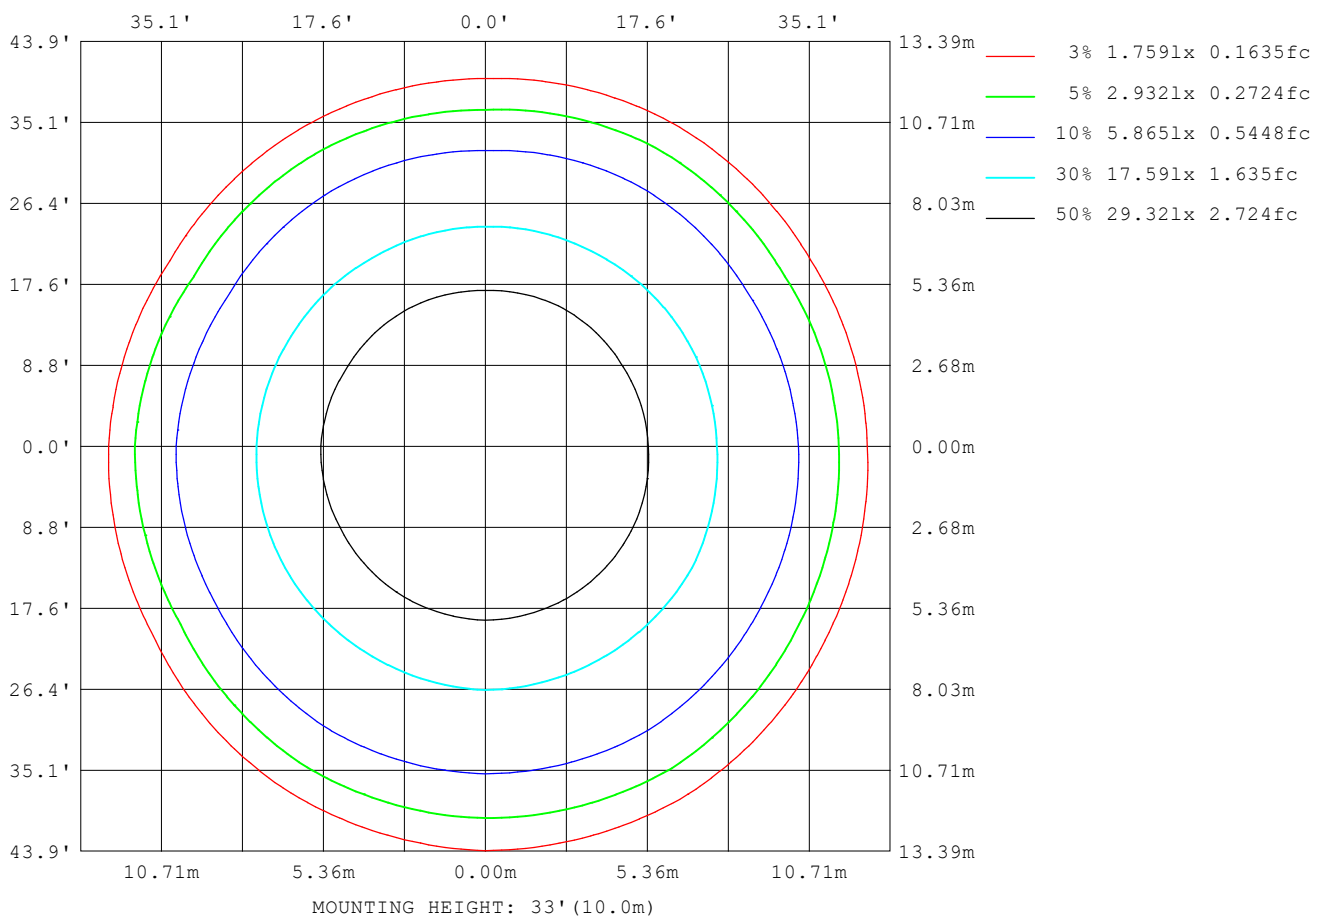

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2026-08-17

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7125]
Remarks:

Planar Illuminance Curve

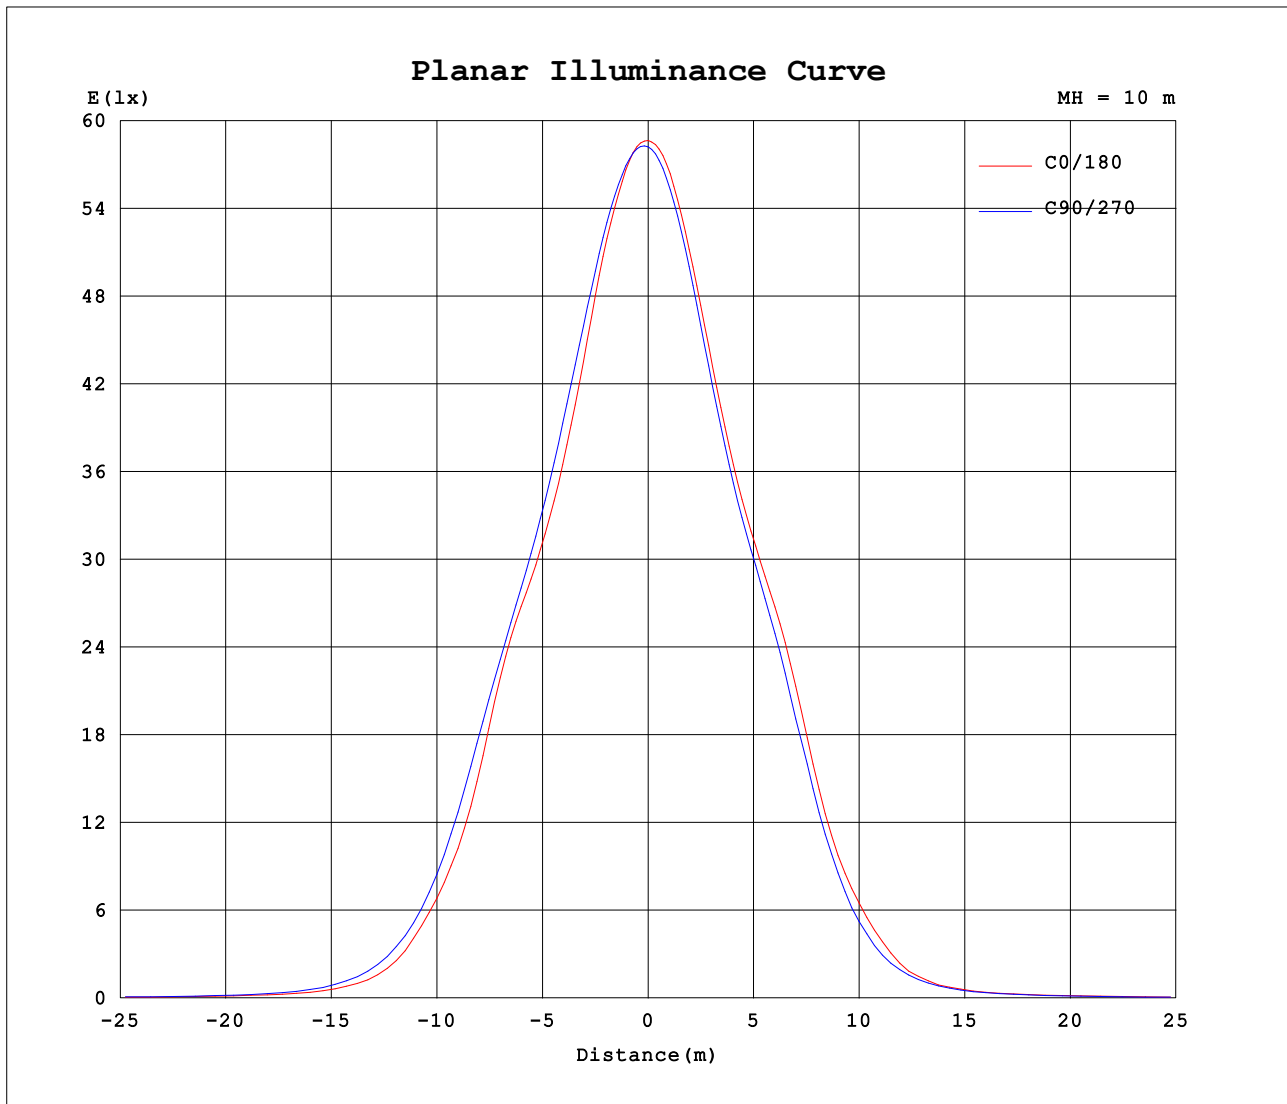

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2026-08-17

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7125]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.4V I:0.2584A P:54.837W PF:0.9631 Freq:49.99Hz		
Lamp Flux:8693.8x1 lm		
Name: PU-LI-55W-4000K	Type: LED	
MFR.:		

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330							
0	5865	5848	5835	5822	5816	5811	5865	5848	5835	5822	5816	5811							
5	5796	5822	5824	5807	5776	5744	5772	5719	5690	5672	5693	5718							
10	5550	5628	5668	5652	5586	5491	5489	5400	5375	5366	5415	5453							
15	5168	5291	5365	5384	5281	5152	5107	4982	4956	4953	5015	5058							
20	4722	4884	5002	5058	4951	4784	4706	4570	4566	4551	4613	4629							
25	4414	4561	4679	4743	4650	4507	4434	4319	4302	4264	4321	4331							
30	4268	4383	4463	4502	4425	4327	4285	4153	4086	4028	4107	4165							
35	3988	4173	4204	4214	4096	4006	3880	3639	3501	3476	3599	3778							
40	2920	3320	3429	3530	3296	3077	2809	2595	2498	2495	2605	2789							
45	1937	2142	2340	2399	2219	1932	1839	1542	1546	1482	1649	1705							
50	967	1113	1338	1327	1235	968	898	730	738	742	821	846							
55	434	491	579	634	533	428	397	332	330	369	373	394							
60	226	242	273	307	257	224	230	194	191	214	204	213							
65	159	156	175	199	172	154	176	142	142	153	146	142							
70	120	116	133	152	133	118	132	111	113	129	115	109							
75	93.0	88.2	105	129	105	89.7	108	87.2	91.1	105	93.4	86.7							
80	54.6	60.9	73.9	93.1	72.9	63.3	71.1	61.3	63.6	70.4	65.4	60.8							
85	24.3	28.7	37.3	46.9	37.3	31.1	39.9	34.2	33.1	33.9	34.4	33.6							
90	4.04	5.36	7.85	10.8	8.42	7.39	17.6	16.5	16.9	17.4	19.2	18.4							
95	4.41	4.17	4.12	4.14	4.38	4.96	16.8	17.1	17.4	18.0	19.7	19.1							
100	4.95	4.69	4.63	4.66	4.90	5.48	17.6	17.8	18.0	18.5	20.1	19.8							
105	5.55	5.26	5.20	5.25	5.50	6.04	18.3	18.4	18.3	18.7	20.2	20.4							
110	6.18	5.87	5.78	5.84	6.13	6.68	18.9	18.8	18.5	18.8	20.2	20.7							
115	6.87	6.53	6.40	6.44	6.79	7.39	19.3	19.0	18.6	18.7	20.0	20.8							
120	7.56	7.21	7.05	7.08	7.46	8.12	19.5	18.9	18.5	18.5	19.6	20.6							
125	8.21	7.88	7.70	7.74	8.13	8.79	19.3	18.6	18.1	18.2	19.1	20.2							
130	8.78	8.48	8.32	8.36	8.75	9.38	18.9	18.1	17.6	17.6	18.5	19.5							
135	9.23	9.00	8.86	8.93	9.30	9.87	18.2	17.5	17.0	16.9	17.6	18.7							
140	9.57	9.41	9.30	9.40	9.75	10.2	17.5	16.8	16.2	16.0	16.6	17.8							
145	9.87	9.71	9.62	9.75	10.1	10.5	16.7	16.0	15.4	15.1	15.5	16.8							
150	10.1	9.88	9.80	9.97	10.3	10.7	15.9	15.2	14.5	14.0	14.3	15.5							
155	10.1	9.92	9.87	10.1	10.3	10.7	15.0	14.2	13.5	13.1	13.2	14.2							
160	9.84	9.82	9.88	10.1	10.2	10.4	13.8	13.0	12.5	12.2	12.2	12.9							
165	9.61	9.67	9.83	9.95	9.96	10.1	12.4	11.9	11.6	11.4	11.3	11.7							
170	9.52	9.59	9.70	9.77	9.75	9.77	11.1	10.8	10.7	10.6	10.5	10.7							
175	9.54	9.54	9.63	9.63	9.59	9.56	10.2	10.1	10.0	9.94	9.86	9.67							
180	9.69	9.66	9.69	9.66	9.55	9.31	9.71	9.64	9.70	9.65	9.56	9.30							

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2026-08-17

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7125]
Remarks: